


STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	CM-285-I(378)	33	110

**GENERAL NOTES:**

1. INSTALL CABLE NAV05-0235 IN CONDUIT #1 OF THE DUCT BANK FROM THE PB AT STA. 503+00 +/- (ON I-285 EB) TO THE EXISTING ECB AT STA. 597+50 +/- (ON I-285 EB). INSTALL CABLE COILS AND CLOSURES FOR NAV05-0235 ON THE LOWEST RACK POSITION OF THE PULL BOXES.
2. INSTALL CABLE NAV05-0228 IN CONDUIT #1 OF THE DUCT BANK FROM THE PB AT STA. 505+50 +/- (ON I-285 WB) TO THE EXISTING ECB AT STA. 538+00 +/- (ON I-285 WB). INSTALL CABLE COILS AND CLOSURES FOR NAV05-0228 ON THE LOWEST RACK POSITION OF THE PULL BOXES.
3. INSTALL CABLE NAV05-0228 IN EXISTING UNOCCUPIED CONDUIT (IDENTIFIED DURING CONSTRUCTION) FROM THE EXISTING ECB AT STA. 538+00 +/- (ON I-285 WB) TO THE EXISTING ECB AT STA. 704 + II +/- (ON THE RAMP FROM I-75 SB)
4. INSTALL CABLE NAV05-0235 IN EXISTING UNOCCUPIED CONDUIT (IDENTIFIED DURING CONSTRUCTION) FROM THE EXISTING ECB AT STA. 597+50 +/- (ON I-285 EB) TO THE EXISTING ECB AT STA. 597 + 45 +/- (ON I-285 WB).
5. INSTALL CABLE NAV05-0235 IN EXISTING UNOCCUPIED CONDUIT (IDENTIFIED DURING CONSTRUCTION) FROM THE EXISTING ECB AT STA. 597+45 +/- (ON I-285 WB) TO THE EXISTING ECB AT STA. 633+20 +/- (ON I-285 WB).
6. INSTALL CABLE NAV05-0235 IN CONDUIT #1 CROSSING THE LOOP ROAD BRIDGE FROM THE EXISTING ECB AT STA. 633+20+ (ON I-285 WB) TO THE PB AT STA. 635+00 +/- (ON I-285 EB). INSTALL CABLE COILS AND CLOSURES FOR NAV05-0235 ON THE LOWEST RACK POSITION OF THE PULL BOXES AND ECBS.
7. INSTALL CABLE NAV05-0235 IN CONDUIT #1 OF THE DUCT BANK FROM THE PB AT STA. 635+00 +/- (ON I-285 EB) TO THE EXISTING ECB AT STA. 704+10 +/- (ON I-285 EBCD). INSTALL CABLE COILS AND CLOSURE FOR NAV05-0235 ON THE LOWEST RACK POSITION OF THE PULLBOXES.
8. INSTALL CABLE NAV05-0235 IN EXISTING UNOCCUPIED CONDUIT (IDENTIFIED DURING CONSTRUCTION) FROM THE EXISTING ECB AT STA. 704+10 +/- (ON I-285 EB) TO THE EXISTING ECB (ON I-75 SB).
9. INSTALL CABLE NAV05-0235 IN EXISTING UNOCCUPIED CONDUIT (IDENTIFIED DURING CONSTRUCTION) FROM THE EXISTING ECB (ON I-75 SB) TO THE EXISTING ECB (OFF I-75 SB) AT HUB L.
10. INSTALL CABLE NAV05-0228 IN EXISTING UNOCCUPIED CONDUIT (IDENTIFIED DURING CONSTRUCTION) AT STA. 704+II +/- (ON THE RAMP FROM I-75 NB) TO THE EXISTING ECB (OFF I-75 NB) AT HUB L.

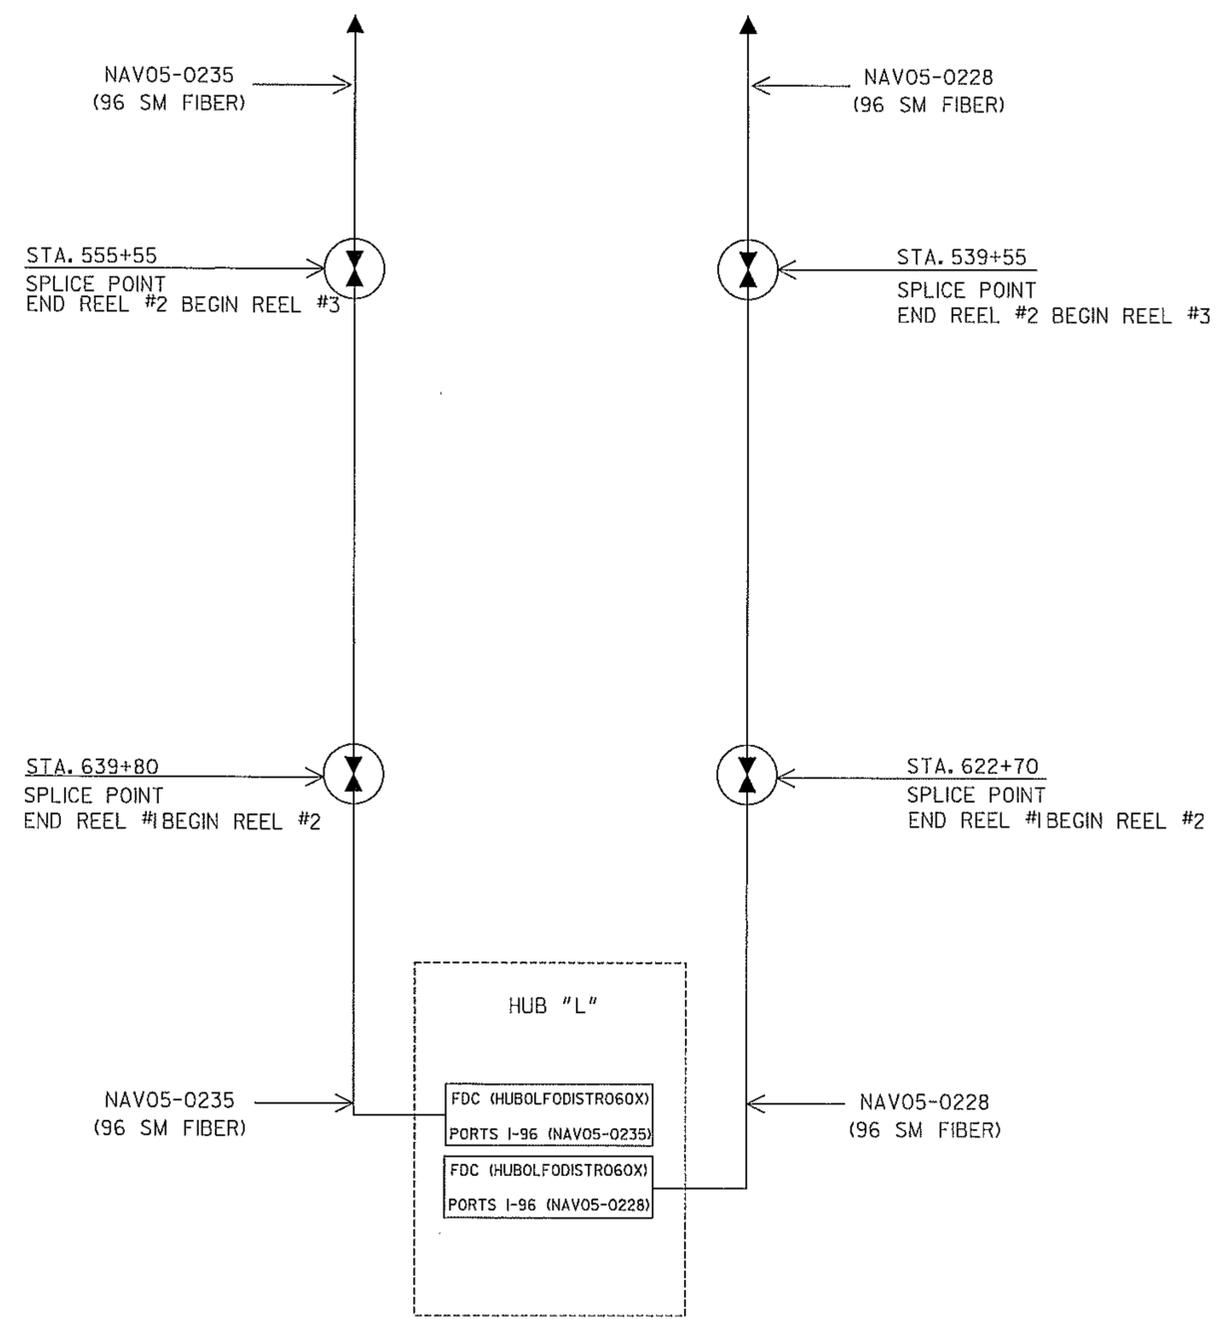

CONSTRUCTION



NOT TO SCALE



DATE	REVISIONS
3/30/07	

GEORGIA DEPARTMENT OF TRANSPORTATION  
 I-285 SOUTH ATMS  
 FIBER ROUTING SCHEMATIC  
 PROJECT - PI 713372  
 COUNTY - FULTON & CLAYTON  
 DATE - 3/23/07 SHEET 28-17

\$FILE\$  
\$DATE\$

11/13/2011 4:47 PM 14/11/11 30