



STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	CM-575-I(34)	66	113

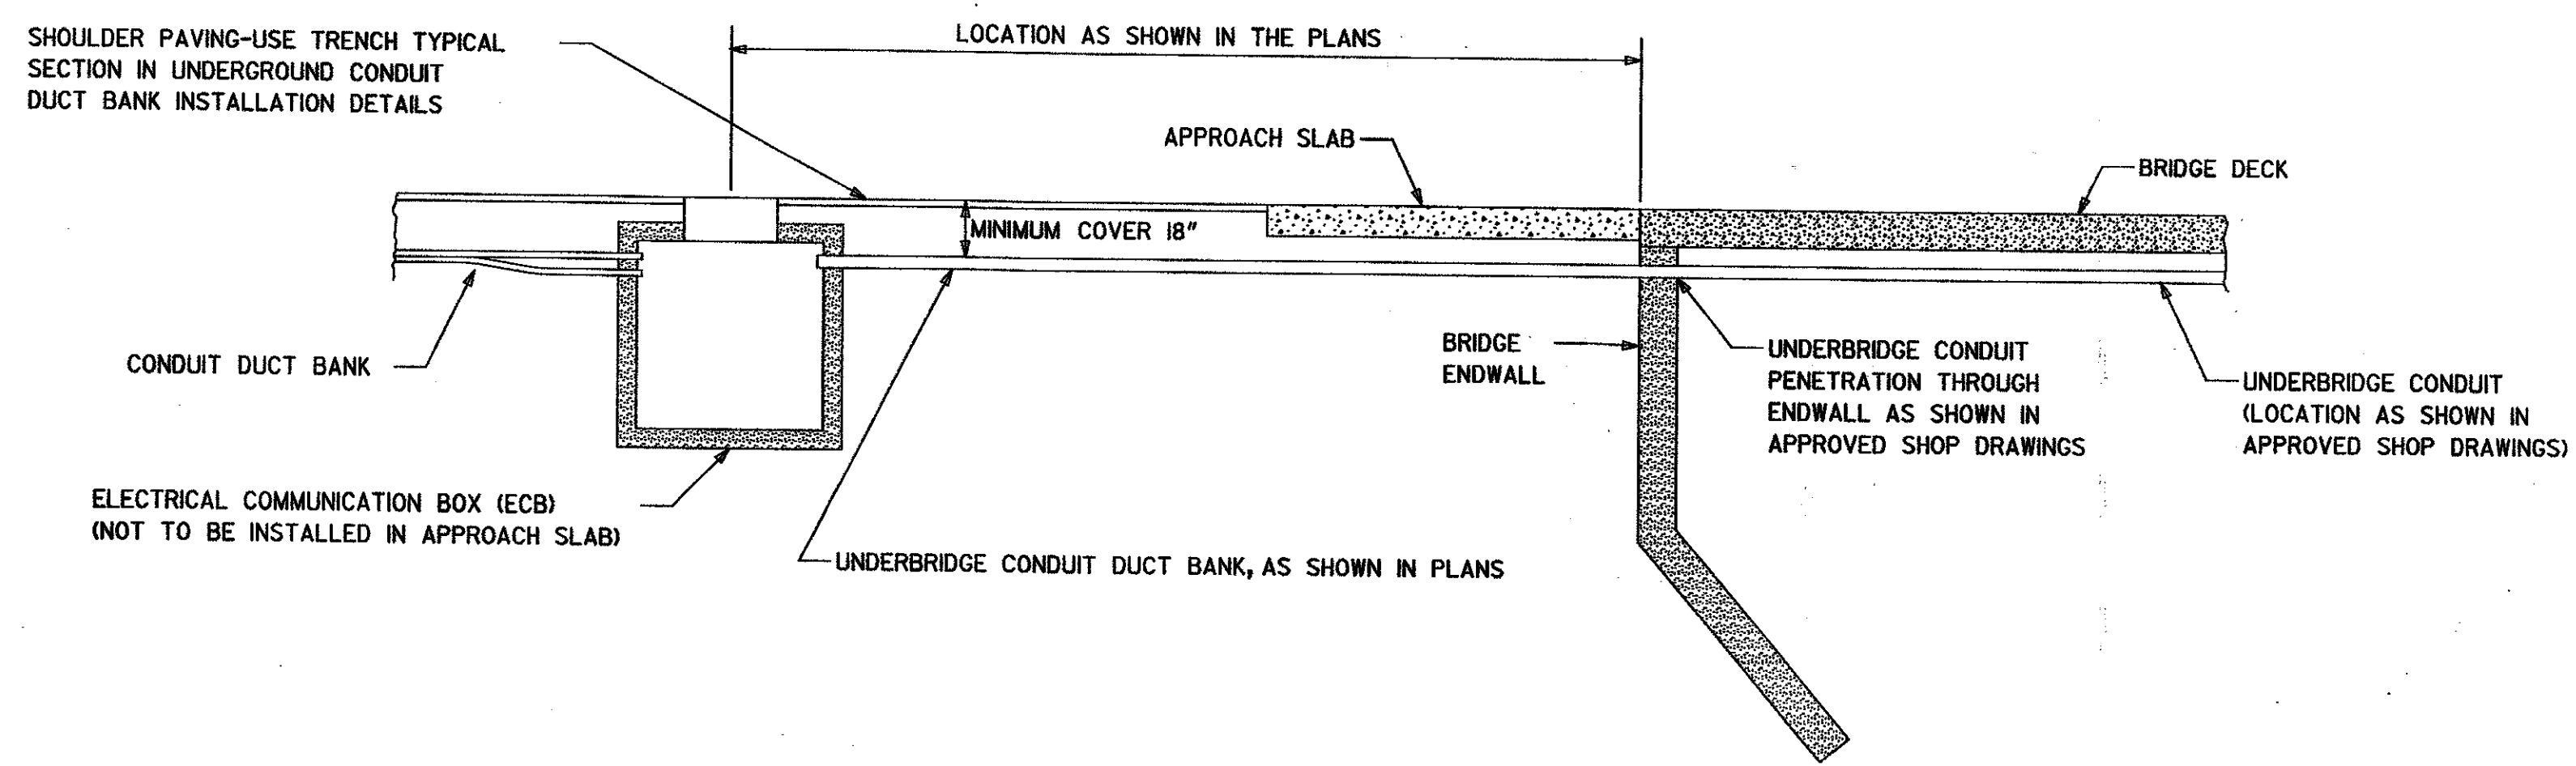

TYPICAL UNDERBRIDGE CONDUIT TERMINATION

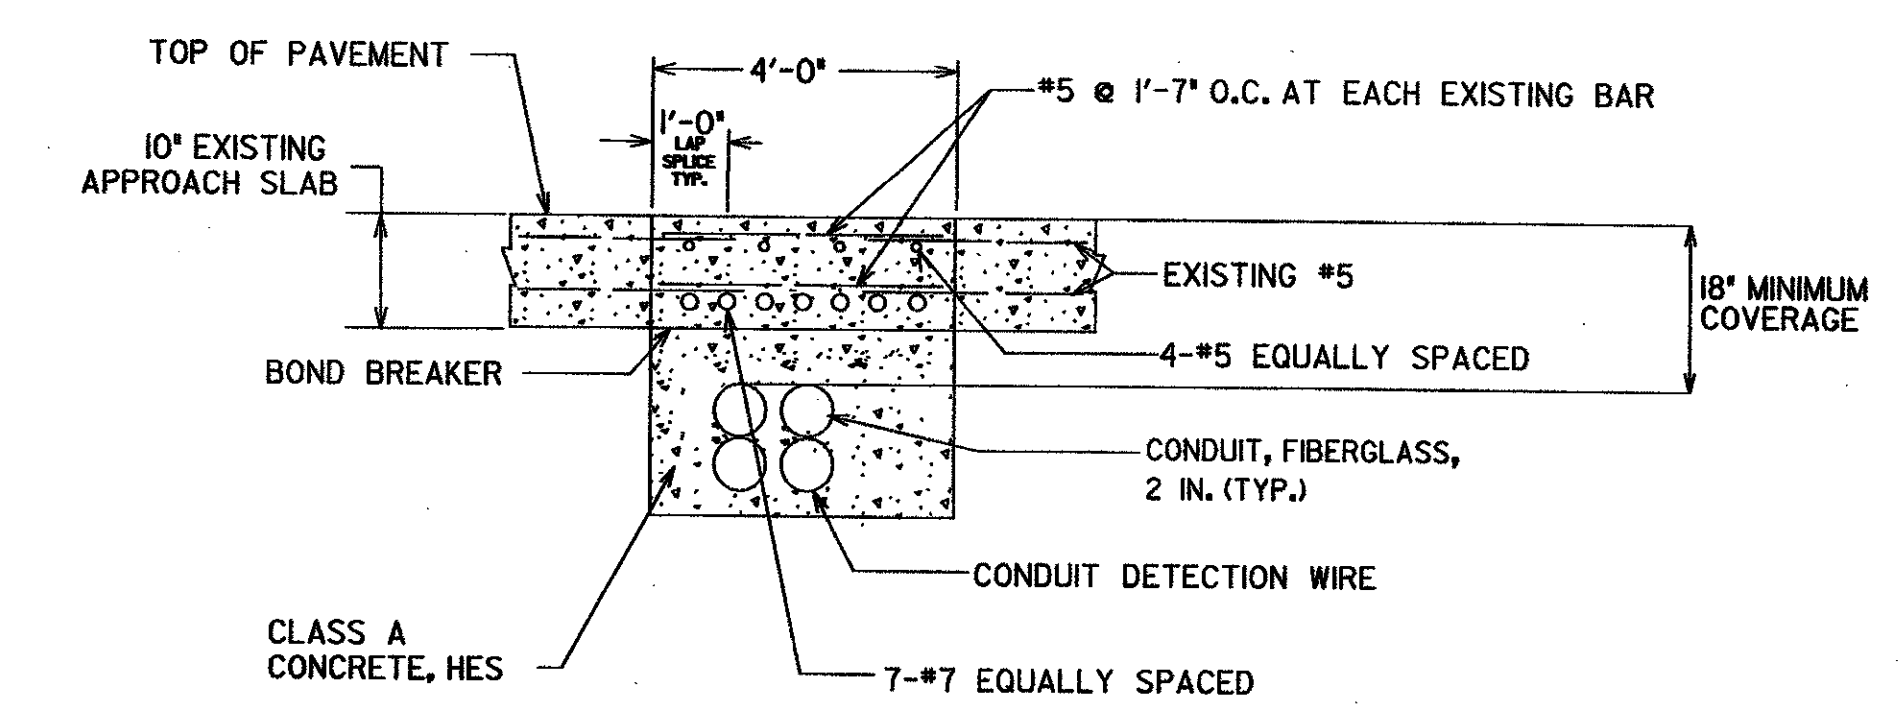


TYPICAL SECTION AT APPROACH SLAB

NOTE: #5 AND #7 BAR REINFORCEMENT SHALL BE IN ACCORDANCE WITH GA. STANDARD 9017P - REINFORCED CONCRETE APPROACH SLAB. APPROACH SLAB MATERIALS AND CONSTRUCTION SHALL BE IN ACCORDANCE WITH SECTION 433 OF THE GDOT SPECIFICATIONS.

COST OF SAW CUTTING, TRENCHING, BAR REPLACEMENT, CONCRETE, CONDUIT DETECTION WIRE, AND RESTORATION SHALL BE INCLUDED IN THE OVERALL BID PRICE OF CONDUIT OR CONDUIT DUCT BANK.

CONTRACTOR SHALL MAINTAIN EXISTING EXPANSION JOINT BETWEEN APPROACH SLAB AND BRIDGE ABUTMENT. IF DAMAGED, COST OF REPLACEMENT SHALL BE BORNE BY CONTRACTOR. JOINT REPLACEMENT, IF REQUIRED SHALL MATCH EXISTING JOINT MATERIAL, AND SHALL BE APPROVED BY THE ENGINEER.

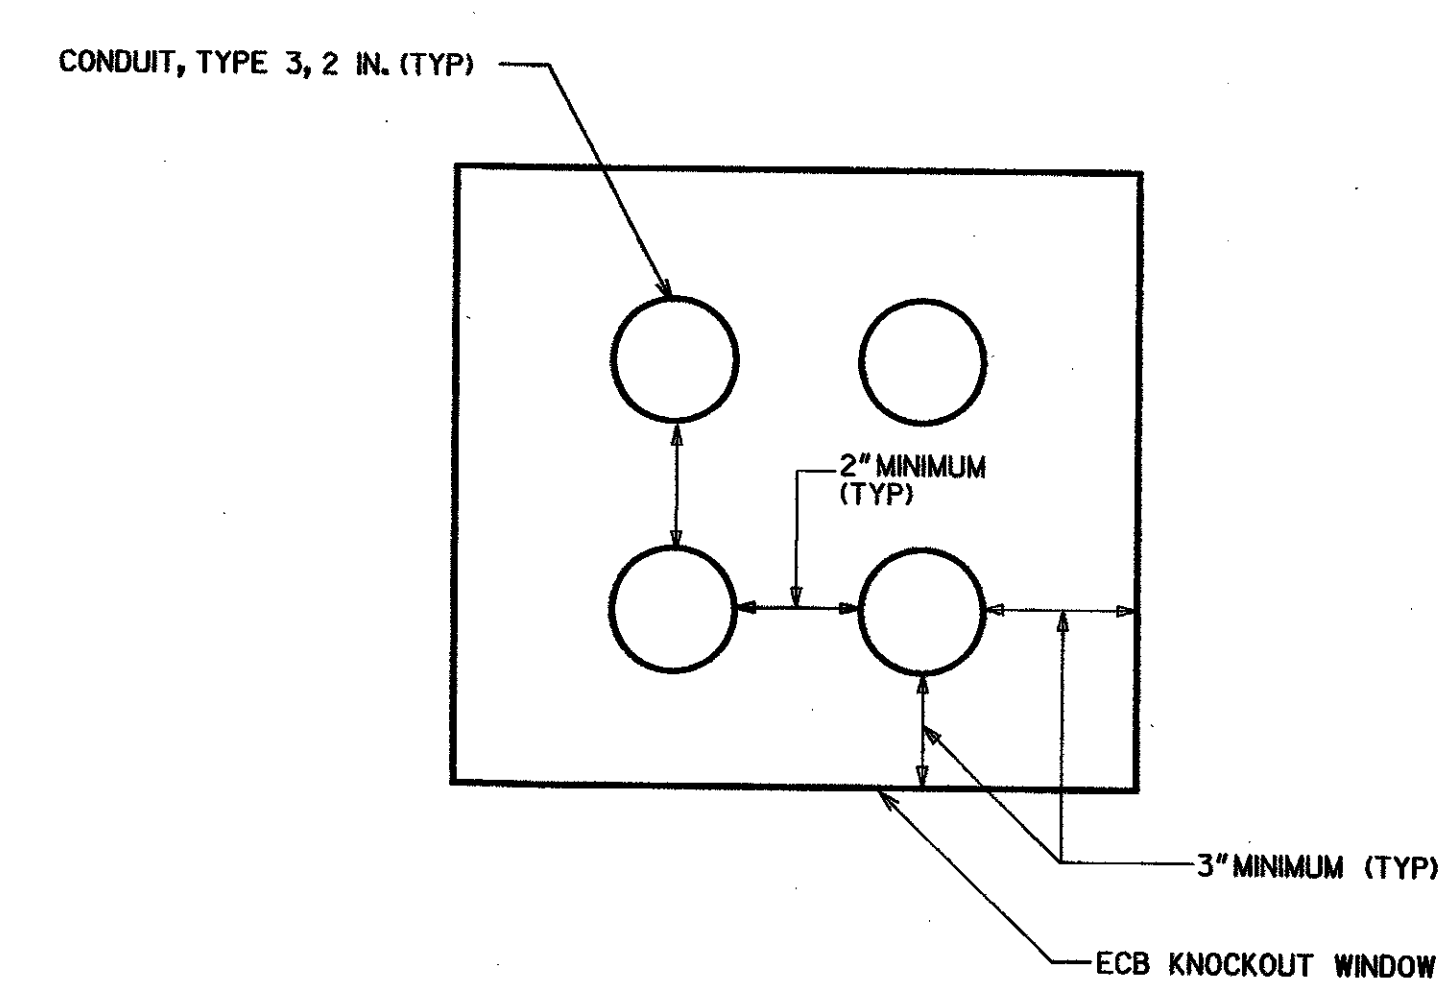


UNDERBRIDGE CONDUIT DUCT BANK-ECB TERMINATION



GRESHAM
SMITH AND
PARTNERS

NOT TO SCALE

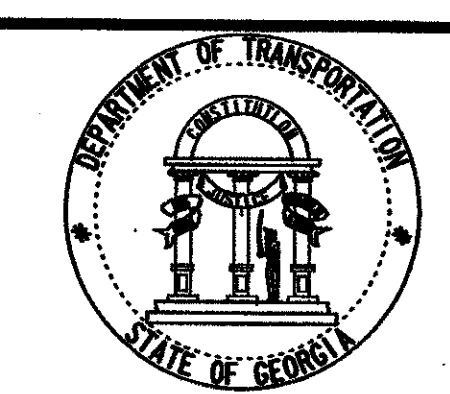

OFFICE OF TRAFFIC SAFETY & DESIGN

DATE	REVISIONS

I-575 ATMS
UNDER BRIDGE CONDUIT
DUCT BANK INSTALLATION
PROJECT - CM-575-I(34)
COUNTY - COBB/CHEROKEE
DATE - 05/02/06 SHEET 40-2