
STATE PROJECT NUMBER SHEET TOTAL SHEETS


GA. CM-056-1 (56) 59 157

REVISED AND REDRAWN: 1-07-05

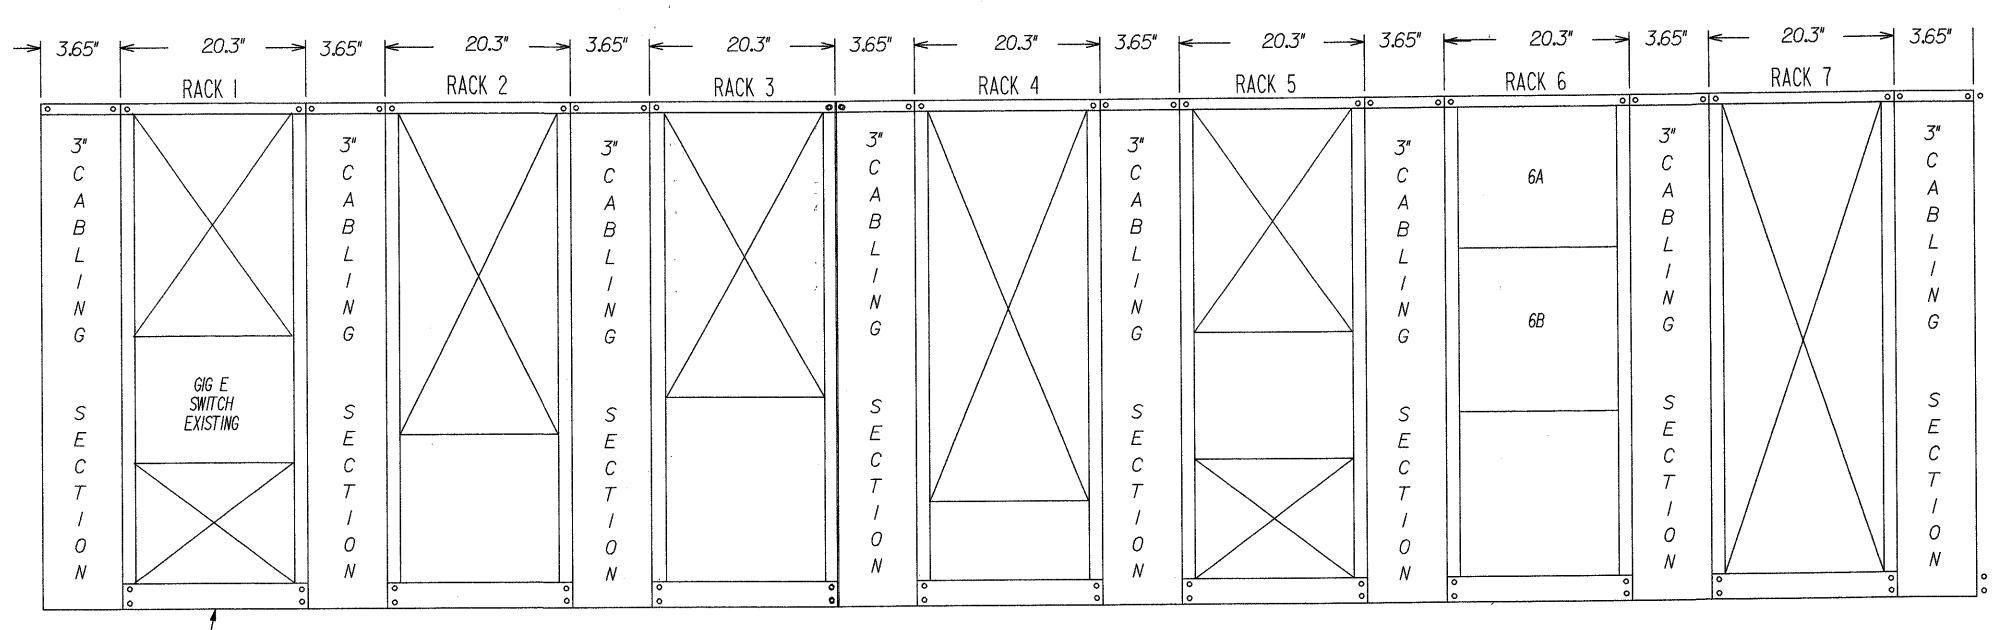

EQUIPMENT RACKS 1-7 (FRONT ELEVATION)

- INCLUDE 19"W x 7' H EQUIPMENT RACKS PER PLANS WITH A UNIVERSAL HOLE PATTERN PUNCHED AND TAPPED BETWEEN EACH RACK AND ON THE ENDS OF THE BAY USE A VERTICAL CABLE MANAGER FOR ROUTING CABLES ALONG THE FRONT AND THE REAR FACE OF THE RACK. INCLUDE (I) VERTICAL POWER STRIP ATTACHED TO THE REAR FLANGE OF EACH RACK.

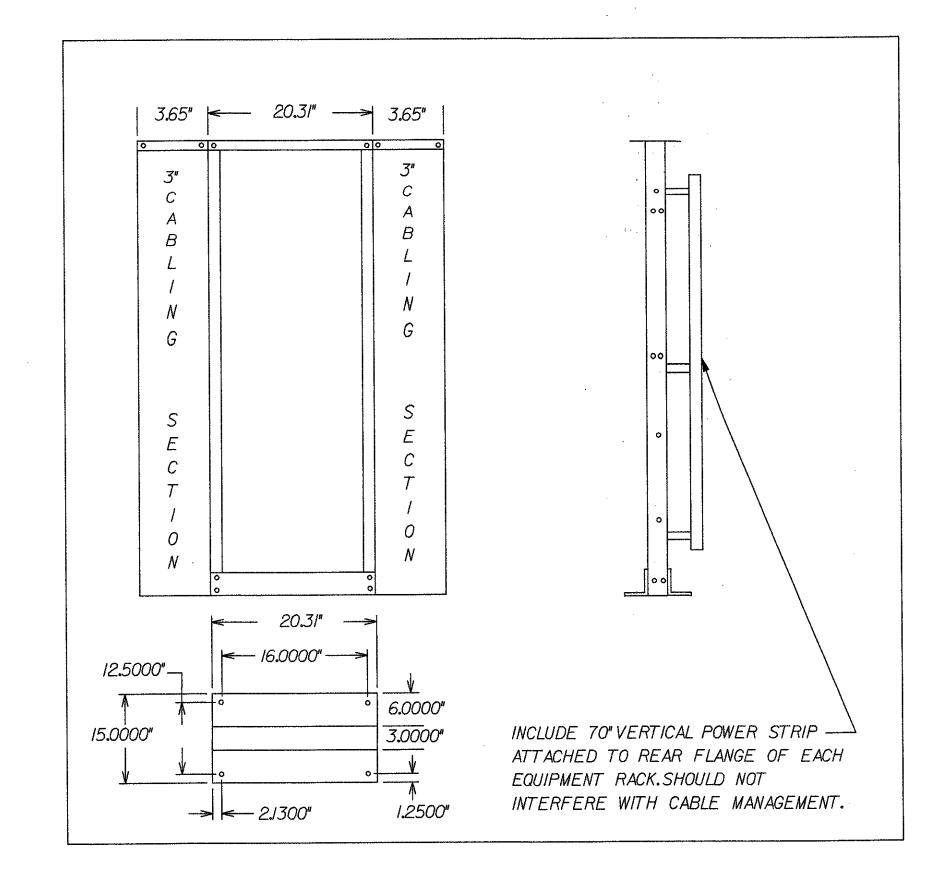

LEGEND:

6A = FDC #IPORTS I-144(S093) 6B = FDC #2 PORTS I-144(S094)

NOTES:

- I. RACKS ITHROUGH 7 ARE EXISTING.
- 2. CONTRACTOR SHALL INSTALL EQUIPMENT STARTING AT THE TOP OF RACK (UNLESS SHOWN OTHERWISE) AND CONTINUE TOWARD THE BOTTOM OF THE RACK LEAVING ANY SPACE AT THE BOTTOM.

SUPERVISED BY						SUBMITTED BY DATE		
CHECKED BY			LAST DRAWN					HUB "B" EQUIPMENT
DESIGNED BY			FIRST Drawn			OF TRANSPORTATION		S.R 400 FROM I-8
	NAME	DATE		NAME	DATE	GEORGIA D	EPARTMENT	ATMS DESIG