



STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	BHNLB-9073-00(016) BRNLB-9073-00(018)	121	444


\*\* ADJUST SLOPE AS NEEDED TO TIE IN TO EXISTING PARKING DECK, 8% MAX.

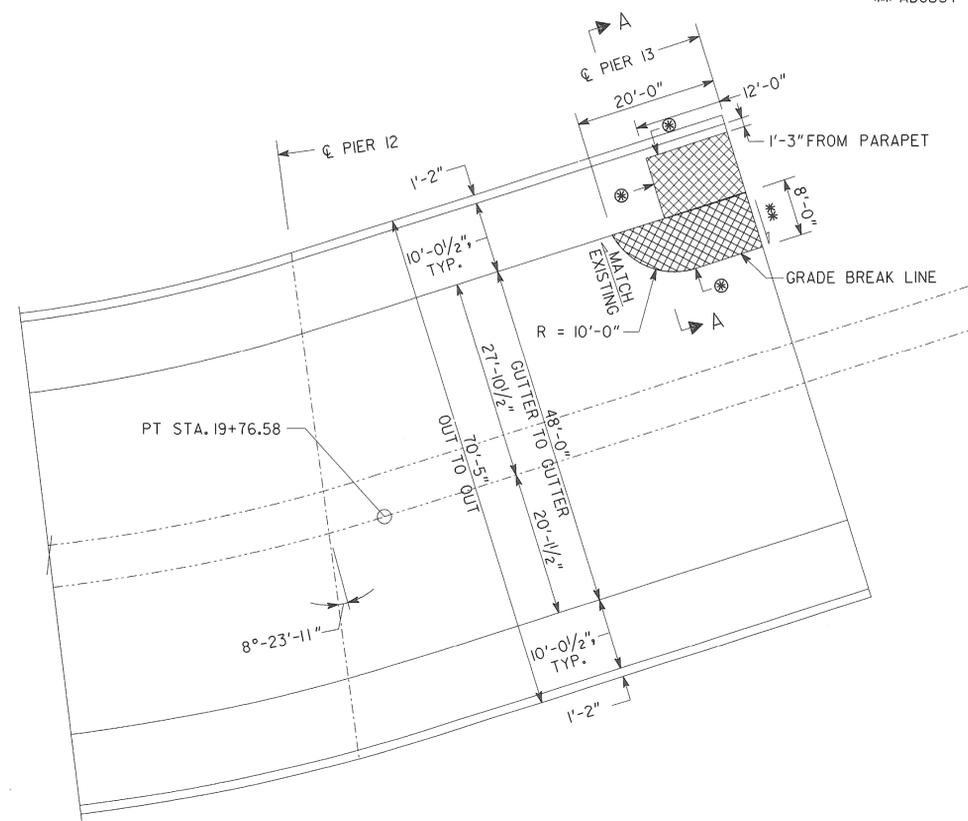

TO MARIETTA ST.

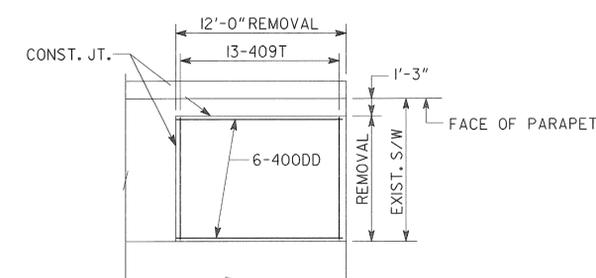

SIDEWALK DETAIL

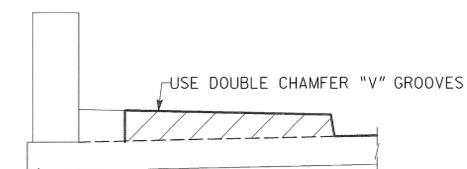


CONST. JOINT DETAIL AT SIDEWALK

SIDEWALK DEMOLITION/RECONSTRUCTION NOTES:

1. REMOVE EXISTING SIDEWALK AS SHOWN IN PLAN AND SIDEWALK DETAIL.
2. REMOVE DUST AND LOOSE DEBRIS.
3. PLACE NEW REINFORCEMENT AND RE-POUR SIDEWALK AS SHOWN AND PER ADA RAMP DETAILS. SEE ROADWAY PLANS.
4. ⊗ REQUIRED VERTICAL 1" SAW CUT.

NOTES:

1. DECK REMOVAL SHALL BE INCLUDED IN THE PRICE BID FOR PAY ITEM 540-1202, REMOVAL OF PARTS OF EXISTING BRIDGE.
2. EXISTING DECK REINFORCEMENT TO REMAIN UNLESS NOTED IN THE PLANS.
3. ALL DIMENSIONS ARE PER FIELD MEASUREMENTS AND/OR EXISTING PLANS.
4. THE CONTRACTOR SHALL CONTACT THE ENGINEER IF THE EXISTING/AS-BUILT REINFORCEMENT ARRANGEMENT DIFFERS FROM THE ARRANGEMENT SHOWN ON THESE PLANS AND/OR THE EXISTING BRIDGE PLANS.
5. ⊗ REQUIRED VERTICAL 1" SAW CUT. CARE SHALL BE EXERCISED SO THAT THE EXISTING REINFORCING STEEL IS NOT DAMAGED. ANY EXISTING REINFORCEMENT DAMAGED DURING REMOVAL SHALL BE REPLACED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE DEPARTMENT.
6. REMOVE CONCRETE TO 1/2" MIN. BELOW TOP MAT OF EXISTING REINFORCEMENT.
7. CLEAN ANY CORRODED REINFORCING BY SANDBLASTING.
8. REMOVE DUST AND LOOSE DEBRIS.
9. APPLY TYPE II EPOXY RESIN ADHESIVE TO CONCRETE SURFACE.
10. POUR BACK WITH CLASS AA CONCRETE WHILE EPOXY IS STILL TACKY.

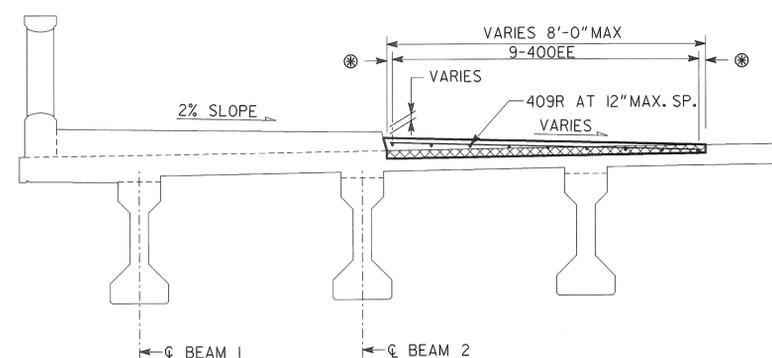

SECTION A-A THRU SLAB  
LOOKING UPSTATION

SUPERSTRUCTURE QUANTITIES	
ITEM	SPAN I3
LUMP - CY SUPERSTR. CONCRETE, CLASS "AA"	7.9
LUMP - LB SUPERSTR. REINF. STEEL	324

⊗ - DENOTES REMOVAL AREA

BRIDGE NO. 1

**H&L** Heath & Lineback Engineers  
INCORPORATED  
2390 CANTON ROAD, BUILDING 200  
MARIETTA, GEORGIA 30066-5393  
(770)424-1668

GEORGIA  
DEPARTMENT OF TRANSPORTATION  
ENGINEERING DIVISION-OFFICE OF BRIDGES AND STRUCTURES

SPAN I3 REMOVAL/RECONSTRUCTION DETAILS  
SPRING STREET VIADUCT OVER  
CSX TRANSPORTATION

FULTON COUNTY BHNLB-9073-00(016)  
BRNLB-9073-00(018)

NO SCALE JULY 2013

DRAWING NO.  
35 - 04B  
BRIDGE SHEET  
4B OF 79

DATE	
REVISIONS	
BY	

DESIGNED: KAK	CHECKED: RLF/GBL	REVIEWED: WMD/DLC
DRAWN: JRL	DESIGN GROUP: SWW	APPROVED: BFR

1 INCH WHEN PRINTED FULL SIZE

JULY 2013 04B BRIDGE 1 04BSS1.SDLDGN