




STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	HPP-9014(25)	91	140
REVISION DATES			

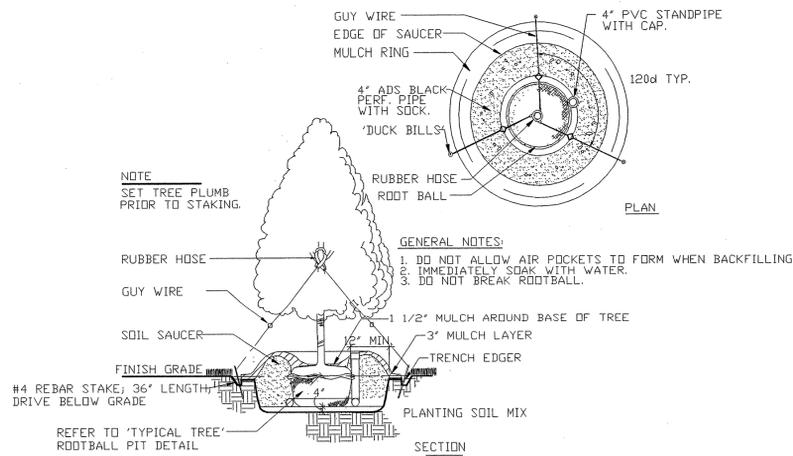


8 EVERGREEN TREE STAKING DETAIL
N.T.S.

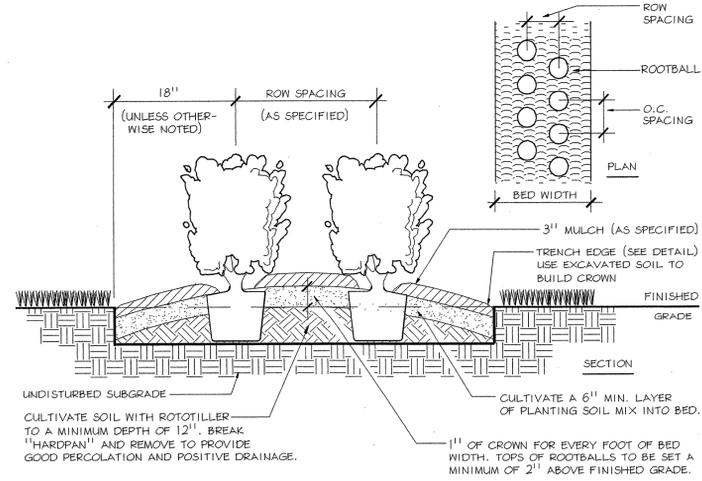


5 HEDGE PLANTING DOUBLE ROW
N.T.S.

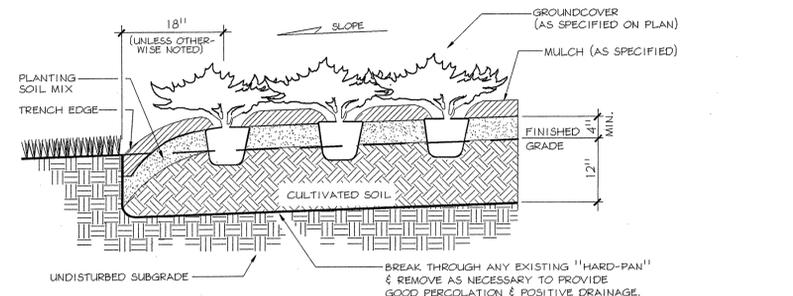


7 GROUNDCOVER PLANTING
N.T.S.

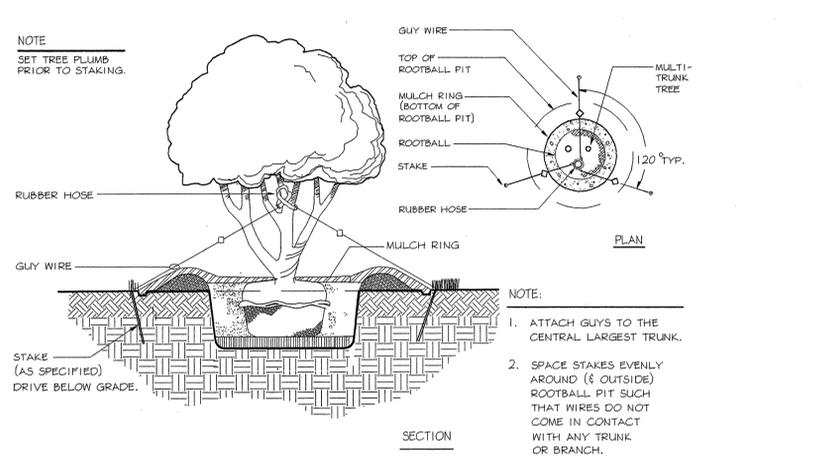

4 MULTI-TRUNK TREE STAKING DETAIL
N.T.S.

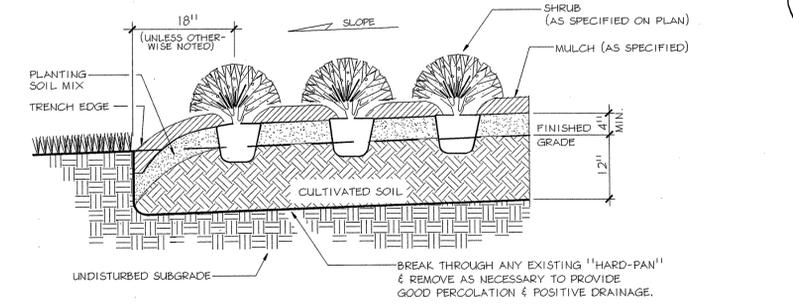

6 SHRUB DETAIL
N.T.S.

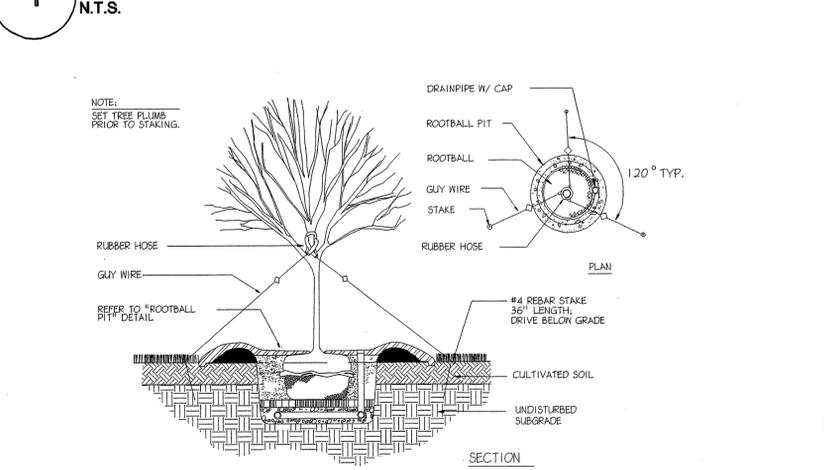

3 TREE STAKING AND GUYING DETAIL
N.T.S.

1. LANDSCAPE CONTRACTOR SHALL SUPPLY ALL PLANTING SOIL. PLANTING SOIL SHALL BE MIXED & STORED ON SITE.
2. LANDSCAPE CONTRACTOR SHALL FURNISH (FROM HIS SOURCE) A GOOD, CLEAN, DARK, LOAMY TOPSOIL. TOPSOIL MUST BE APPROVED BY THE LANDSCAPE ARCHITECT.
3. THE PLANTING SOIL MIX MUST BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO ANY BACKFILLING.
4. THE PLANTING SOIL MIX SHALL CONSIST OF THE FOLLOWING:
FOR TREES, SHRUBS & GROUNDCOVERS
50% TOPSOIL
50% ORGANIC SOIL ADDITIVES PER SECTION 893 OF GEORGIA DOT STD. SPECS

2 PLANTING SOIL MIX NOTES
N.T.S.

1. ALL PLANTS MUST BE HEALTHY, VIGOROUS MATERIAL; FREE OF PESTS & DISEASES.
2. ALL PLANTS MUST BE CONTAINER-GROWN OR BALLED & BURLAPPED (B&B) AS INDICATED IN THE PLANT LIST.
3. ALL TREES MUST BE STRAIGHT TRUNKED, FULL HEADED & MEET ALL REQUIREMENTS SPECIFIED.
4. ALL PLANTS ARE SUBJECT TO THE APPROVAL OF THE LANDSCAPE ARCHITECT & THE OWNER BEFORE, DURING & AFTER INSTALLATION.
5. ALL TREES MUST BE GUYED OR STAKED AS SHOWN IN THE DETAILS.
6. ALL PLANTS & PLANTING AREAS MUST BE COMPLETELY MULCHED AS SPECIFIED.
7. PRIOR TO CONSTRUCTION, THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE LOCATING ALL UNDERGROUND UTILITIES & SHALL AVOID DAMAGE TO ALL UTILITIES DURING THE COURSE OF THE WORK. THE LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR REPAIRING ANY & ALL DAMAGE TO UTILITIES, STRUCTURES, SITE APPURTENANCES, ETC. WHICH OCCURS AS A RESULT OF THE LANDSCAPE CONSTRUCTION.
8. THE LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL QUANTITIES SHOWN ON THESE PLANS BEFORE PRICING THE WORK.
9. THE LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR FULLY MAINTAINING ALL PLANTING (INCLUDING, BUT NOT LIMITED TO: WATERING, SPRAYING, MULCHING, FERTILIZING, ETC.) OF PLANTING AREAS & LAWNS UNTIL THE WORK IS ACCEPTED IN TOTAL BY THE LANDSCAPE ARCHITECT & THE OWNER.
10. THE LANDSCAPE CONTRACTOR SHALL COMPLETELY GUARANTEE ALL PLANT MATERIAL FOR A PERIOD OF ONE (1) YEAR BEGINNING AT THE DATE OF FINAL ACCEPTANCE. THE LANDSCAPE CONTRACTOR SHALL PROMPTLY MAKE ALL REPLACEMENTS BEFORE OR AT THE END OF THE GUARANTEE PERIOD (AS PER DIRECTION OF THE OWNER).
11. THE OWNER AGREES TO PERFORM ALL LANDSCAPE MAINTENANCE (INCLUDING WATERING) THROUGHOUT THE ONE YEAR GUARANTEE PERIOD UNLESS OTHERWISE DETERMINED.
12. THE LANDSCAPE ARCHITECT WILL APPROVE THE STAKED LOCATION OF ALL PLANT MATERIAL PRIOR TO INSTALLATION.
13. AFTER BEING DUG AT THE NURSERY SOURCE, ALL TREES IN LEAF SHALL BE ACCLIMATED FOR TWO (2) WEEKS UNDER A MIST SYSTEM PRIOR TO INSTALLATION.
14. ANY PLANT MATERIAL WHICH DIES, TURNS BROWN OR DEFOLIATES (PRIOR TO TOTAL ACCEPTANCE OF THE WORK) SHALL BE PROMPTLY REMOVED FROM THE SITE & REPLACED WITH MATERIAL OF THE SAME SPECIES, QUANTITY, SIZE AND MEETING ALL PLANT LIST SPECIFICATIONS.
15. STANDARDS SET FORTH IN 'AMERICAN STANDARDS FOR NURSERY STOCK' REPRESENT GUIDELINE SPECIFICATIONS ONLY AND CONSTITUTE MINIMUM QUALITY REQUIREMENTS FOR PLANT MATERIAL.

1 GENERAL PLANTING NOTES
N.T.S.



FINAL

PROPERTY LINE	---	BEGIN LIMIT OF ACCESS	BLA
REQUIRED R/W LINE	REQ'D R/W	END LIMIT OF ACCESS	ELA
TEMPORARY EASEMENT	////	EXIST. LIMIT OF ACCESS	---o---o---
		EXIST. R/W AND LIMIT OF ACCESS	--- --- ---
		EXISTING R/W LINE	---

NOT TO SCALE

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE OF URBAN DESIGN

RA Roy Ashley & Associates, Inc.
Landscape Architects / Land Planners
375 Northside Parkway
800 Northcross, Suite 102
Atlanta, Georgia 30309
Phone (404) 252-0200
Fax (404) 252-0204

CANDLER ROAD
ARTERIAL ENHANCEMENT

LANDSCAPE DETAILS
Candler Road/Glenwood Road

DRAWING NO.
29-19

DATE	REVISIONS	DATE	REVISIONS