SUMMARY OF QUANTITIES
HURRICANE CROSSOVERS

STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	NHS-M001-00(269)	6	42

REV. - 10-31-2001

SURFACING QUANTITIES

ITEMS ALTERNATE "A" (ASPHALT BASE)	UNIT	NORMAL	TOTAL
RECYCLED ASPH. CONC. 12.5 mm SUPERPAVE, GP. 11 ONLY INCL.			
BITUM MAT'L. & H. LIME	TON	712	712
RECYCLED ASPH. CONC. 19 mm SUPERPAVE, GP. 1 OR 11			
INCL. BITUM MAT'L. & H. LIME	TON	1424	1424
RECYCLED ASPH. CONC. 25 mm SUPERPAVE, GP. 1 OR 11	TON	4746	4746
INCL. BITUM MAT'L. & H. LIME			
BITUM. TACK COAT	GAL	690	690

GRADING COMPLETE

LUMP SUM

TRAFFIC CONTROL

LUMP SUM

PVMT. REINF. FABRIC STRIPS, TP. 2.

2736 LIN. FT.

TEMPORARY GRASSING

120 POUNDS

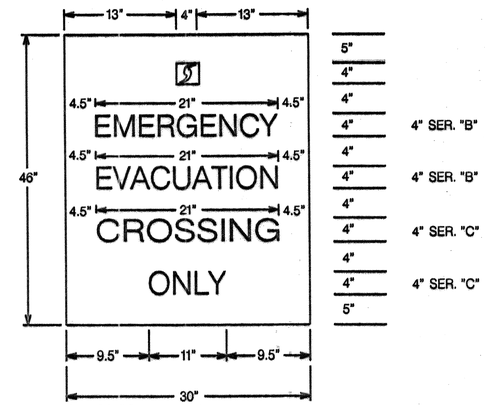

GA-SPEC.-14-1(30)
2 EACH REQD.

TEMPORARY EROSION CONTROL ITEMS

ITEM	UNIT	TOTAL
CONST. & REMOVE TEMP PIPE SLOPE DRAIN	LIN FT	400
CONST. & REMOVE BALED STRAW EROS. CHECK	LIN FT	300
TEMPORARY SILT FENCE TP. "A"	LIN FT	16000
TEMPORARY SILT FENCE TP. "C"	LIN FT	200
TEMPORARY MULCH	TONS	10

MAINTENANCE OF EROSION CONTROL ITEMS

ITEM	UNIT	TOTAL
MAINT. OF TEMPORARY SILT FENCE TP. "A"	LIN FT	8000
MAINT. OF TEMPORARY SILT FENCE TP. "C"	LIN FT	100
MAINT. OF BALED STRAW EROSION CHECK	LIN FT	200

DRAINAGE SUMMARY OF QUANTITIES

DRAINAGE SUMMARY *

LOCATION	STR. NO.	STORM DRAIN PIPE H 1-10 18"			group 1 MEDIAN DITCH DROP INLET	group 1 MEDIAN DROP INLET add'l dp.	MEDIAN DROP INLET SPECIAL DESIGN	FOUND. BKFL. MATL. TP. 2
SITE #1 STA.		LIN. FT.			EACH	lin ft	EACH	CU. YDS.
58+52.57	A1						1	
68+32.14	A2 TO A3	24			2			4.0
76+12.10	A4						1	
76+12.10	A5						1	
SITE #2 STA.								
						0.90		
236+08.61	B1	8			1			
241+08.27	B2				1	1.79		
246+07.82	B3				1	0.94		
251+08.49	B4				1	0.51		
TOTALS		32			6	4.14	3	4.0

TRAFFIC STRIPE

DESCRIPTION	UNIT	QUANTITY PAINT	QUANTITY THERMOPLASTIC
5" SOLID WHITE	LIN FEET		4800
5" SOLID YELLOW	LIN FEET		4800

UNDERDRAIN PIPE INCL. DRAIN. AGGREGATE 6 IN.

AS REQ'D: 500 LIN. FT.

PERMANENT GRASSING

PERMANENT GRASSING LBS.	150			
AGRICULTURAL LIME TON	10			
FERTILIZER MIXED GRADE TON	3			
FERTILIZER NITRO. CONTENT LB.	236			

FLEXIBLE DELINEATORS TYPE 2A

788 EACH

ROAD CLOSURE DROP GATES

4 EACH

SUMMARY OF QUANTITIES - STANDARD SIGNS

STATION	INSTL. No.	CODE	SIGNS (TYPE III REFLECTIVE SHEETING) TYPE 1 (0.08) SIZE	QTY.	SQUARE FEET	TYPE 2 (0.10) SIZE	QTY.	SQUARE FEET	POSTS TYPE 2 (2.0 LB./LIN FT) LENGTH (FEET)	QTY.	TOTAL LENGTH	TYPE 3 (3.0 LB./LIN FT) LENGTH (FEET)	QTY.	TOTAL LENGTH	TYPE 4 (4.0 LB./LIN FT) LENGTH (FEET)	QTY.	TOTAL LENGTH
82+00		GA-SPEC.-14-1(30)				30 x 46	1	9.58				14	2	28			
250+34		GA-SPEC.-14-1(30)				30 x 46	1	9.58				14	2	28			
TOTAL								19.16						56			

11/2/01 7:21:22 AM \\GDOT-DSN1\GOPLOT\OCF\d5_8830_mylar.ocf brewerm E:\WIN32APP\DGN\CSLIP2EAST\52270SUM (2).orf D5-Jesup