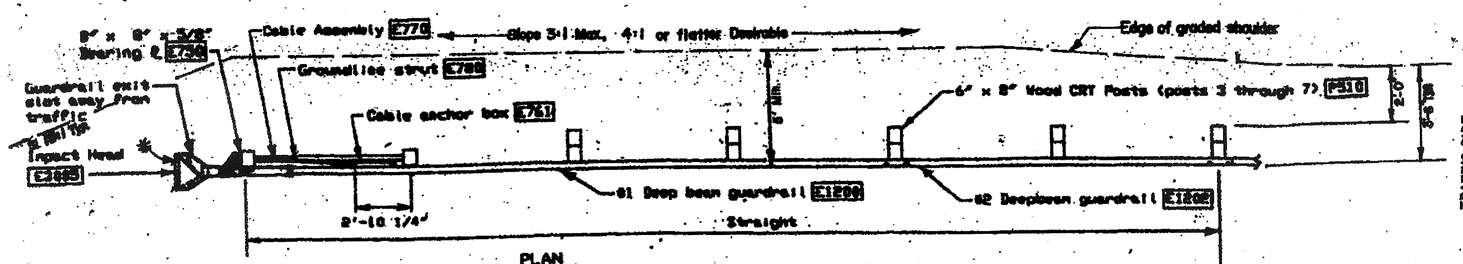

PLAN

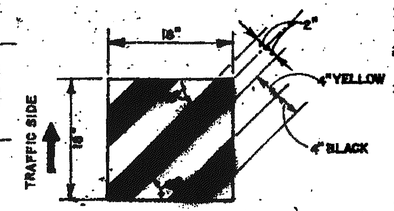

(Rotate 90° where approach traffic is on right side.)

NOSE STRIPING DETAIL

Black gloss enamel ink screen printed on pressure sensitive engineer grade reflective sheeting, Tp.1, Level 'A' (SECTION 913)

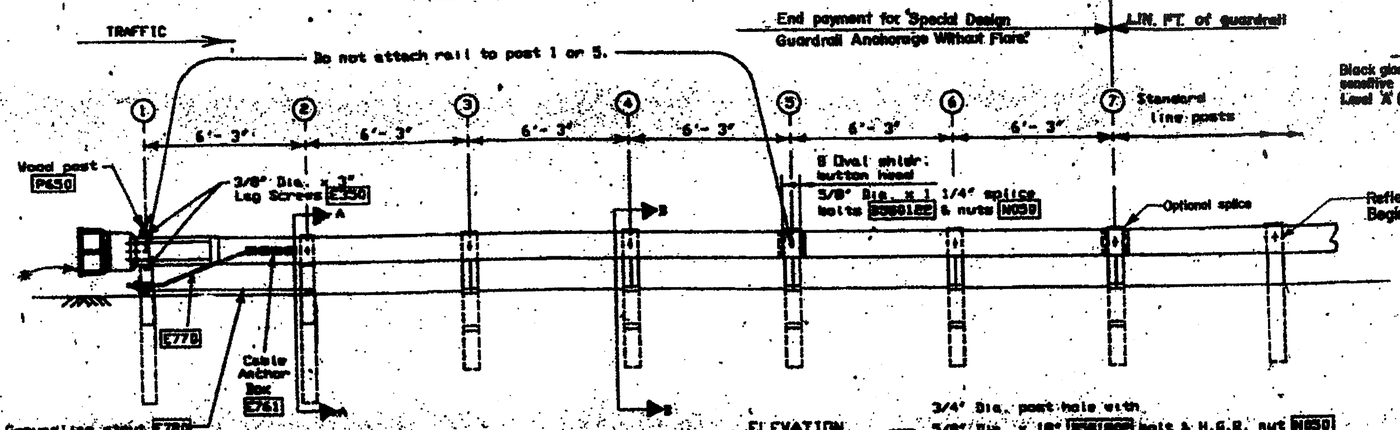

* SEE SEPARATE DETAILS FOR REQUIRED NOSE STRIPING.

ELEVATION

GENERAL NOTES

1. Wood posts are required with the Beam Eating Steel Terminal (BEST).
2. All bolts, nuts, cable assemblies, cable anchors, and bearing plates shall be galvanized.
3. When the Beam Eating Steel Terminal is selected as the end treatment for NGDF installation, the NGDF will be flared at a rate of 20:1 over the first 30 feet of the system, if needed, to prevent the BEST impact head from encroaching, as shown at bottom left. The flare may be discussed for elimination for specific installations if directed by the Engineer. A 20:1 flare rate will be used at curb sections where the curb face is aligned with the face of the guardrail. (See DETAIL 'A')
4. The steel tubes shall not protrude more than 4 inches above ground (measured along a 3 foot cord). Site grading may be necessary to meet this requirement.
5. The steel tubes may be driven with an approved driving head. They shall not be driven with the wood post in the tube. If the steel tubes are placed in drilled holes, the backfill material must be satisfactorily compacted to prevent tube settlement.
6. When rock excavation is encountered, a 12 inch diameter post hole, 28 inches deep, may be used if approved by the Engineer. Granular material will be placed in the bottom of the hole approximately 2 1/2 inches deep to provide drainage. The steel tube sleeves will be field cut to 28 inches in length, placed in the hole and backfilled with adequately compacted material excavated from the hole.
7. The breakaway cable assembly must be taut. A locking device (vice grips or channel lock pliers) should be used to prevent the cable from twisting when tightening the nuts.
8. The wood blockouts shall be "toe nailed" to the rectangular wood posts to prevent them from turning when the wood shrinks.
9. DETAIL 'A' Installation: the soil tubes and posts shall be installed at the proper ground elevation behind the curb. The posts will then require field drilling new holes to accommodate the rail to post connection bolt to maintain the proper height of the rail above the gutter pan. The excess post length above the rail will be removed if directed by the Engineer.

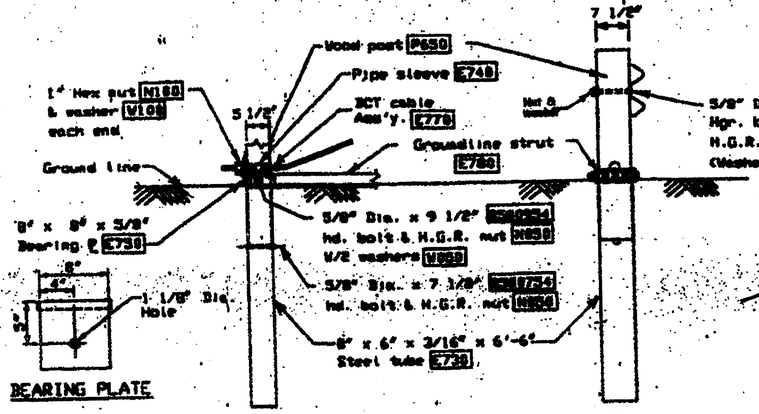

BEARING PLATE

PARTIAL VIEW AT POST #1

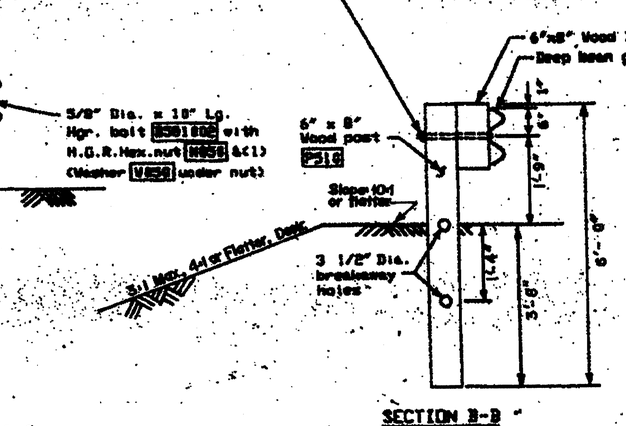

SECTION A-A
(at post #2)

SECTION B-B

(Typ. at posts 3 thru 7)
Posts 3 thru 7 only are CRT posts.

BEST Bill of Materials		
Code #	QTY	DESCRIPTION
E1200	1	01 Deep Beam Guardrail (25'-6 1/2")(12 Ga.)
E1202	1	02 Deep Beam Guardrail (15'-6 1/2")(12 Ga.)
E750	2	Steel Tube - 6"x 6"x 6'-6"x 3/16"
P650	8	Wood Posts - 5 1/2 "x 7 1/2 "x 45"
P810	5	6" x 8" x 8'-0" Wood CRT Posts
P675	5	6" x 8" x 14" Wood Blockouts
E749	1	Pipe Sleeve - 2" Std. Pipe x 5 1/2"
E750	1	Bearing Plate - 8" x 8" x 5/8"
E761	1	Cable Anchor Box
E770	1	Cable Assembly
E780	1	Groundline Strut
E2000	1	BEST Impact Head
HARDWARE		
[illegible]	2	5/8"x 7 1/2" Hex Hd. Bolt (Bottom of tubes)
[illegible]	2	5/8"x 9 1/2" Hex Hd. Bolt (Top of tubes)
W059	18	5/8" Flat Washer (2 ea. at Tubes + 6 Posts)
[illegible]	1	5/8"x 18" H.G.R. Post Bolt (Post 2)
[illegible]	5	5/8"x 18" H.G.R. Post Bolt (Posts 3 through 7)
[illegible]	16	5/8"x 1 1/4" H.G.R. Splice Bolt
N059	26	5/8" H.G.R. Nut (Splice-16, Tubes-4, (B-6)
C750	2	3/8"x 3" Lag Screw
N160	2	1" Hex Nut (Anchor Cable)
W160	2	1" Washer (Anchor Cable)

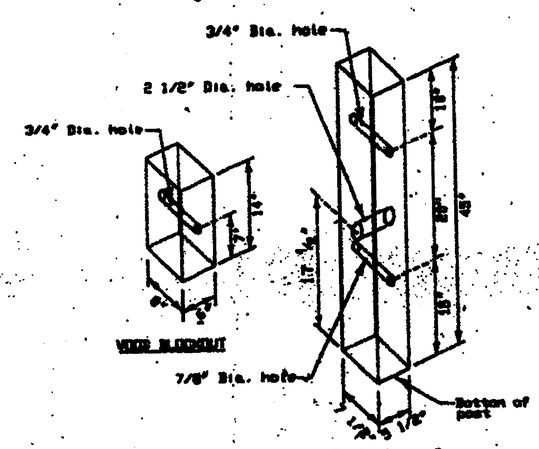

Posts 1 and 2

All measurements should be taken from bottom of posts.

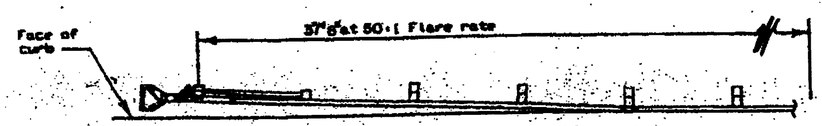

DETAIL A
Taper at curbed locations.

NOTE:
Tapered installations are to be used only where specified, typically to prevent protrusion over curb face or to prevent encroachment within the Sky Line offset distance.

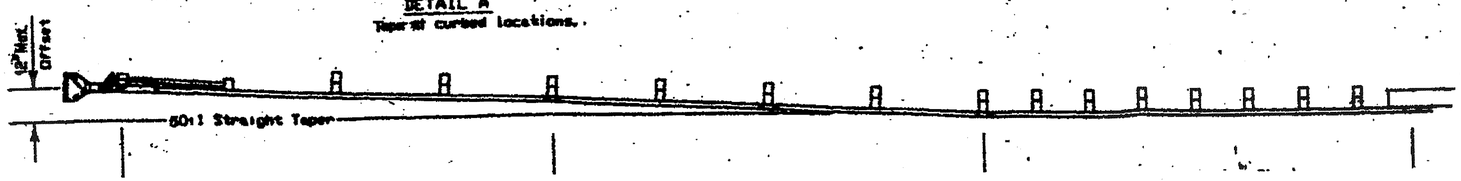

NOTE:
Special Design Guardrail Anchorage Without Flare, as shown, shall be in accordance with "B-E-S-T" Systems, meeting NCHRP 350 requirements and as approved by the FHWA. The Contractor will be responsible for obtaining units from a licensed distributor.
See separate details for ALTERNATE A.

SPECIAL DESIGN GUARDRAIL ANCHORAGE

WITHOUT FLARE (ALTERNATE B)