

NOTES

WELDS-ALL WELDS SHOWN SHALL BE PROPERLY SIZED TO RESIST ANY LOADS APPLIED THROUGH THE BEARINGS AS PER THE AASHTO SPECIFICATIONS.

EXISTING BEARING COMPONENTS-THE CONTRACTOR AND FIELD ENGINEER SHALL INSPECT ALL EXISTING BEARINGS TO IDENTIFY ANY DEFECTIVE BEARING COMPONENTS. IF ANY DEFECTIVE BEARING COMPONENTS ARE FOUND, THEY SHALL BE REPLACED. COMPENSATION FOR ANY REQUIRED BEARING COMPONENT REPLACEMENTS SHALL BE MADE BY MEANS OF A SUPPLEMENTAL AGREEMENT. EXISTING BEARINGS SHALL BE CLEANED AND PAINTED AS PER SECTION 535 OF THE GDOT STANDARD SPECIFICATIONS.



ANCHOR BOLTS-NEW ANCHOR BOLTS SHALL BE SWEDGED WITH SQUARE PLATE WASHERS AND HEX NUTS AND SHALL BE ASTM-A276 TYPE 304 STAINLESS STEEL. SECURE ANCHOR BOLTS IN HOLES WITH AN APPROVED TYPE VIII EPOXY RESIN ADHESIVE.

DRILLED HOLES- REQUIRED HOLES FOR NEW ANCHOR BOLTS SHALL BE 3" DIA. BY 12" DEEP. USE AN IMPACT DRILL FOR DRILLING HOLES IN CONCRETE. DO NOT DAMAGE THE EXISTING CAP MAIN REINFORCING STEEL.

NEW STEEL-ALL NEW BEARING ASSEMBLY COMPONENTS SHALL BE A709 GRADE 36 STEEL UNLESS OTHERWISE NOTED AND SHALL BE CLEANED AND PAINTED IN ACCORDANCE WITH SECTION 535 OF THE GDOT STANDARD SPECIFICATIONS.

ELASTOMERIC PADS-PROVIDE ELASTOMERIC PADS BETWEEN TOP OF CAP AND BEARING ASSEMBLY IN LIEU OF RED PRIMER-SATURATED DUCK AS SPECIFIED IN SECTION 501.3.05 ELASTOMERIC PADS SHALL BE MADE OF 60 DUROMETER HARDNESS NEOPRENE WITH TWO 1/16" DIAMETER HOLES FOR ANCHOR BOLTS.

COST OF MATERIALS-COST OF CLEANING AND PAINTING BEARINGS, FURNISHING AND INSTALLING PLATES, PEDESTALS, ANCHOR BOLTS, ELASTOMERIC PADS AND ANY OTHER MATERIALS NECESSARY TO COMPLETE THE WORK SHALL BE INCLUDED IN THE PRICE BID FOR ITEM 518-RAISE EXISTING BRIDGE.

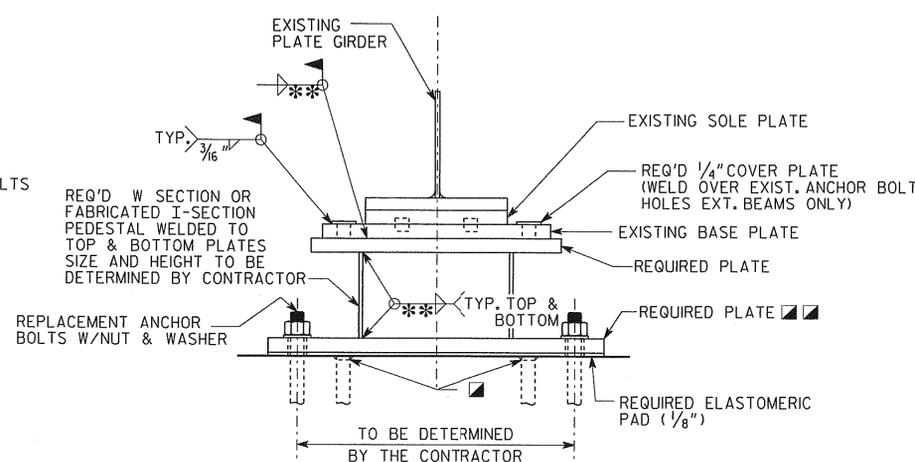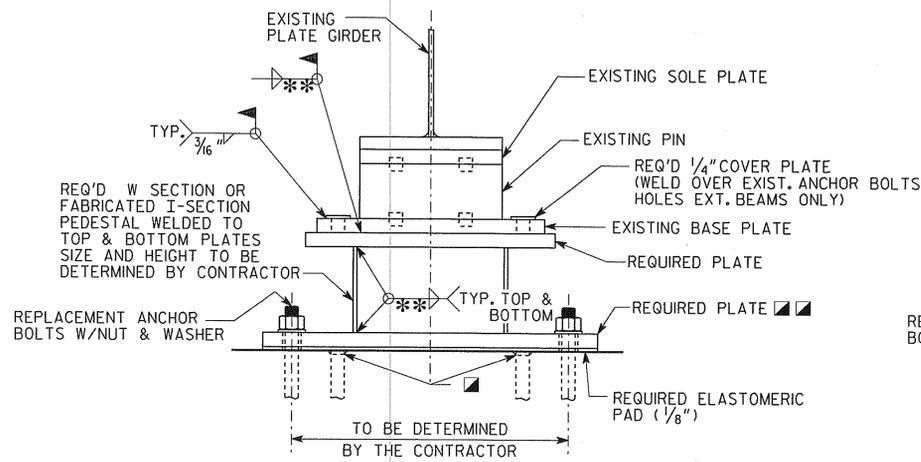

PEDESTAL/BEARING ASSEMBLY SCHEMATIC


(ABUTMENTS 1 & 6, BENTS 3 & 4)

- CHIP CONCRETE AROUND EXISTING ANCHOR BOLTS TO 3/16" BELOW TOP OF CAP, CUT ANCHOR BOLTS AND FILL HOLE WITH EPOXY BONDING COMPOUND
- ** SIZE TO BE DETERMINED BY THE CONTRACTOR
- SEE NOTES


PEDESTAL/BEARING ASSEMBLY SCHEMATIC

(BENTS 2 & 5)

- CHIP CONCRETE AROUND EXISTING ANCHOR BOLTS TO 3/16" BELOW TOP OF CAP, CUT ANCHOR BOLTS AND FILL HOLE WITH EPOXY BONDING COMPOUND
- ** SIZE TO BE DETERMINED BY THE CONTRACTOR
- SEE NOTES

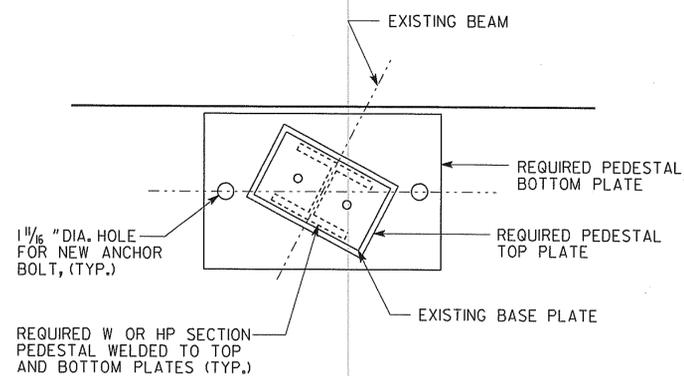


PLAN SCHEMATIC (END BENTS ONLY)

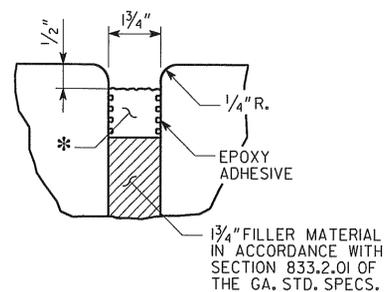


1 3/4" EXPANSION JOINT DETAIL

(ABUTMENTS 1 AND 6, BENT 3)
* SEAL PER SECTION 449.2.D OF THE GA. STD. SPECS.

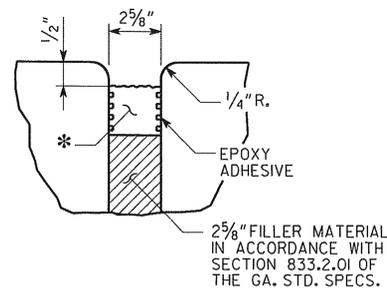

2 5/8" EXPANSION JOINT DETAIL

(BENT 4)
* SEAL PER SECTION 449.2.D OF THE GA. STD. SPECS.

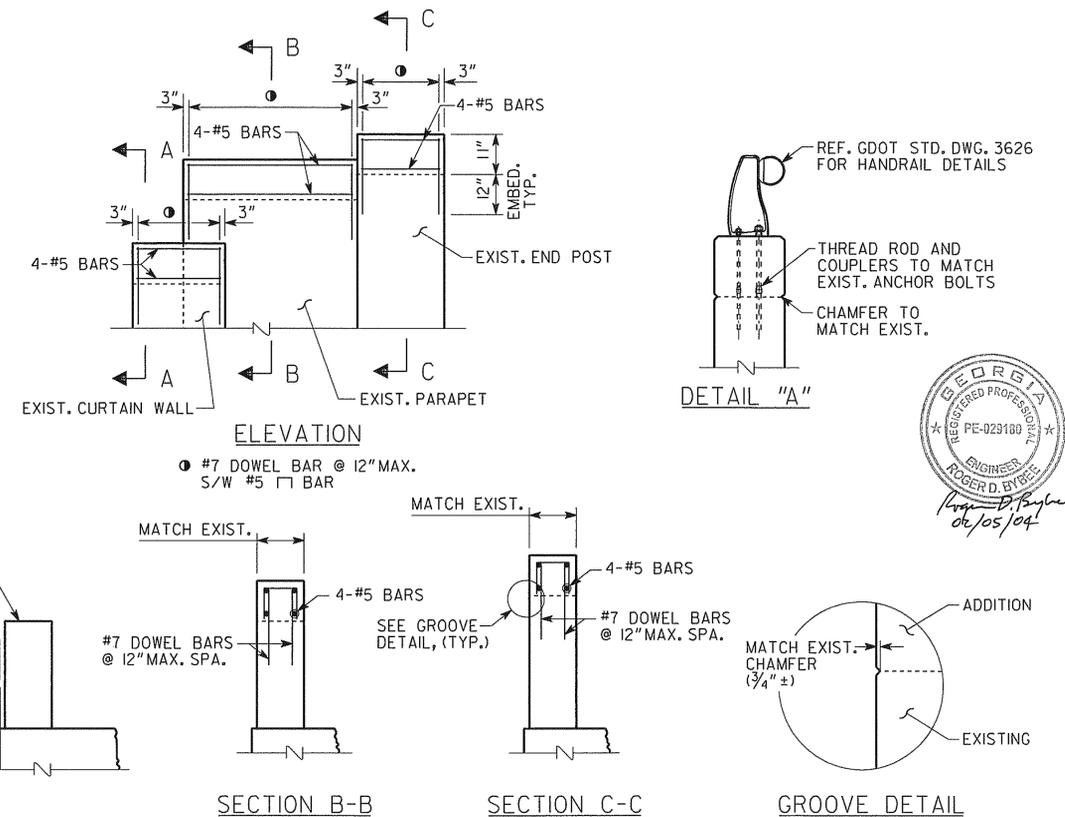

| JT. PLAN DIM.* | DIM. @ 30°F | DIM. @ 90°F |
|----------------|-------------|-------------|
| 3/4" | 1 1/8" | 3/8" |
| 1" | 1 1/2" | 1/2" |
| 1 3/4" | 2" | 1 1/2" |
| 2 1/4" | 2 11/16" | 1 3/16" |
| 2 5/8" | 3 1/16" | 2 3/16" |
| 3" | 3 1/2" | 2 1/2" |

* DENOTES: JOINT DIMENSION AT 60°F



BRIDGE NO. 1

GEORGIA
DEPARTMENT OF TRANSPORTATION
PRECONSTRUCTION DIVISION-OFFICE OF BRIDGE DESIGN

JACKING DETAILS
WOODSTOCK ROAD OVER I-75
CHEROKEE CO. MHS-M001-00(995)



BRIDGE SHEET
3 OF 3

SCALE: NONE NOVEMBER 2003
DESIGNED: RDB CHECKED: RDB REVIEWED: RDB
DRAWN: RCP DESIGN GROUP APPROVED: REL