STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	CSNHS-M002-00(823)	15	269

SUMMARY OF QUANTITIES-OVERHEAD WIRE SPAN

STATION	SPAN WIDTH	LANE	SIGNS-TYPE 1 MAT'L (0.08) CODE	SIZE	QUAN.	SQ. FT.	SIGNS-TYPE 2 MAT'L (0.10) CODE	SIZE	QUAN.	SQ. FT.	GALV. SEIMANS-MARTIN GUY STRAND MESSENGER CABLE (lin. ft.)-(Including 3-bolt 1" galv. clamps with 5/8" galv. bolts.) 3/8" DIA. CABLE LIN. FT.	STRAIN POLES (CONCRETE OR STEEL) EACH TYPE I	TYPE II	TYPE III	TREATED TIMBER POLES, CLASS 2, 30 FT. EACH
17+00	105'-00"	1					M-SPEC #1	30 X 36		7.50	105'-00"			2	
		2					M-SPEC #2	36 X 36		9.00					
		3					R3-3	36 X 36		9.00					
		4 & 5					M-SPEC #3	36 X 36		9.00					
		6					R3-5R	30 X 36		7.50					
		6					M-SPEC #4	36 X 36		9.00					
28+53	100'-00"	1					M-SPEC #5	36 X 36		9.00	107'-00"			2	
		2					M-SPEC #6	30 X 36		7.50					
		3					R3-3	36 X 36		9.00					
		4 & 5					M-SPEC #4	36 X 36		9.00					
		6					R3-5R	30 X 36		7.50					
		6					M-SPEC #3	36 X 36		9.00					
504+15	65'-00"	1					M-SPEC #5	36 X 36		9.00	65'-00"		2		
		1					R3-5L	30 X 36		7.50					
		2					R3-5L	30 X 36		7.50					
		3					R3-5R	30 X 36		7.50					
		3					M-SPEC #2	36 X 36		9.00					
		3					M-SPEC #1	30 X 36		7.50					
56+40	72'-00"	1					M-SPEC #1	30 X 36		7.50	72'-00"		2		
		1 & 2					M-SPEC #2	36 X 36		9.00					
		2					R3-5L	30 X 36		7.50					
		3					R3-5R	30 X 36		7.50					
		3 & 4					M-SPEC #5	36 X 36		9.00					
TOTALS	237.00									190.50	244.00		4	4	

NOTE: 1. FOR CABLE AND STRAIN POLES REFER TO SECTION 639 GA. STD. SPECIFICATIONS.
2. LANE NUMBERS ASSIGNED FROM CENTER LINE OUT IN DIRECTION OF SURVEY.
3. WHEN TWO OR MORE SIGN FACING THE SAME DIRECTION ARE TO BE MOUNTED OVER THE SAME LANE(S), THE SIGNS SHALL BE CENTERED OVER THE LANE(S) WITH A 2' SPACE BETWEEN SIGNS.
4. FOR ERECTION DETAILS SEE 'TYPICAL ERECTION DETAILS-OVERHEAD LANE MARKERS'.

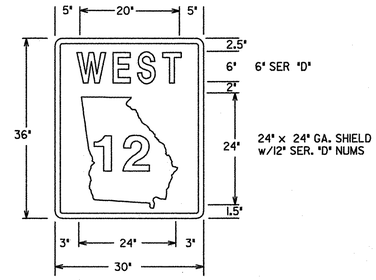

M-SPECIAL #1

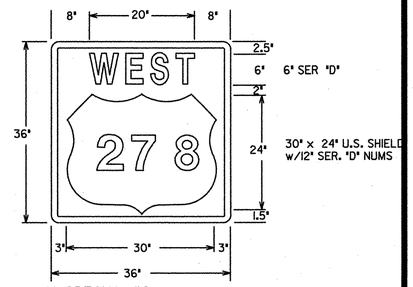

M-SPECIAL #2

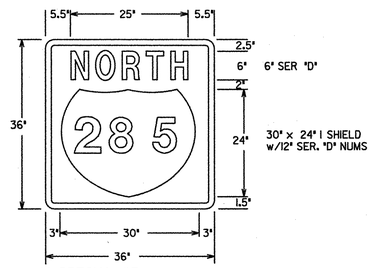

M-SPECIAL #3

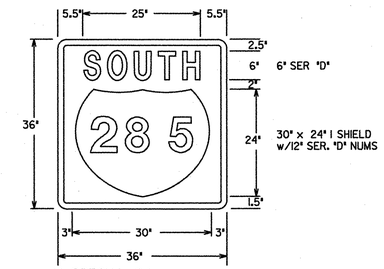

M-SPECIAL #4

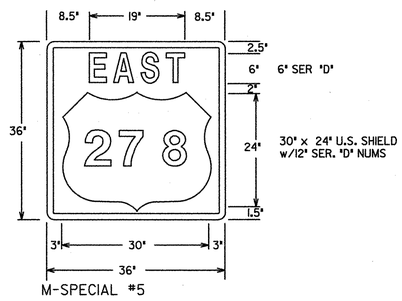

M-SPECIAL #5

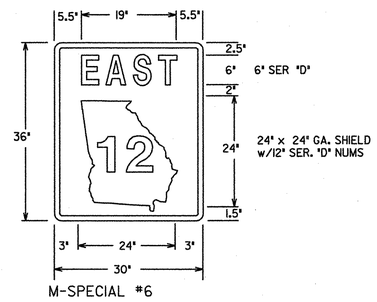

M-SPECIAL #6

R3-5R

R3-3

HIGHWAY SIGNS (EACH)	
REMOVE	RESET
3	3

NOTES:
1. For sign locations see plans sheets.
2. Signs to be reset as required and/or directed by the Engineer.
3. Contractor will contact GEORGIA LOGO at (770)447-6399 to advise on 'REMOVE & REST' of the LOGO SIGNS.

MOUNTING DIMENSIONS			
H	A	B	C
12"	9"	1½"	36"
18"	15"	1½"	24"
24"	18"	1½"	18"
30"	24"	3"	12"



FOR MOUNTING TO MAST ARMS STRUCTURES.
(NOT TO SCALE)
NOTE: USE ASTRO MINI SIGN BRAC AND CLAMP OR EQUIVALENT

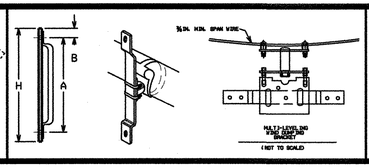

GENERAL NOTES:
1. EACH SIGN SHALL CONTAIN A MINIMUM OF TWO (2) HANGERS OR BRACKETS.
2. SIGN LEGEND SHALL BE 8-IN. UPPER CASE & 6-IN. LOWER CASE SERIES 'D' LETTERS ALL ARROWS SHALL BE 6-IN. TALL & 9-IN. LONG
3. EACH SIGN SHALL CONTAIN 1/2-IN BORDERS AND 1 1/2-IN RADII.
4. EACH SIGN SHALL BE MADE OF ONE CONTINUOUS PIECE OF ALUMINUM.
5. SIGNS SHALL HAVE STANDARD REFLECTORIZED INTERSTATE GREEN BACKGROUND WITH WHITE REFLECTORIZED LEGENDS, BORDERS AND ARROWS.

GRESHAM SMITH AND PARTNERS

DATE	REVISIONS

GEORGIA
DEPARTMENT OF TRANSPORTATION
SUMMARY OF QUANTITIES
PROJECT - CSNHS-M002-00(823)
COUNTY - DEKALB
DATE SHEET 6-05

DGN
$DATE$