VOID



# DETAILS & CLEARANCE DIAGRAM FOR OVERHEAD SIGNS

## STRUCTURAL SUPPORT #NAV/C23590

## MP 235.90, I-75 S.B.

## - NO SCALE -




3" Radius, 1" Border, White on Green;
[EXIT] E Mod; [235] E Mod;
12" Radius, 3" Border, White on Green;
[SOUTH] E Mod; [Macon] E Mod;
12" Radius, 3" Border, White on Green;
[Griffin] E Mod; [Jonesboro] E Mod;
12" Radius, 3" Border, White on Green;
1; Arrow_03; [1] E Mod; [MILE] E Mod; Arrow_05;

EXISTING STRUCTURE

### SIGN DATA

PROPOSED SIGN AREA: 736.25 SQ. FT.
DESIGN SIGN AREA: 470.25 SQ. FT.

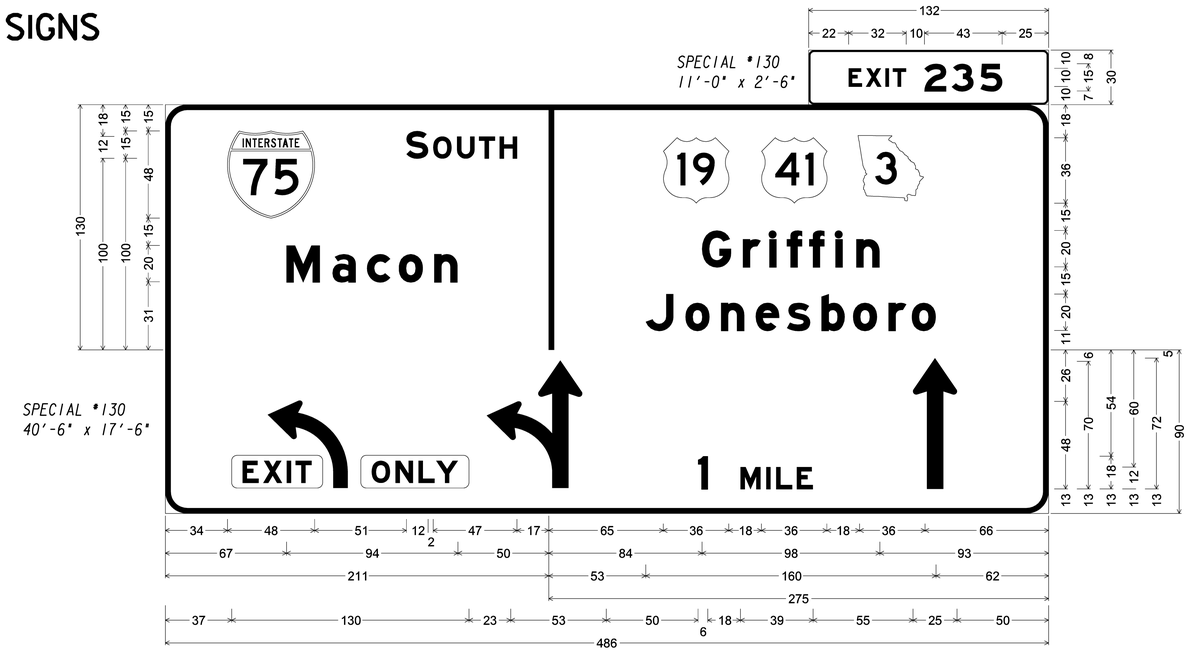


### DESIGN DATA

| | |
|---|---|
| STRUCTURAL SUPPORT | EXISTING TYPE I |
| DESIGN SIGN AREA | 470.25 SQ. FT. |
| DESIGN WIND VELOCITY | PER A.A.S.H.T.O. SPECS. |
| HEIGHT ABOVE GENERAL GROUND ELEVATION | 15' - 30' |
| STRUCTURE LENGTH | 80'-0" |

GRESHAM SMITH AND PARTNERS

URS

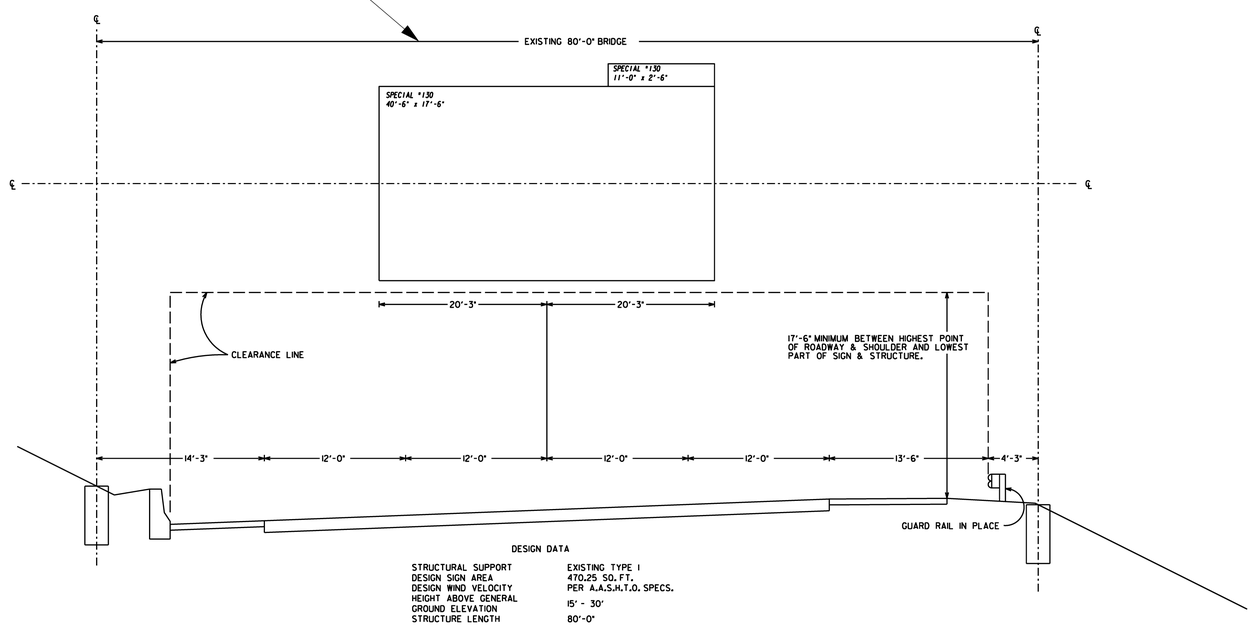GEORGIA DEPARTMENT OF TRANSPORTATION

REVISION DATES

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION

OFFICE: PROGRAM DELIVERY

SIGNING AND MARKING PLANS

CLEARANCE DIAGRAM

DRAWING No. 26-018

3/1/2007 GPLN