RELEASED FOR CONSTRUCTION- 1/19/2016

STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.			

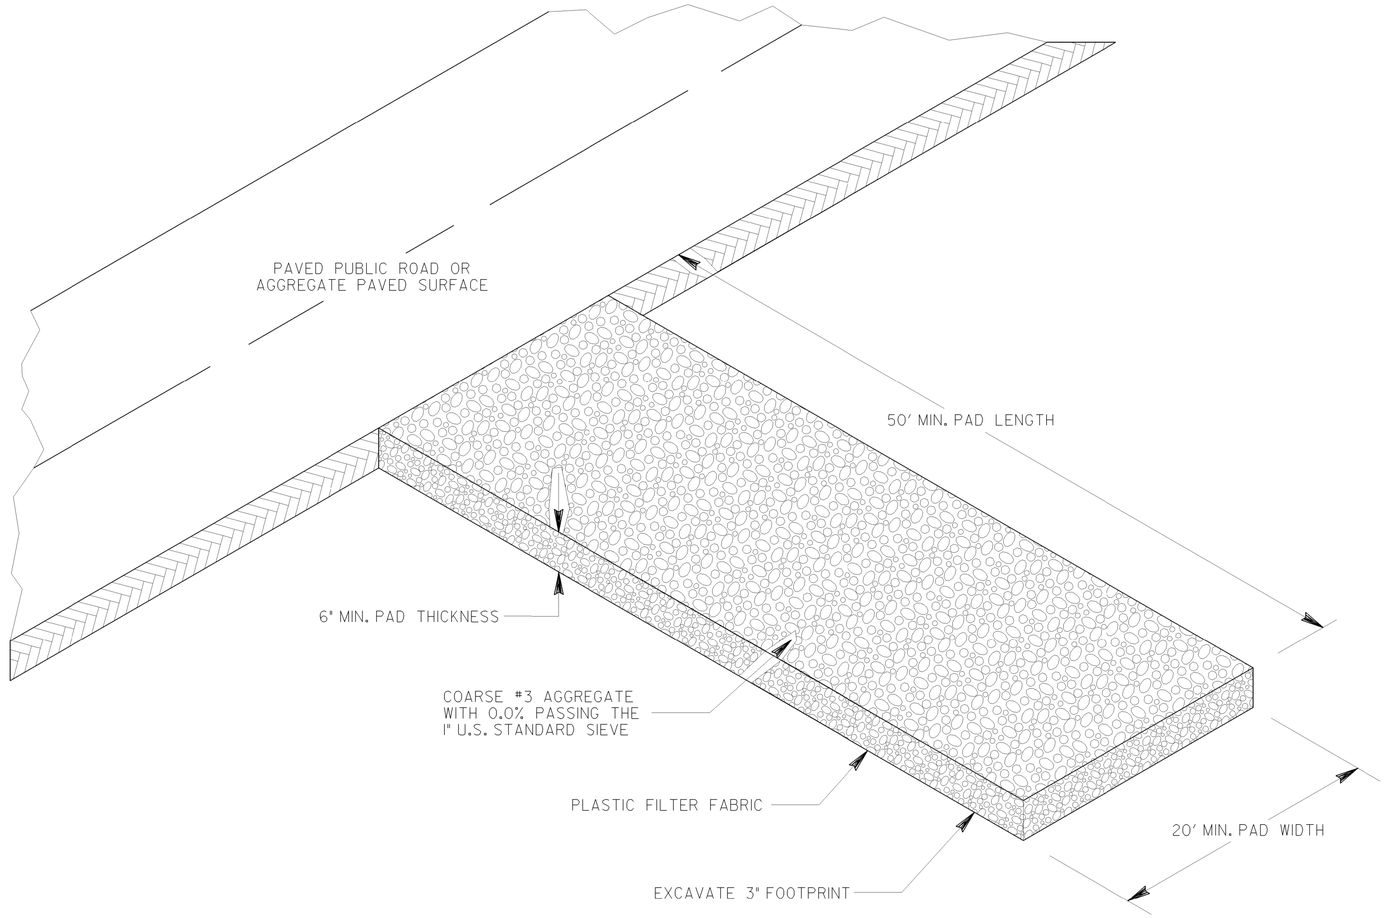

NOTES:
1) STONE AGGREGATE SHALL BE KEPT LOOSE OR SCARIFIED WHEN AGGREGATE BECOMES CONSOLIDATED.
2) CONSTRUCTION EXITS ARE NOT REQUIRED FOR DIRT PUBLIC ROADS.

MAINTENANCE

THE EXIT SHALL BE MAINTAINED IN A CONDITION WHICH WILL PREVENT TRACKING OR FLOW OF MUD ONTO PUBLIC RIGHTS-OF-WAY. THIS MAY REQUIRE PERIODIC TOP DRESSING WITH COARSE #3 AGGREGATE, AS CONDITIONS DEMAND, AND REPAIR AND/OR CLEANOUT OF ANY STRUCTURES TO TRAP SEDIMENT. ALL MUD AND DEBRIS SPILLED, DROPPED, WASHED, OR TRACKED FROM VEHICLES OR SITE ONTO ROADWAYS OR INTO STORM DRAINS MUST BE REMOVED IMMEDIATELY.

PAY ITEM: 163-0300__CONSTRUCTION EXIT___EACH

1-19-11 DATE	DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA	
REV. CONSTR. EXIT LABELS REVISION	CONSTRUCTION DETAILS CONSTRUCTION EXIT NO SCALE — FEBRUARY 2001	
TPC BY		NUMBER D-41