5/2011 9:45:38 AM \\GDOT-DSN1\GOPLOT\OCR\d4_PDF_Out_mono_200dpi.qct baanman C:\001358\dgn\0001358_0007.prt

STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GEORGIA	BR000-0001-00(358)	7	167

TYPICAL SECTION

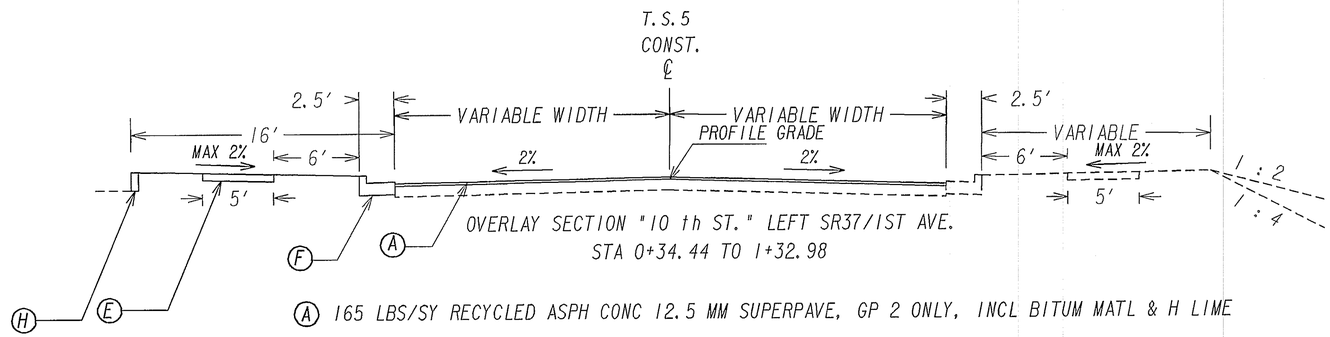

(A) 165 LBS/SY RECYCLED ASPH CONC 12.5 MM SUPERPAVE, GP 2 ONLY, INCL BITUM MATL & H LIME

(E) 4" CONCRETE SIDEWALK

(F) 8" X 30" CURB AND GUTTER "CURB FACE TYPE 2"

(G) RECYCLED ASPH CONC LEVELING, INCL BITUM MATL AS REQUIRED BY THE ENGINEER

(H) HEADER CURB

USE ON CONSTRUCTION

DETAIL OF TURNOUTS

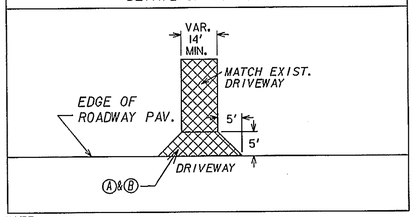

NOTE:
DRIVEWAYS SHALL BE PAVED TO TIE-END POINT OR RIGHT -OF -WAY, WHICHEVER IS GREATER.



NO SCALE
CLASS "B" CONCRETE BASE OR PAVEMENT WIDENING
Item Code 500-9999 - Cu. Yds.

In excavated areas between the existing paving and new curb and gutter that are 5'-0" or less in width, Class "B" concrete shall be placed in lieu of the base and paving specified by the typical section. Payment will be made under "Class B Concrete Base and Pavement Widening".

In excavated areas greater than 5'-0" in width, the Contractor shall place base and paving as specified on the typical section.
See plans for details of curb and gutter construction.

CLASS "B" CONCRETE BASE OR WIDENING DETAIL

SLOPE CONTROLS		
SLOPE	CUT BACKSLOPE	FILL
4:1	0-10'	0-10'
2:1	> 10'	> 10'

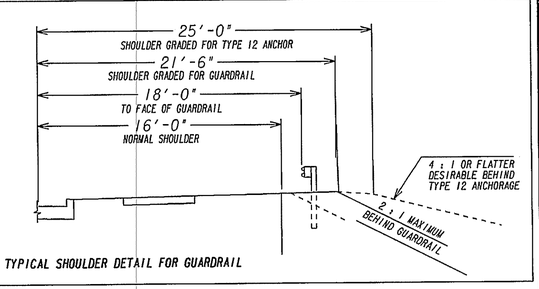

TYPICAL SHOULDER DETAIL FOR GUARDRAIL

GEORGIA
DEPARTMENT OF TRANSPORTATION

REVISION DATES		
8 15 11		

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE:
TYPICAL SECTIONS
SIDE RD. 10th ST.
BR000-0001-00(1358)
COLQUIIT COUNTY

DRAWING No. 5-003