DETAILS OF OVERHEAD STREET NAME SIGNS

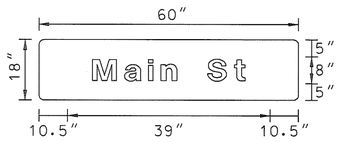

D-SPEC. # 1
2 EA. REQ'D

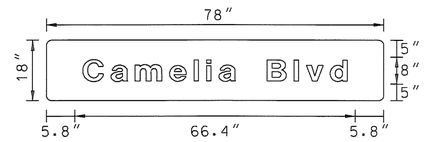

D-SPEC. #2
3 EA. REQ'D

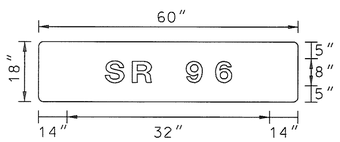

D-SPEC. # 3
4 EA. REQ'D

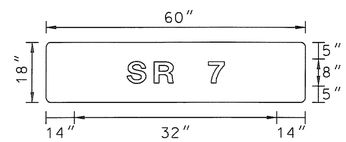

D-SPEC. # 4
2 EA. REQ'D

GENERAL NOTES:

1 EACH SIGN SHALL CONTAIN A MINIMUM OF TWO (2) HANGERS OR BRACKETS.

2 SIGN LEGEND SHALL BE 8-IN. UPPER CASE & 6-IN. LOWER CASE SERIES "D" LETTERS, ALL ARROWS SHALL BE 6" TALL & 9" LONG

3 EACH SIGN SHALL CONTAIN ½" BORDERS AND 1½" RADII.

4 EACH SIGN SHALL BE MADE OF ONE CONTINUOUS PIECE OF ALUMINUM.

5 SIGNS SHALL HAVE STANDARD REFLECTORIZED INTERSTATE GREEN BACKGROUND WITH WHITE REFLECTORIZED LEGENDS, BORDERS AND ARROWS.

MOUNTING DIMENSIONS			
H	A	B	C
12"	9"	1½"	36"
18"	15"	1½"	24"
24"	18"	1½"	18"
30"	24"	3"	12"



FOR MOUNTING TO MAST ARMS STRUCTURES.

(NOT TO SCALE)

NOTE: USE ASTRO MINI SIGN BRAC AND CLAMP OR EQUIVALENT

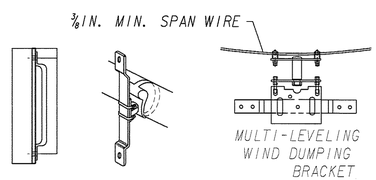

MULTI-LEVELING WIND DUMPING BRACKET

(NOT TO SCALE)

SUMMARY OF QUANTITIES FOR OVERHEAD STREET NAME SIGNS

SIGNS - TYPE 2 MAT'L, REFL SHEETING TYPE 9				
LOCATION	CODE	SIZE	QUANTITY	SQUARE FEET
INTERSECTION #1				
SR 49 (CAMELIA BLVD)	DSPEC #1	60" X 18"	2	15
@ MAIN ST	DSPEC #2	78" X 18"	1	9.75
INTERSECTION #2				
SR 49 (CAMILIA BLVD)	DSPEC #2	78" X 18"	2	20
@ SR 7	DSPEC #3	60" X 18"	4	30
	DSPEC #4	60" X 18"	2	15
TOTAL			11	89.75

Stantec
STANTEC CONSULTING
3160 MAIN STREET
SUITE 100
DULUTH, GA 30096
(770) 813-0882

Heath & Lineback Engineers
INCORPORATED
2390 CANTON ROAD, BUILDING 200
MARIETTA, GEORGIA 30066-5393
(770)424-1668

REVISION DATES

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: DISTRICT 3 DESIGN

SUMMARY OF QUANTITIES

SR 49 DRAINAGE IMPROVEMENTS
COUNTY: PEACH

DRAWING No. 27-002

J:/2008030/2008030009/0003623/DGN/003623