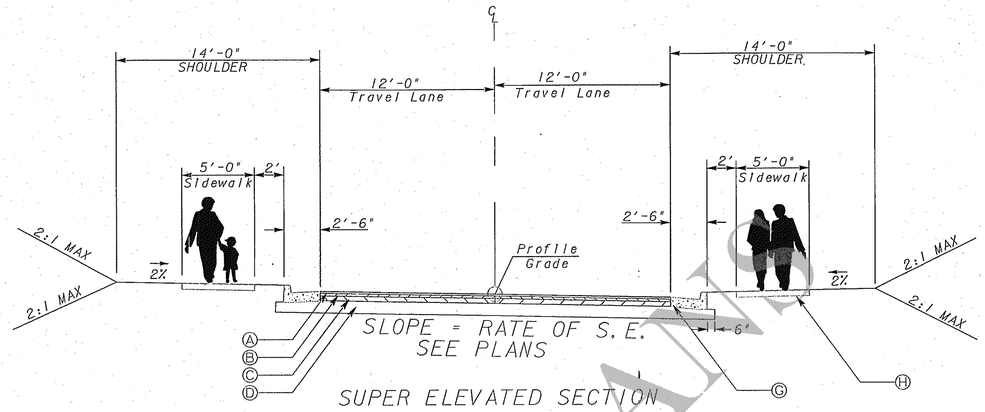

SLOPE = RATE OF S.E.
SEE PLANS

SUPER ELEVATED SECTION

TYPICAL SECTION #12

OLD ROPE MILL ROAD
(RELOCATION)
STA. 200+00.00 TO STA. 203+94.00
STA. 213+59.70 TO STA. 228+62.18

REQUIRED PAVEMENT

- (A) ASPHALTIC CONCRETE 12.5mm SUPERPAVE, 165 lb/yd^2
- (B) ASPHALTIC CONCRETE 19mm SUPERPAVE, 220 lb/yd^2
- (C) ASPHALTIC CONCRETE 25mm SUPERPAVE, 440 lb/yd^2
- (D) GRADED AGGREGATE BASE, 10"
- (G) 8"x30" CONC. CURB & GUTTER, GA. STD. 9032 B. TYPE 2
- (H) 4"x5' CONC. SIDEWALK, DETAIL A-3

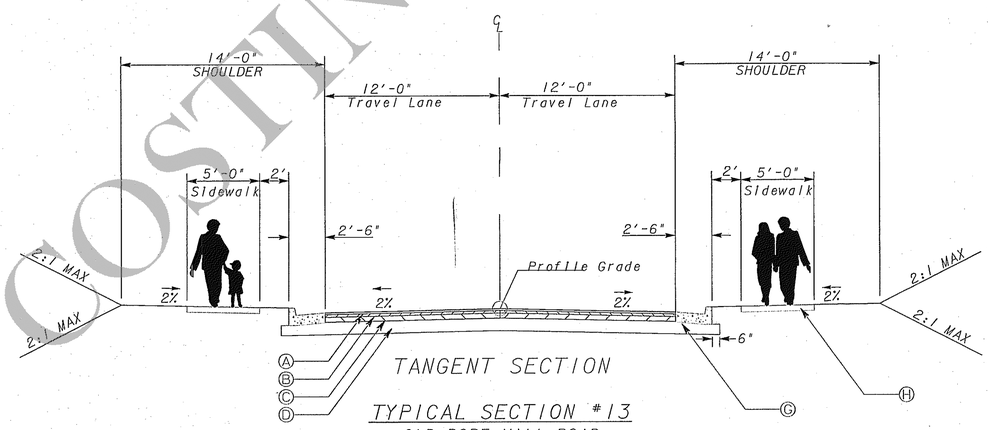

TANGENT SECTION

TYPICAL SECTION #13

OLD ROPE MILL ROAD
(RELOCATION)
STA. 203+94.00 TO STA. 213+59.70
STA. 228+62.18 TO STA. 229+31.14

COSTING PLANS

CROY ENGINEERING
Engineers Planners Surveyors
200 NORTH COBB PARKWAY, BLDG. 400, SUITE 413
MARIETTA, GA 30062
PHONE: (770) 971-5407 FAX: (770) 971-0520

NOT TO SCALE

REVISION DATES		

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: INNOVATIVE PROGRAM DELIVERY

TYPICAL SECTIONS

RIDGEWALK PARKWAY
OVER I-575

DRAWING No. 5-05

GPLN