DETAILS OF OVERHEAD STREET NAME SIGNS



D3-1 * 1
4 EA. REQ'D



D3-1 * 7A
12 EA. REQ'D



D3-1 * 12
1 EA. REQ'D
*SERIES C



D3-1 * 2
1 EA. REQ'D
*SERIES C



D3-1 * 7B
5 EA. REQ'D



D3-1 * 13
1 EA. REQ'D
*SERIES C



D3-1 * 3
1 EA. REQ'D
*SERIES C



D3-1 * 8
2 EA. REQ'D



D3-1 * 14
8 EA. REQ'D



D3-1 * 4
1 EA. REQ'D



D3-1 * 9
2 EA. REQ'D
*SERIES C



D3-1 * 15A
1 EA. REQ'D
*SERIES C



D3-1 * 5
1 EA. REQ'D



D3-1 * 10
1 EA. REQ'D



D3-1 * 15B
1 EA. REQ'D
*SERIES C



D3-1 * 6
2 EA. REQ'D
*SERIES C



D3-1 * 11
1 EA. REQ'D



D3-1 * 16
2 EA. REQ'D

NOTE: SIGNS USE SERIES 'D' LETTERS UNLESS OTHERWISE SPECIFIED.

SUMMARY OF QUANTITIES FOR OVERHEAD STREET NAME SIGNS

SIGNS - TYPE 2 MAT'L, REFL SHEETING TYPE 9

LOCATION	CODE	SIZE	QUANTITY	SQUARE FEET
INTERSECTION *1				
SR 201 (LAFAYETTE RD)	D3-1 *1	8.5' X 2'	2	34
@ MT. VERNON/UTILITY RD	D3-1 *2	10' X 2'	1	20
	D3-1 *3	10' X 2'	1	20
	D3-1 *4	8' X 2'	1	16
	D3-1 *5	8' X 2'	1	16
INTERSECTION *2				
SR 3 (CHATTANOOGA RD)	D3-1 *6	9.5' X 2'	1	19
@ SR 201 (LAFAYETTE RD)	D3-1 *1	8.5' X 2'	2	34
INTERSECTION *3				
SR3 (DALTON BYPASS)	D3-1 *7A	9' X 2'	1	18
@ WILLOWDALE RD	D3-1 *8	9.5' X 2'	2	38
INTERSECTION *4				
SR3 (DALTON BYPASS)	D3-1 *7A	9' X 2'	1	18
@ THORNTON AVE	D3-1 *9	9.5' X 2'	2	38
INTERSECTION *5				
SR3 (DALTON BYPASS)	D3-1 *7A	9' X 2'	2	36
@ REED RD/	D3-1 *10	7.5' X 2'	1	15
CHATTANOOGA AVE	D3-1 *11	7.5' X 2'	1	15
	D3-1 *12	10' X 2'	1	20
	D3-1 *13	10' X 2'	1	20
INTERSECTION *6				
SR71 (CLEVELAND HWY)	D3-1 *14	10' X 2'	2	40
@ WESTBROOK RD	D3-1 *15A	9.5' X 2'	1	19
	D3-1 *15B	9.5' X 2'	1	19
INTERSECTION *7				
SR71 (CLEVELAND HWY)	D3-1 *14	10' X 2'	1	20
@ DAWNVILLE RD	D3-1 *16	9' X 2'	2	36
SUBTOTAL			28	511

MOUNTING DIMENSIONS			
H	A	B	C
12"	9"	1½"	36"
18"	15"	1½"	24"
24"	18"	1½"	18"
30"	24"	3"	12"

FOR MOUNTING TO MAST ARMS STRUCTURES.
(NOT TO SCALE)
NOTE: USE ASTRO MINI SIGN BRAC AND CLAMP OR EQUIVALENT

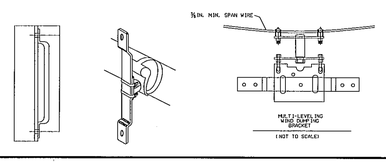

Stantec

GENERAL NOTES:

1 EACH SIGN SHALL CONTAIN A MINIMUM OF TWO (2) HANGERS OR BRACKETS.

2 EACH SIGN SHALL CONTAIN ½" BORDERS AND 1½" RADII.

3 EACH SIGN SHALL BE MADE OF ONE CONTINUOUS PIECE OF ALUMINUM.

4 SIGNS SHALL HAVE STANDARD REFLECTORIZED INTERSTATE GREEN BACKGROUND WITH WHITE REFLECTORIZED LEGENDS, BORDERS AND ARROWS.

REVISION DATES

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: Program Delivery
SUMMARY QUANTITIES
CONSTRUCTION AND INSTALLATION

DRAWING No. 6-002

3/1/2007 GPLN