


VOID

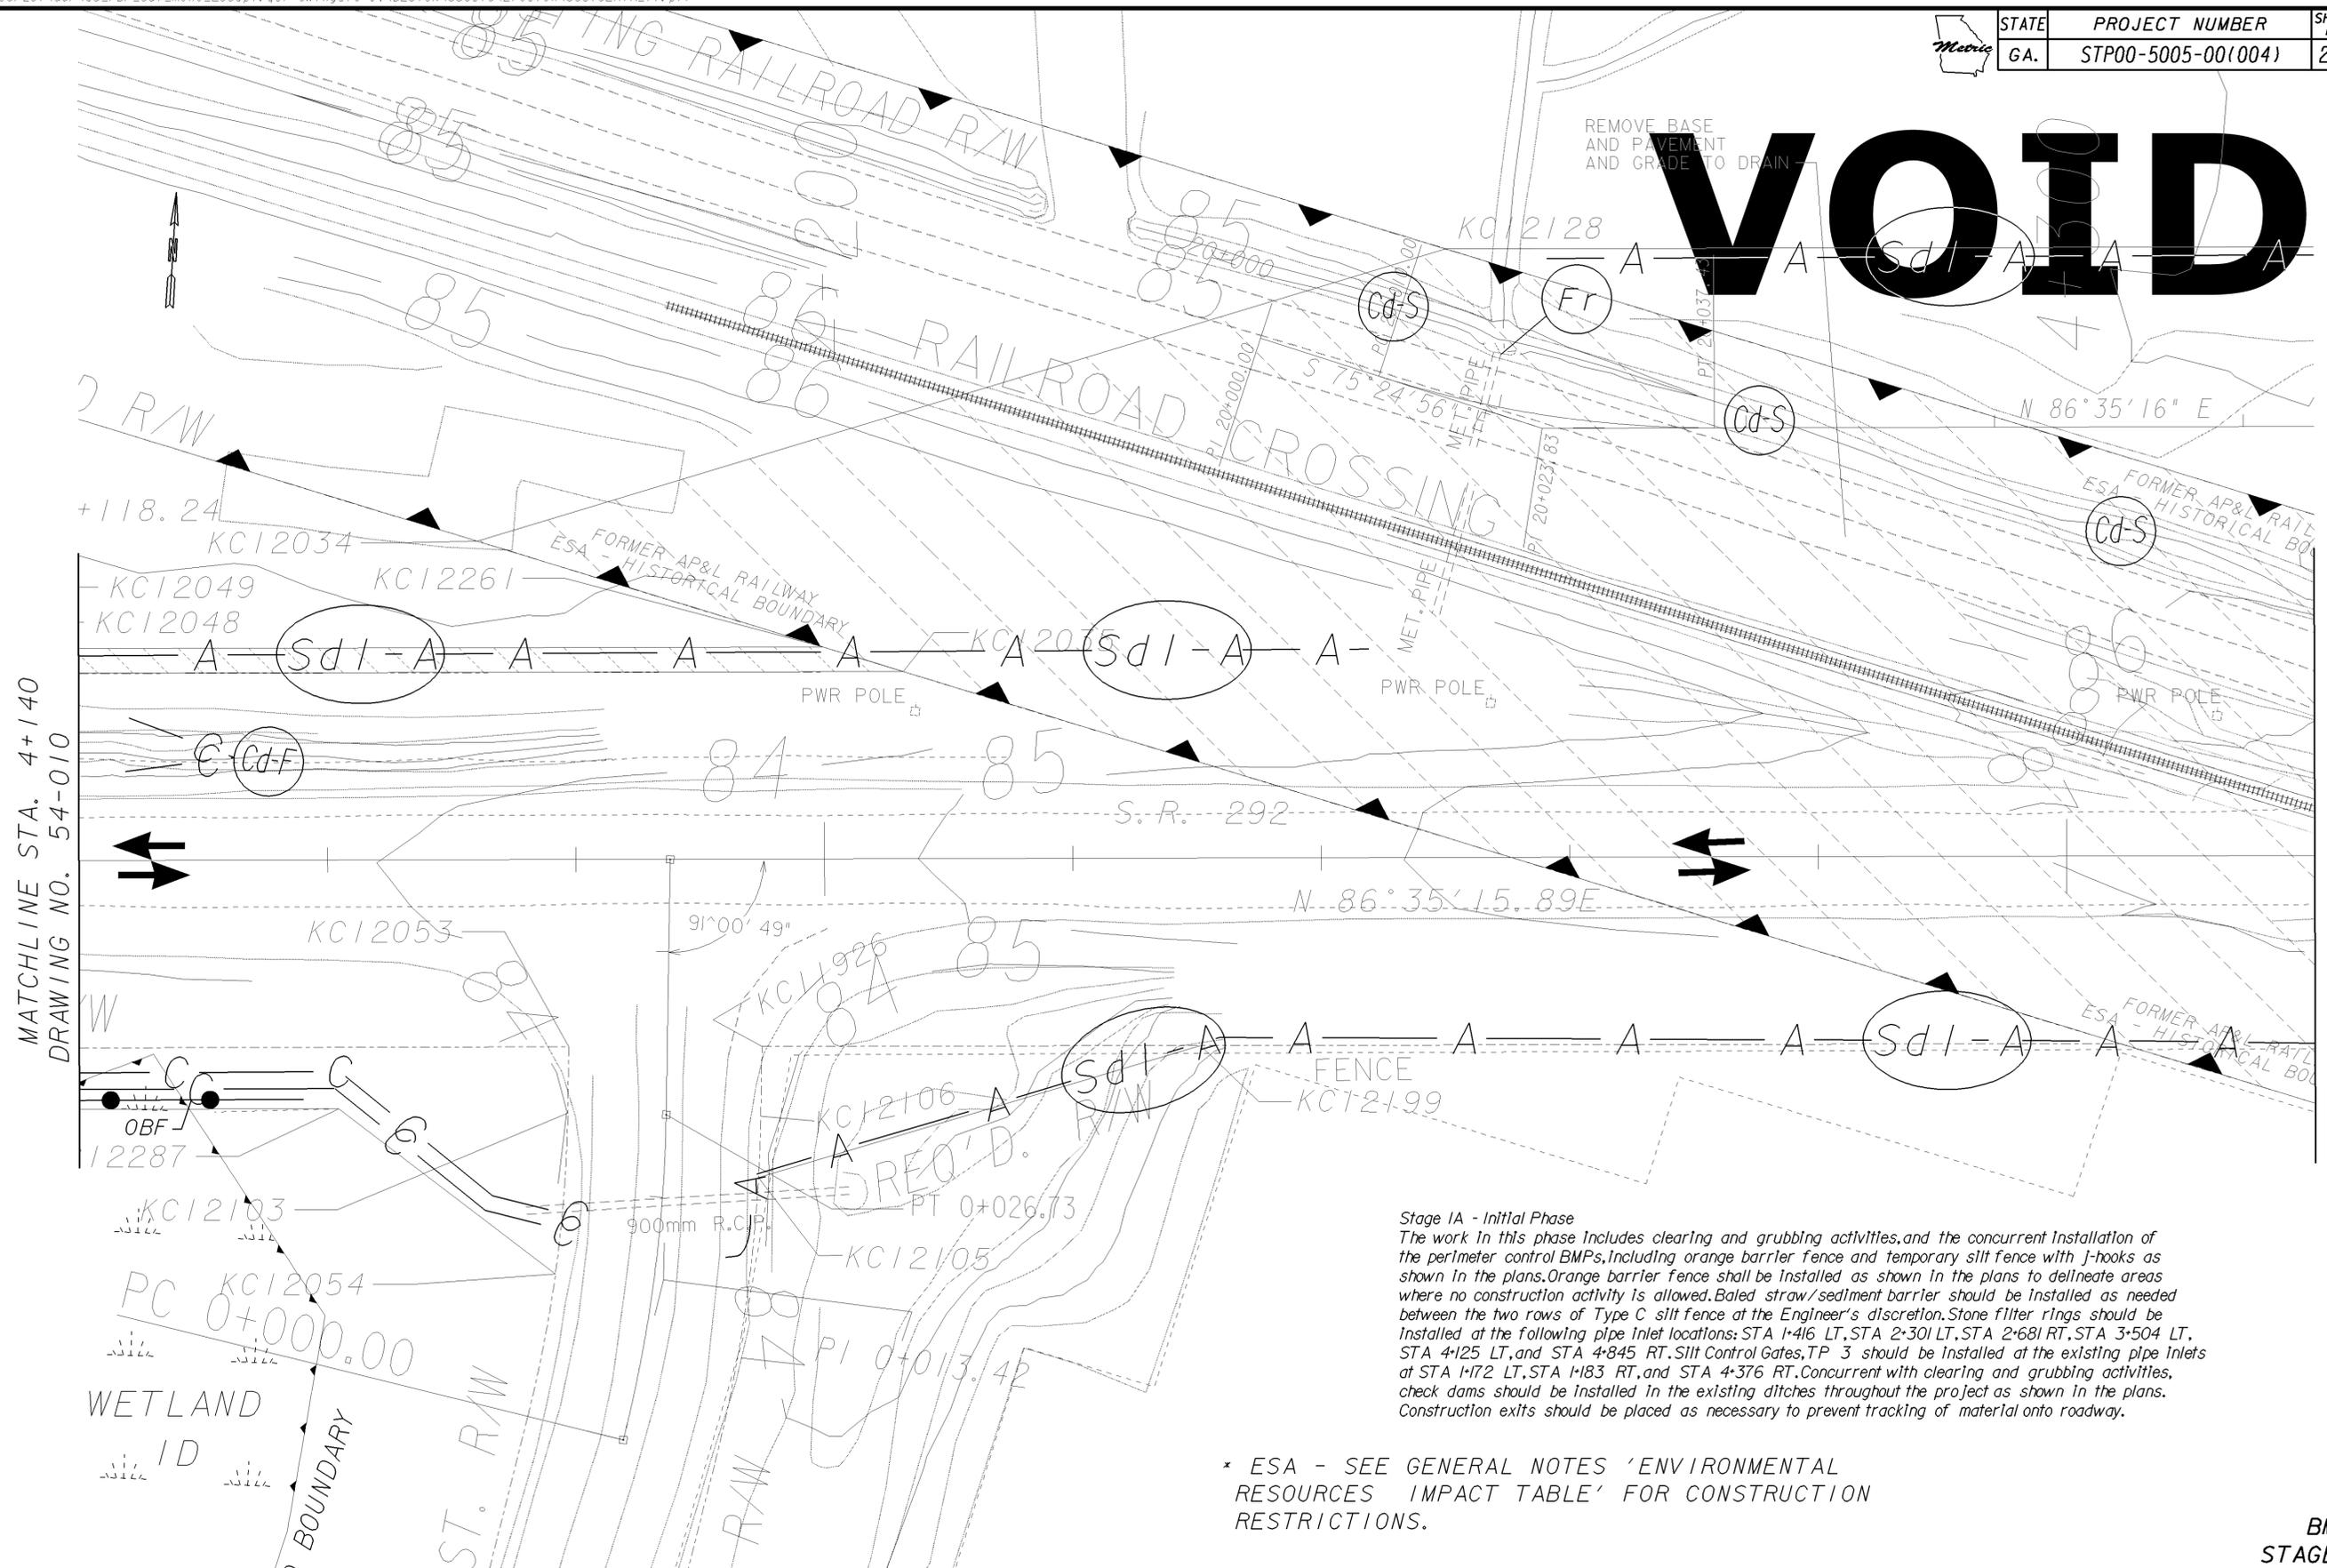


Stage IA - Initial Phase
 The work in this phase includes clearing and grubbing activities, and the concurrent installation of the perimeter control BMPs, including orange barrier fence and temporary silt fence with J-hooks as shown in the plans. Orange barrier fence shall be installed as shown in the plans to delineate areas where no construction activity is allowed. Baled straw/sediment barrier should be installed as needed between the two rows of Type C silt fence at the Engineer's discretion. Stone filter rings should be installed at the following pipe inlet locations: STA 1+416 LT, STA 2+301 LT, STA 2+681 RT, STA 3+504 LT, STA 4+125 LT, and STA 4+845 RT. Silt Control Gates, TP 3 should be installed at the existing pipe inlets at STA 1+172 LT, STA 1+183 RT, and STA 4+376 RT. Concurrent with clearing and grubbing activities, check dams should be installed in the existing ditches throughout the project as shown in the plans. Construction exits should be placed as necessary to prevent tracking of material onto roadway.

* ESA - SEE GENERAL NOTES 'ENVIRONMENTAL RESOURCES IMPACT TABLE' FOR CONSTRUCTION RESTRICTIONS.

**BMP
STAGE IA**

PROPERTY AND EXISTING R/W LINE	---
REQUIRED R/W LINE	---
CONSTRUCTION LIMITS	---
EASEMENT FOR CONSTR & MAINTENANCE OF SLOPES	▨
EASEMENT FOR CONSTR OF SLOPES	▩
EASEMENT FOR CONSTR OF DRIVES	▧

LEGEND	
OPEN LANES OF TRAFFIC	↔

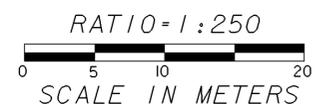

DATE	REVISIONS	DATE	REVISIONS

LAND LOT NO.	
LAND DISTRICT	
GMD 51	

GEORGIA
 DEPARTMENT OF TRANSPORTATION
BMP LOCATION DETAILS
 PROJECT: STP00-5005-00(004)
 COUNTY: MONTGOMERY/TOOMBS