STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	CM-575-1(34)	61	113

SYSTEM BLOCK DIAGRAM
HUB P - NETWORK ELECTRONICS

HUB P - EQUIPMENT CONFIGURATION LIST			
ITEM CODE NO.	DESCRIPTION	UNIT	QUANTITY
935-3408	FIBER OPTIC CLOSURE, FDC (RACK MOUNTED), 144 FIBER	EA	2
935-4010	FIBER OPTIC SPLICE, FUSION	EA	288
939-2240	GBIC, TYPE E	EA	9

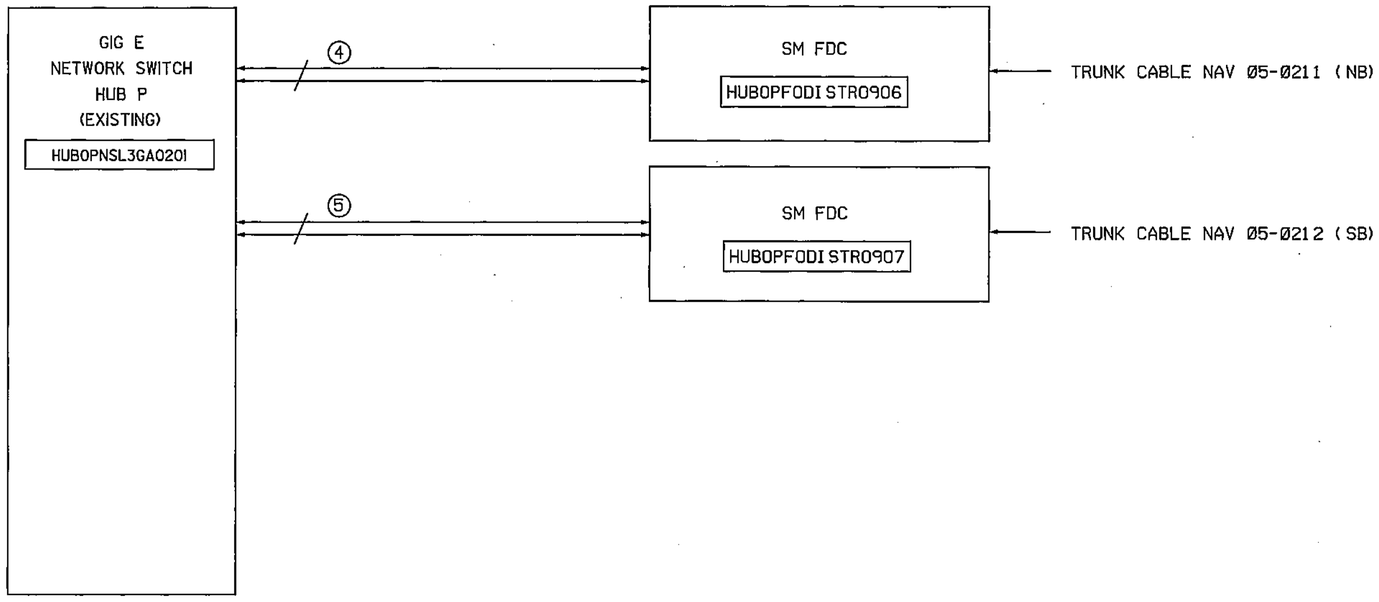

LEGEND

DUPLEX FIBER OPTIC JUMPER

NOTE:
1. THE CONTRACTOR SHALL CONTACT THE GDOT PROJECT ENGINEER FOUR WEEKS PRIOR TO INSTALLATION IN THE HUBS. THE CONTRACTOR SHALL PROVIDE THE HUB GBIC'S TO THE GDOT PROJECT ENGINEER (FURNISH ONLY).

USE ON CONSTRUCTION

GRESHAM SMITH AND PARTNERS

OFFICE OF TRAFFIC SAFETY & DESIGN

DATE	REVISIONS
3/21/07	ADDED FDC RACK AND POSITION IDS

I-575 ATMS
HUB P - NETWORK ELECTRONICS

PROJECT - CM-575-1(34)
COUNTY - COBB/CHEROKEE
DATE - 05/02/06 SHEET 28-36

g:\2391803\t\714090BLOCKDIAGRAMHUBP.dgn
3/28/2007