
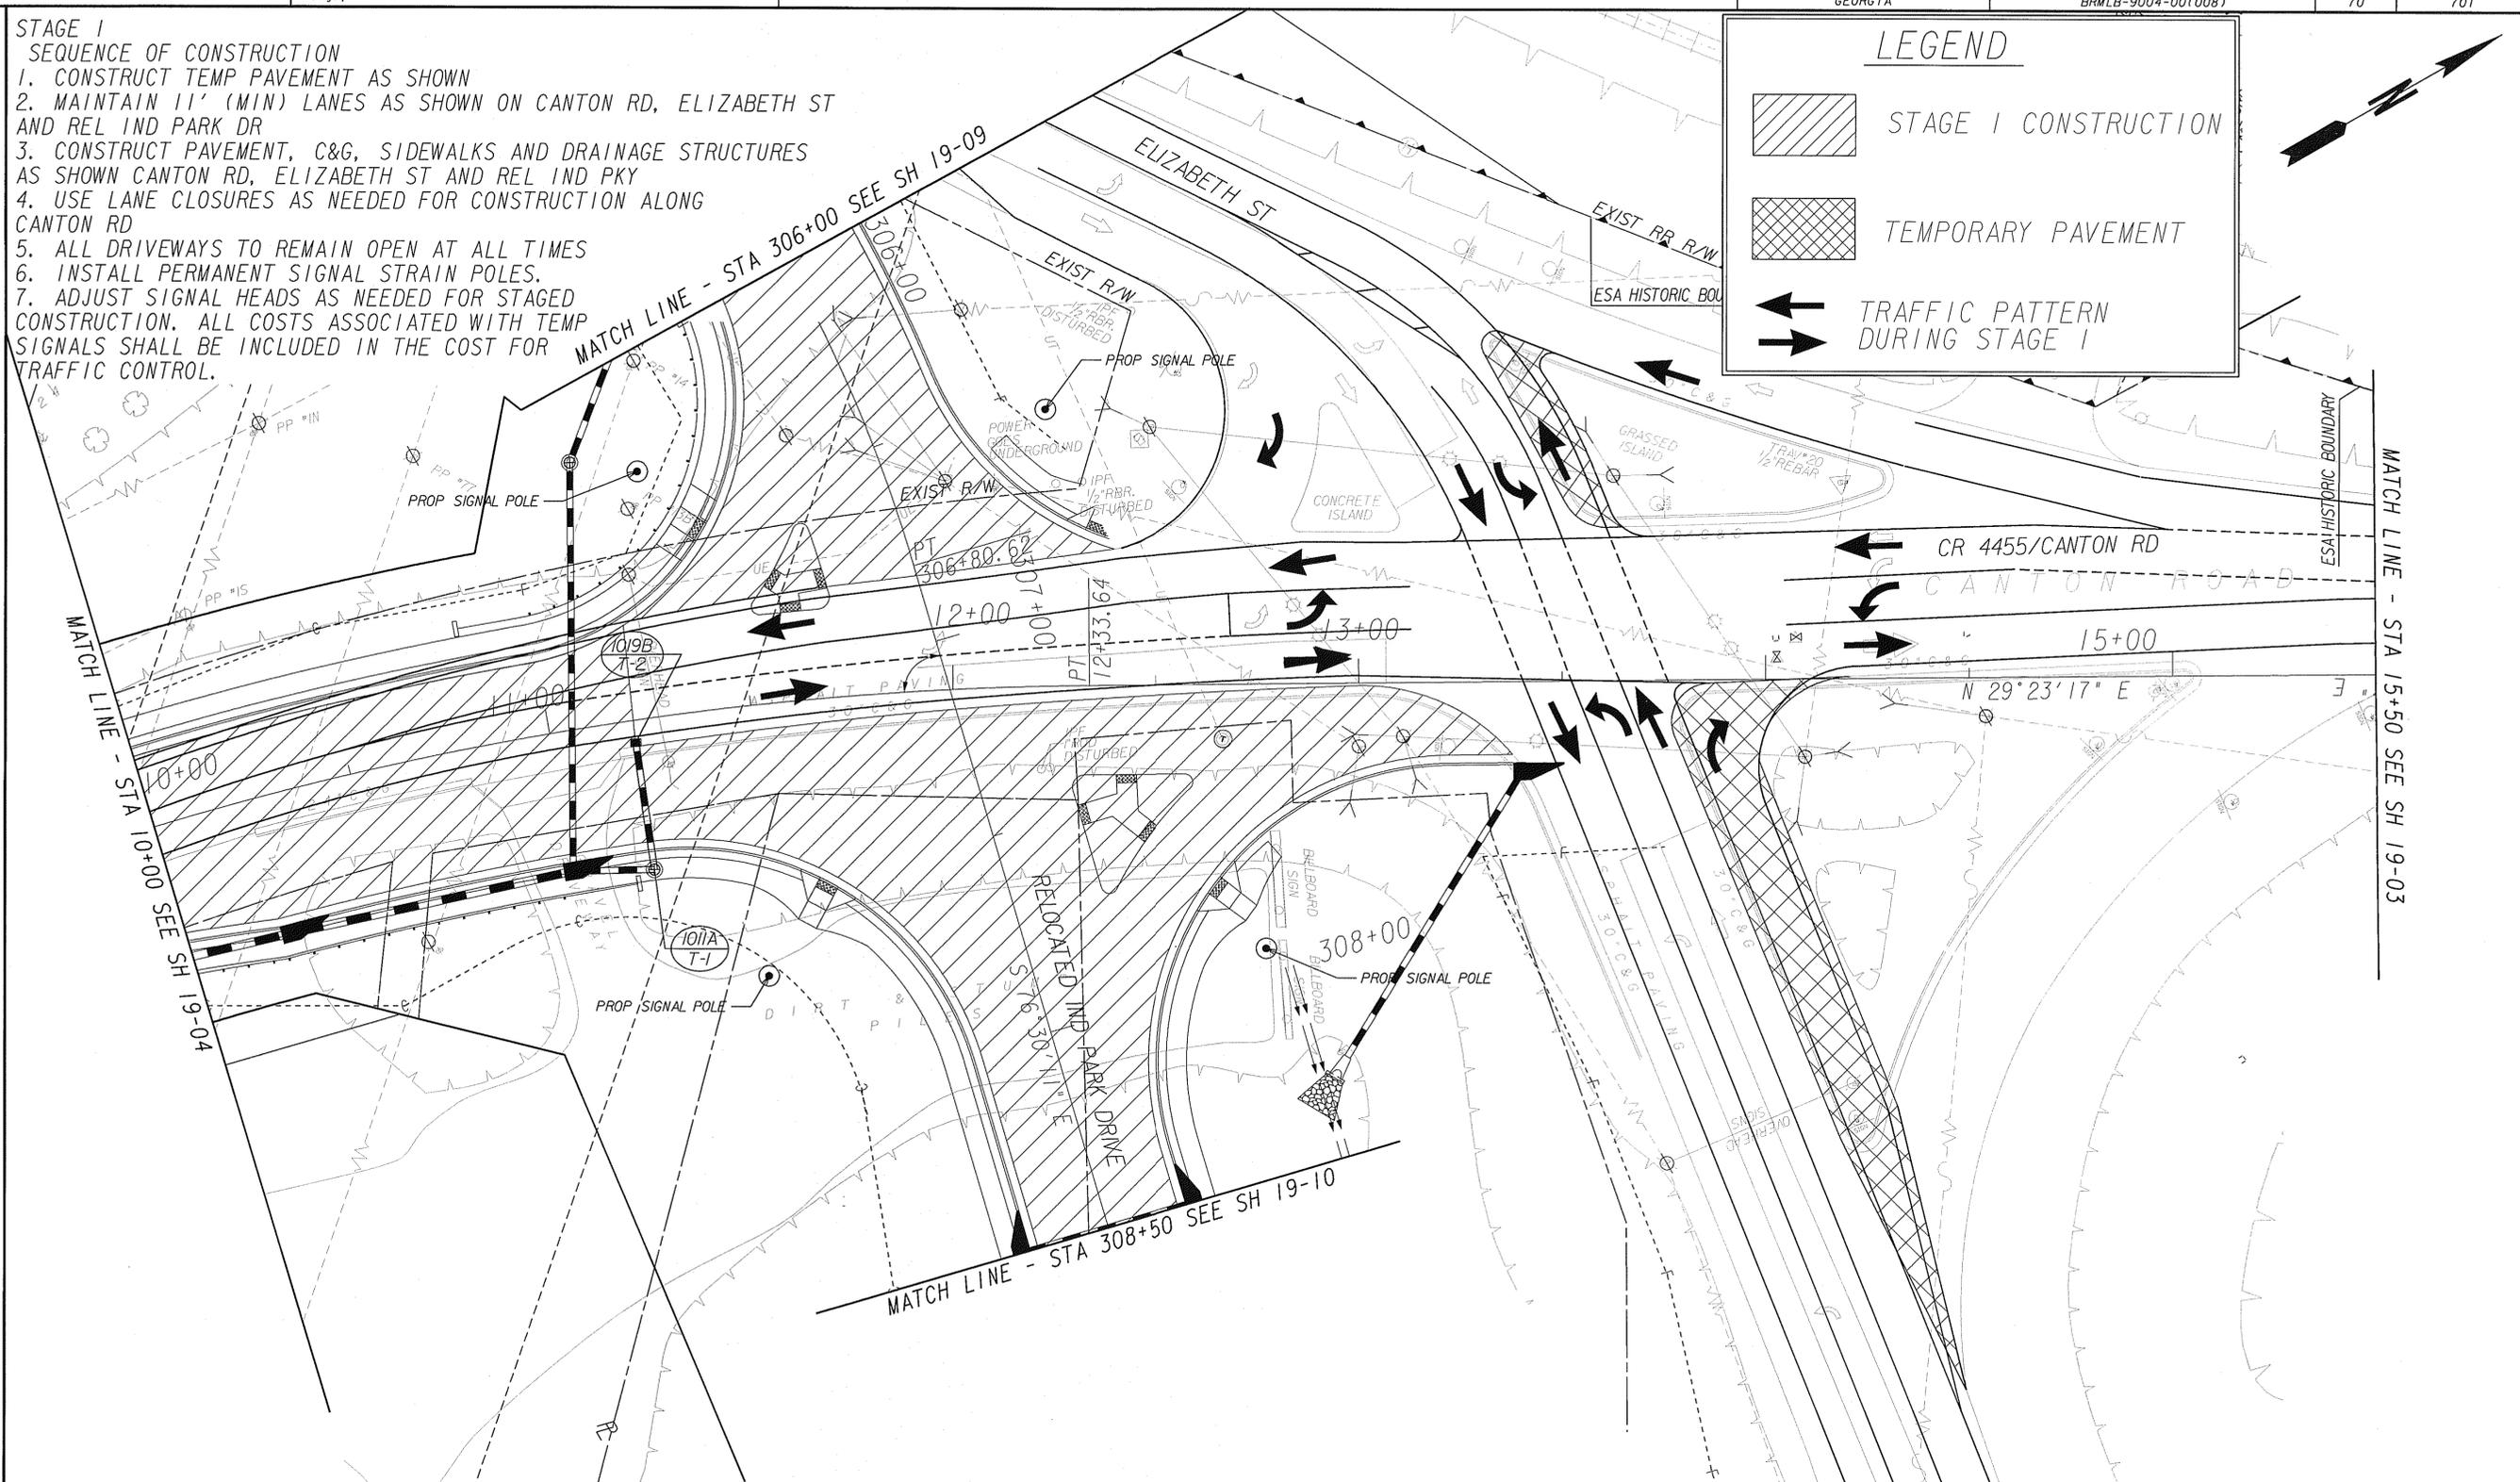


- STAGE 1 SEQUENCE OF CONSTRUCTION**
1. CONSTRUCT TEMP PAVEMENT AS SHOWN
 2. MAINTAIN 11' (MIN) LANES AS SHOWN ON CANTON RD, ELIZABETH ST AND REL IND PARK DR
 3. CONSTRUCT PAVEMENT, C&G, SIDEWALKS AND DRAINAGE STRUCTURES AS SHOWN CANTON RD, ELIZABETH ST AND REL IND PKY
 4. USE LANE CLOSURES AS NEEDED FOR CONSTRUCTION ALONG CANTON RD
 5. ALL DRIVEWAYS TO REMAIN OPEN AT ALL TIMES
 6. INSTALL PERMANENT SIGNAL STRAIN POLES.
 7. ADJUST SIGNAL HEADS AS NEEDED FOR STAGED CONSTRUCTION. ALL COSTS ASSOCIATED WITH TEMP SIGNALS SHALL BE INCLUDED IN THE COST FOR TRAFFIC CONTROL.


LEGEND

- [Hatched Box] STAGE I CONSTRUCTION
- [Cross-hatched Box] TEMPORARY PAVEMENT
- [Double Arrow] TRAFFIC PATTERN DURING STAGE I



PROPERTY AND EXISTING R/W LINE	—#—
REQUIRED R/W LINE	—G—F—
CONSTRUCTION LIMITS	—G—F—
EASEMENT FOR CONSTR & MAINTENANCE OF SLOPES	[Hatched Box]
EASEMENT FOR CONSTR OF SLOPES	[Cross-hatched Box]
EASEMENT FOR CONSTR OF DRIVES	[Cross-hatched Box]

BEGIN LIMIT OF ACCESS.....BLA
 END LIMIT OF ACCESS.....ELA
 LIMIT OF ACCESS
 REQ'D R/W & LIMIT OF ACCESS



REVISION DATES	

STATE OF GEORGIA
 DEPARTMENT OF TRANSPORTATION
CONSTRUCTION STAGING PLAN
STAGE I
 CANTON ROAD AND RR
 BRIDGE OVER SR 3/US 41

DRAWING No.
19-05