


STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	NHS-M000-00 (436)	32	50

CONSTRUCTION SEQUENCE

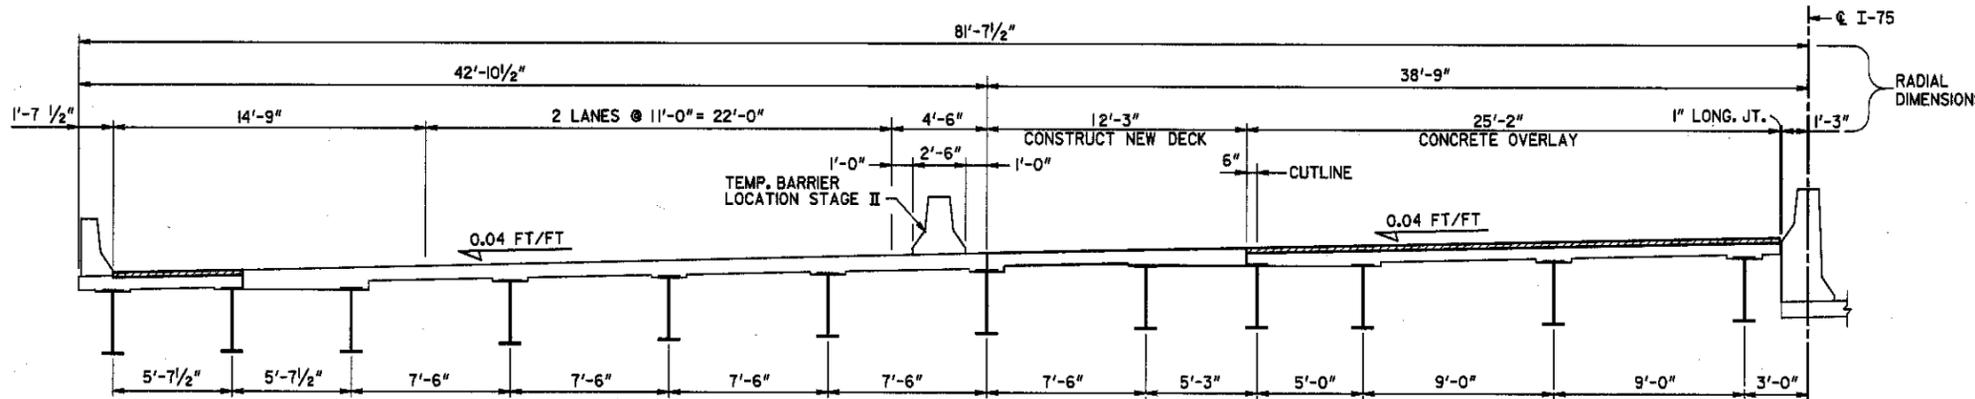


STAGE II:

1. MOVE TEMPORARY BARRIER TO LOCATION II, SHIFT AND MAINTAIN TWO 11'-0" LANES OF TRAFFIC ON THE LEFT BRIDGE AND TWO 11'-0" LANES OF TRAFFIC ON THE RIGHT BRIDGE.
2. REMOVE EXISTING ASPHALT OVERLAY ON SECTION OF DECK TO REMAIN.
3. REMOVE PORTIONS OF EXISTING DECK SLAB AND EDGE BEAMS AS NECESSARY FOR STAGE II CONSTRUCTION.
4. CONSTRUCT STAGE II NEW DECK SLAB, EDGE BEAMS, AND ENDWALL CHAMFERS TO MATCH EXISTING ASPHALT ELEVATION AND RESEAL EXISTING DECK JOINTS.
5. OVERLAY THE REMAINING DECK TO MATCH NEW DECK ELEVATION.

NOTE: THE ABOVE SEQUENCE SHALL BE COORDINATED WITH ROADWAY OPERATIONS. ***SEE ROADWAY PLANS*** IN LIEU OF THE ABOVE CONSTRUCTION SEQUENCE, THE CONTRACTOR MAY SUBMIT, FOR APPROVAL BY THE ENGINEER, HIS OWN CONSTRUCTION SEQUENCE.

NOTES

1. BEAM SPACINGS ARE THEORETICAL DIMENSIONS AT C BENT OR B.F.P.R. MEASURED ALONG RADIAL LINES BETWEEN CONCENTRIC CIRCLES.

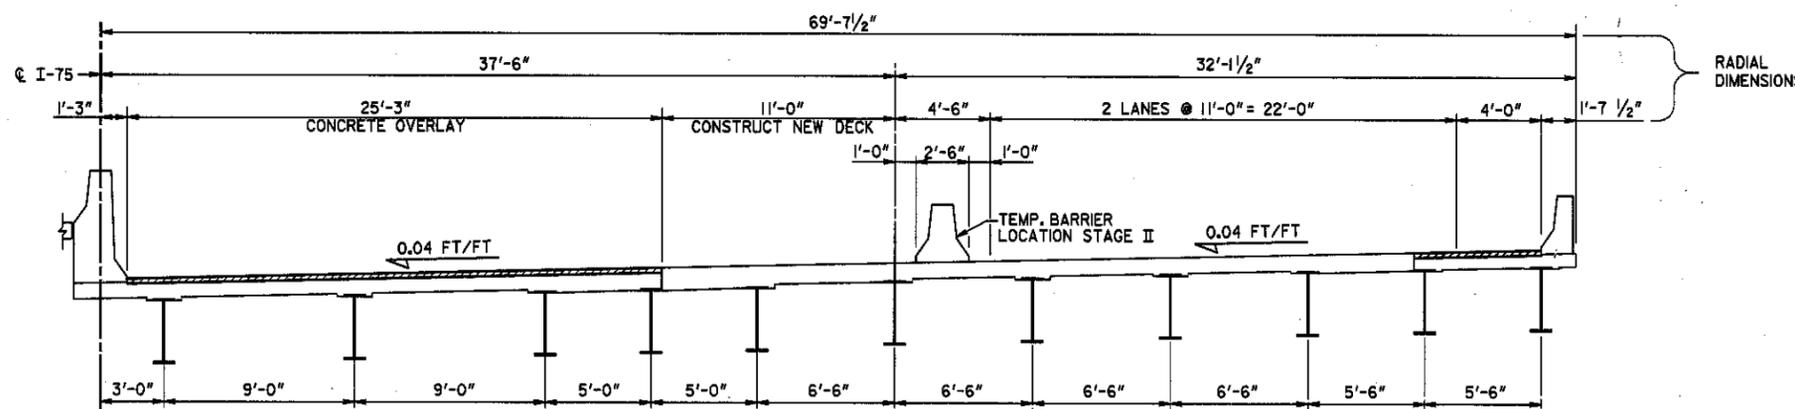

**STAGE II
(LOOKING AHEAD)**

BRIDGE NO. 1 LT. & RT.

JBT J.B. Trimble, Inc.
6445 Powers Ferry Road
Atlanta GA 30339-2933
(770) 952-1022

GEORGIA
DEPARTMENT OF TRANSPORTATION
OPERATIONS DIVISION-OFFICE OF MAINTENANCE

DISTRICT 6 BRIDGE REPAIRS (DECK REHABILITATION)

I-75 OVER S.R. 3

WHITFIELD COUNTY NHS-M000-00 (436)

SCALE: AS SHOWN

AUGUST 2001



10-01-01

BRIDGE SHEET
3 OF 6

DATE	
REVISIONS	
BY	

DESIGNED: PJC	CHECKED: GLE	REVIEWED: EHG
DRAWN: ITD	DESIGN GROUP: MAINTENANCE	APPROVED: STH