
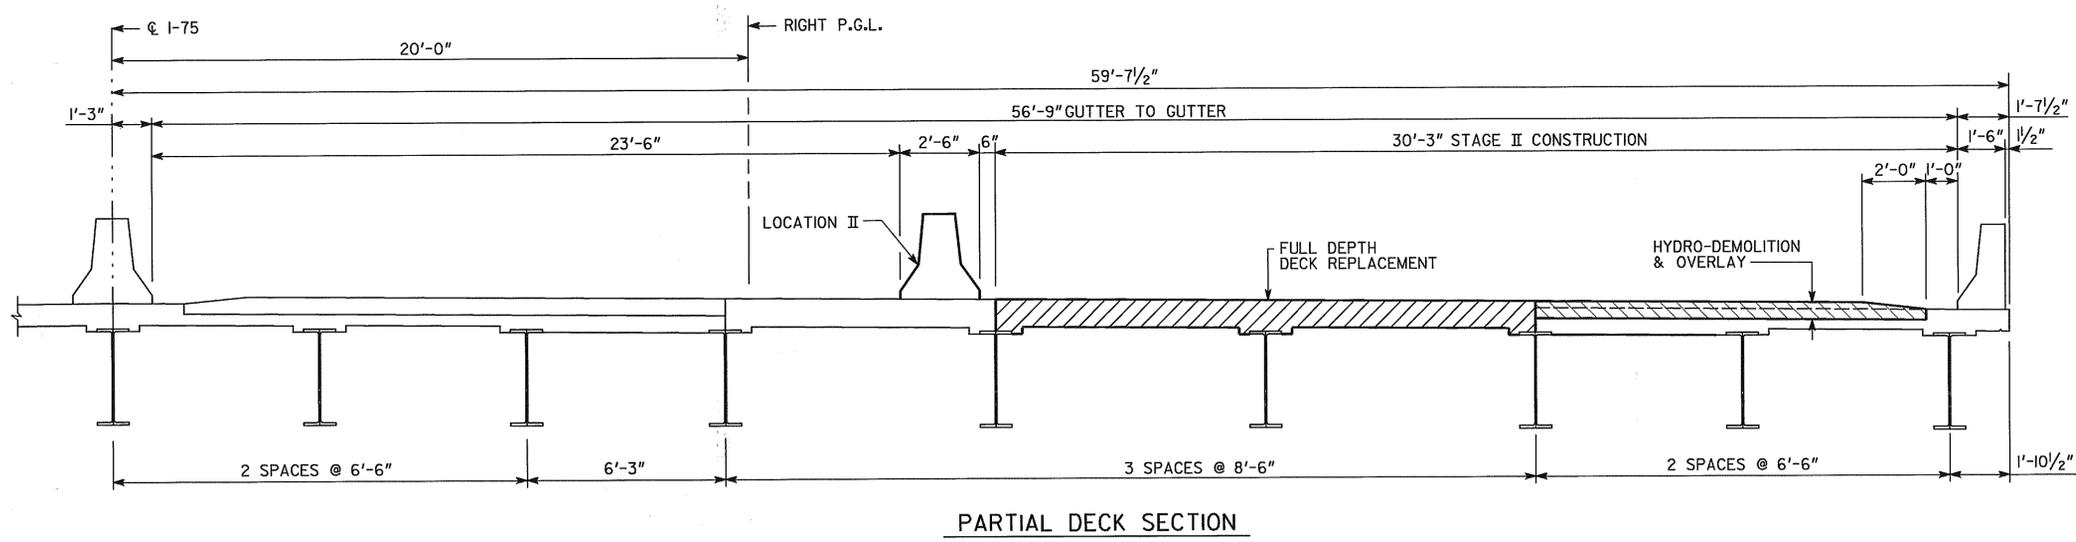


STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	NHS-M001-00 (993)	78	110

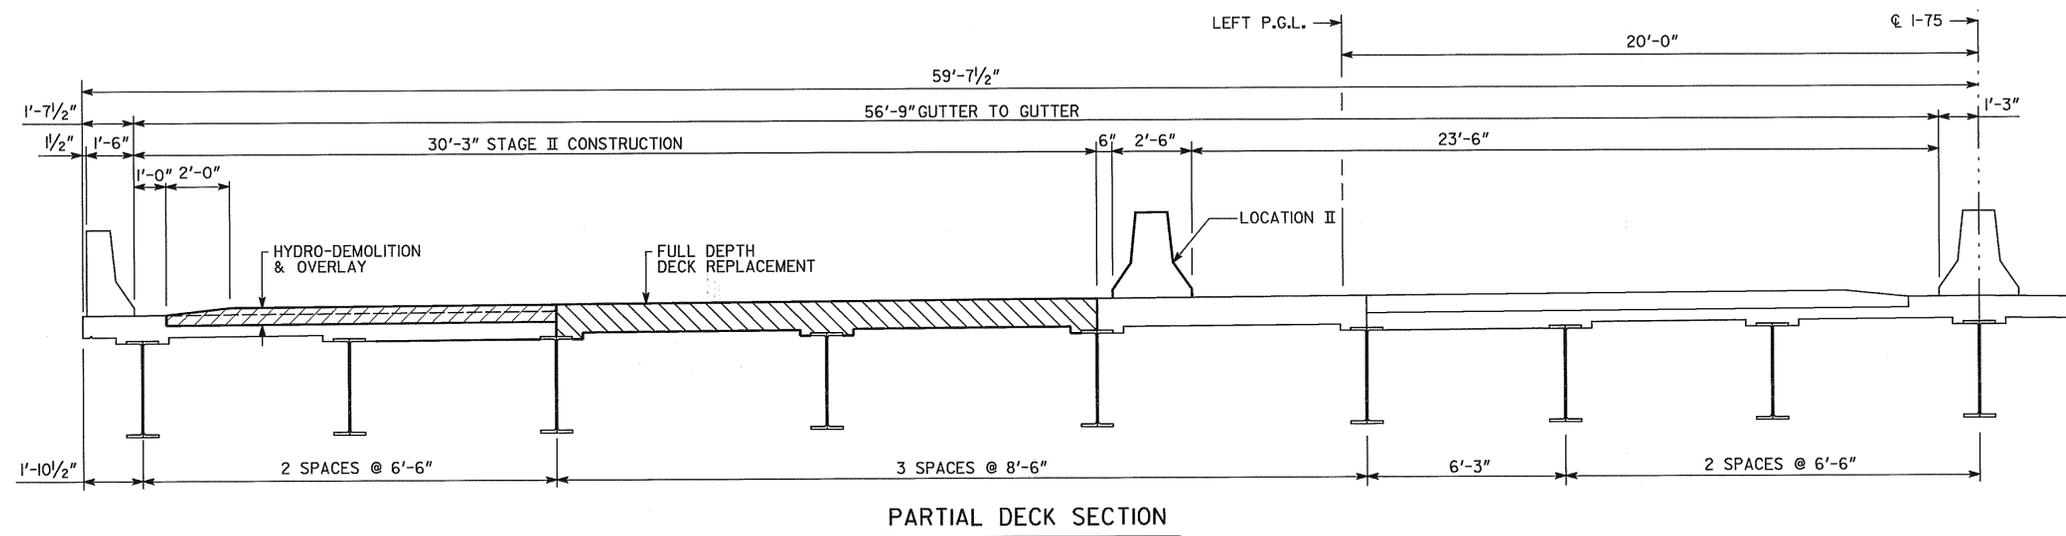

CONSTRUCTION SEQUENCE

STAGE II:

1. PLACE TEMPORARY BARRIER AT LOCATION II. MAINTAIN TWO 11'-0" LANES OF TRAFFIC ON THE LEFT BRIDGE AND TWO 11'-0" LANES OF TRAFFIC ON THE RIGHT BRIDGE.
2. REMOVE PORTIONS OF EXISTING DECK SLAB AS NECESSARY FOR STAGE II CONSTRUCTION.
3. CONSTRUCT STAGE II NEW DECK SLAB AND ENDWALL CHAMFERS.
4. PERFORM HYDRO-DEMOLITION AND OVERLAY OF THE REMAINING DECK.
5. RESEAL EXISTING DECK JOINTS.

NOTE: THE ABOVE SEQUENCE SHALL BE COORDINATED WITH ROADWAY OPERATIONS. SEE ROADWAY PLANS IN LIEU OF THE ABOVE CONSTRUCTION SEQUENCE. THE CONTRACTOR MAY SUBMIT, FOR APPROVAL BY THE ENGINEER, HIS OWN CONSTRUCTION SEQUENCE.

BRIDGE NO. 6

JBT	J.B. TRIMBLE, INC.	
	6445 Powers Ferry Rd. Atlanta GA 30339 (770) 952-1022	
GEORGIA DEPARTMENT OF TRANSPORTATION OPERATIONS DIVISION-OFFICE OF MAINTENANCE		
DISTRICT 4 BRIDGE REPAIR (DECK REHABILITATION) I-75 OVER S.R. 7 (U.S. 41) CONSTRUCTION SEQUENCE - STAGE II TIFT COUNTY		
SCALE: AS SHOWN		NOVEMBER 2003
DESIGNED: PJC	CHECKED: GLE	REVIEWED: EHG
DRAWN: ITD	DESIGN GROUP: MAINTENANCE	APPROVED: STH

REVISIONS	DATE

BRIDGE SHEET
3 OF 5