COUNTY	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
TIFT	NHS00-0000-00(765)	357	562

DETAILS & CLEARANCE DIAGRAM FOR OVERHEAD SIGNS

STRUCTURAL SUPPORT # C542

STA. 1216+37
I-75 NB

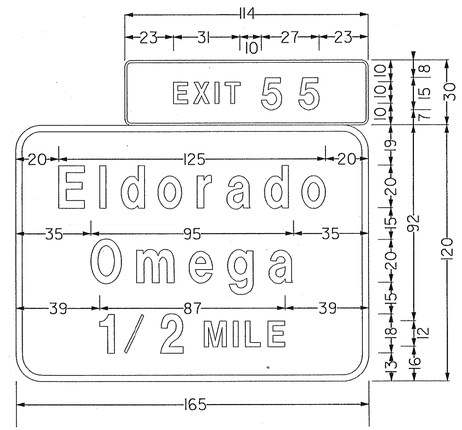

SPECIAL #102

3" Radius, 1" Border, White on Green
"EXIT" E Mod. ; "55" E Mod. ;
12" Radius, 3" Border, White on Green;
"Eldorado" E Mod.; "Omega" E Mod.; "1/2" E Mod.;
"MILE" E Mod. Georgia

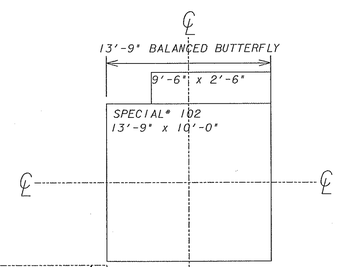

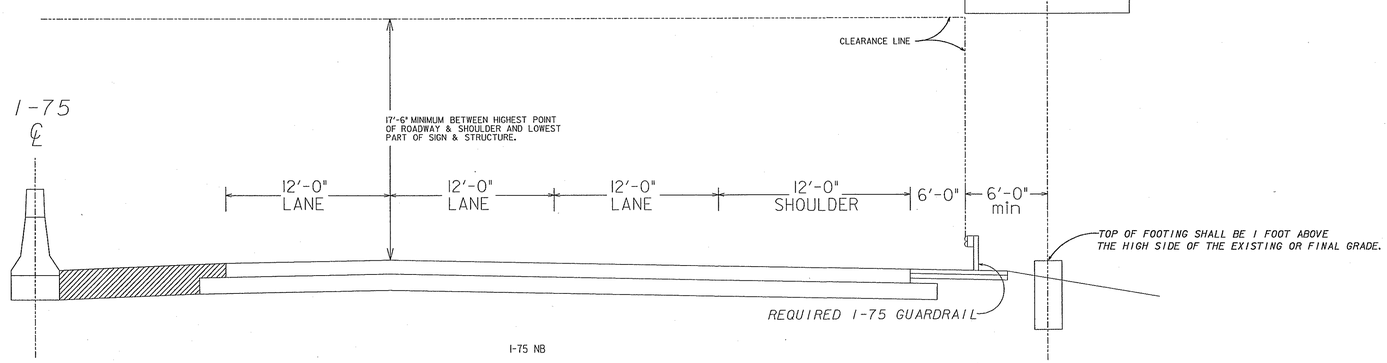

I-75 NB

STRUCTURAL SUPPORT	TYPE III
DESIGN SIGN AREA	137.5
DESIGN WIND VELOCITY	PER A.A.S.H.T.O. SPECS.
HEIGHT ABOVE GENERAL	
GROUND ELEVATION	15' - 30'
STRUCTURE LENGTH	12'-0"

PLANS PREPARED AND SUBMITTED BY:

AEI

Branch Offices
○ 65 Aberdeen Drive, Glasgow, KY 42141, (270) 651-7220
● 1534 White Circle, Suite 101, Marietta, GA 30066, (770) 421-8422
○ 2500 Nelson Miller Parkway, Louisville, KY 40223, (502) 245-3813

AMERICAN ENGINEERS, INC.
www.aei.co
DESIGN CONSULTANT
PROFESSIONAL ENGINEERING

- NO SCALE -

REVISION DATES

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: TRAFFIC SAFETY & DESIGN
SIGNING AND MARKING PLANS

DETAILS & CLEARANCE DIAGRAM FOR OVERHEAD SIGNS

DRAWING No. 26-35

...\0000765\DGN\0000765smcd102.dgn 3/1/2011 8:28:10 AM