




DIVIDED / UNDIVIDED HIGHWAY




REVERSIBLE LANE

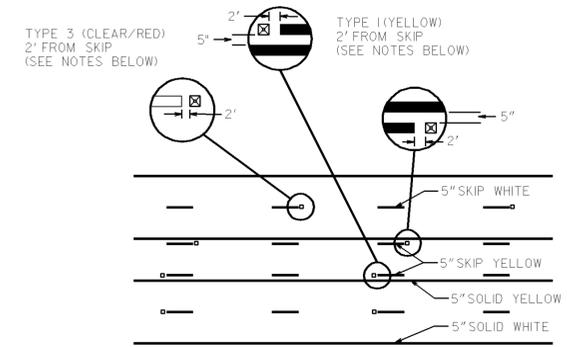

TWO WAY LEFT TURN LANE

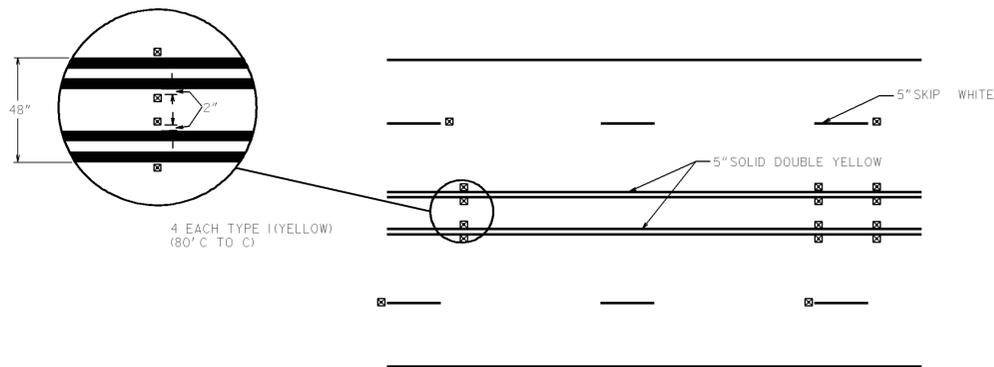

4'-0" STRIPED FLUSH MEDIAN

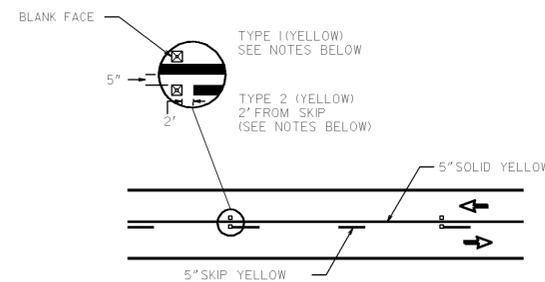

NO PASSING ZONE

GENERAL NOTES:

1. RAISED PAVEMENT MARKERS SHALL BE SPACED EVERY 80 FT UNLESS OTHERWISE SPECIFIED.
2. ON SOLID WHITE TURN BAY LINES, SPACING SHALL BE 20 FT.
3. RAISED PAVEMENT MARKERS SHALL BE OFFSET 5 INCHES FROM SOLID LANE LINES.
4. CLEAR FACE OF TYPE 3 RAISED PAVEMENT MARKERS SHALL BE ORIENTED TOWARD ONCOMING TRAFFIC.
5. ON HORIZONTAL CURVES WHERE AT LEAST 3 MARKERS CANNOT BE SEEN AT ONE TIME USING NORMAL SPACING, MARKERS SHALL BE PLACED 40 FT.

**GEORGIA**  
DEPARTMENT  
OF  
TRANSPORTATION

- NO SCALE -

DATE	REVISIONS
9/4/03	NO PASSING ZONE RPM'S
1/13/04	NO PASSING ZONE RPM'S
1/18/05	CHANGED BORDER

STATE OF GEORGIA  
DEPARTMENT OF TRANSPORTATION  
OFFICE: TRAFFIC SAFETY & DESIGN  
**SIGNING AND MARKING PLANS**  
DETAILS OF RAISED PAVEMENT  
MARKER LOCATION NON-LIMITED  
ACCESS ROADWAY  
JANUARY 2000

NUMBER  
T-15A