STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	EDS-19(50)	1	29

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

RIGHT OF WAY PLAN

U.S.19 IMPROVEMENTS / SUMTER COUNTY

EDS-19(50) & BRN-006-3(11)
SUMTER COUNTY

FEDERAL ROUTE 19
STATE ROUTE 3
P.I. NO.322195 & 322310

PROJECT MIDPOINT
STATION 181+53
N 709331.6708
E 2268994.4388

LOCATION MAP

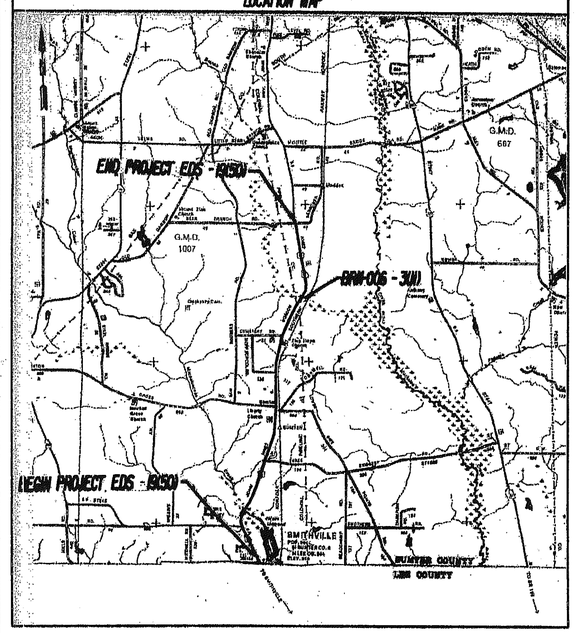

SURVEY AND COORDINATE DATA
HORIZ.DATUM: N.AMERICAN DATUM OF - (NAD 83/1994)
VERT.DATUM: N.AMERICAN VERTICAL DATUM OF - (NAVD 088)
COORDINATE ZONE: GEORGIA WEST (1002)
PROJECT UNITS: ENGLISH

DESIGN DATA:
TRAFFIC A.D.T.: (2009) 4900
TRAFFIC A.D.T.: (2029) 7400
TRAFFIC D.H.V.:
DIRECTIONAL DIST.: 50/50
% TRUCKS: 11%
24 HR.TRUCKS %: 12%
SPEED DESIGN: 65MPH
FUNCTIONAL CLASSIFICATION: RURAL PRINCIPAL ARTERIAL

NOTE :
ALL REFERENCES IN THIS DOCUMENT, WHICH INCLUDES ALL PAPERS, WRITINGS, DOCUMENTS, DRAWINGS, OR PHOTOGRAPHS USED, OR TO BE USED IN CONNECTION WITH THIS DOCUMENT, TO " STATE HIGHWAY DEPARTMENT OF GEORGIA ", "STATE HIGHWAY DEPARTMENT ", GEORGIA STATE HIGHWAY DEPARTMENT ", " HIGHWAY DEPARTMENT ", OR " DEPARTMENT " WHEN THE CONTEXT THEREOF MEANS THE STATE HIGHWAY DEPARTMENT OF GEORGIA MEAN, AND SHALL BE DEEMED TO MEAN THE DEPARTMENT OF TRANSPORTATION.

THE DATA, TOGETHER WITH ALL OTHER INFORMATION SHOWN ON THESE PLANS OR IN ANYWAY INDICATED THEREBY, WHETHER BY DRAWINGS OR NOTES, OR IN ANY OTHER MANNER, ARE BASED UPON FIELD INVESTIGATIONS AND ARE BELIEVED TO BE INDICATIVE OF ACTUAL CONDITIONS. HOWEVER, THE SAME ARE SHOWN AS INFORMATION ONLY, ARE NOT GUARANTEED, AND DO NOT BIND THE DEPARTMENT OF TRANSPORTATION IN ANY WAY. THE ATTENTION OF BIDDER IS SPECIFICALLY DIRECTED TO SUBSECTIONS 102.04, 102.05, AND 104.03 OF THE STANDARD SPECIFICATIONS.

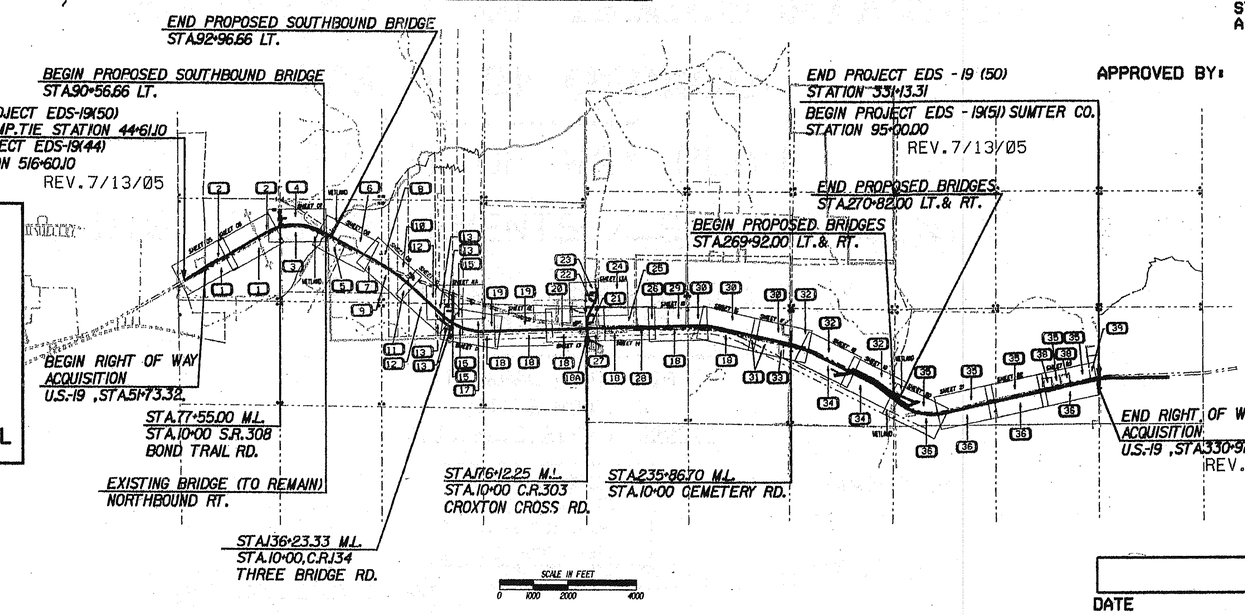

LENGTH OF PROJECT EDS-19(50) BRN-006-3(11)	COUNTY NO. 129
	MILES
NET LENGTH OF R/W ACQUISTION	5.31
NET LENGTH OF BRIDGE	0.017
GROSS LENGTH OF EXCEPTIONS	0.00
GROSS LENGTH OF R/W ACQUISTION	5.31

EDS-19(50) & BRN-006-3(11), SUMTER CO.

CONVENTIONAL SIGNS

STATE OR COUNTY LINE
CITY LIMIT LINE
PROPERTY LINE
SURVEY OR BASE LINE
RIGHT OF WAY LINE: EXISTING / REQUIRED / LIMIT OF ACCESS / R/W & LIMIT OF ACCESS / R/W MARKER
FENCE
RAILROADS
POWER LINE
TELEPHONE LINE
POWER POLES
TELEPHONE OR TELEGRAPH POLES

Y.5.A

PROJECT LOCATION AND DESIGN APPROVAL DATE:

THIS PROJECT IS LOCATED 100% IN CONGRESSIONAL DISTRICT 2

THIS PROJECT IS LOCATED 100% IN SUMTER COUNTY (NO.129)

THIS PROJECT IS DESIGNATED AS STATE FUNDED

PREPARED BY: IBRAHIM S. ABOUSAUD, P.E.
STONE & WEBSTER INC.
A SHAW GROUP

APPROVED BY: Terry McCollister
TERRY McCOLLISTER,
STATE HIGHWAY RIGHT - OF - WAY ADMINISTRATOR

LAND DISTRICT 16

LAND LOT NUMBERS
38,39,40,41,42,56,57,60,61,62,63

GMD NUMBERS
NONE

GEORGIA No. 21696 PROFESSIONAL ENGINEER
Ibrahim S. Abousaud 5/17/2004

Y.5.A

DATE CHIEF ENGINEER

PLANS COMPLETED 2-13-2004	10A,11,11A,11B,13,13A,14,15,17,19,20,
REVISIONS	21,22,&23
11-22-04 REV. SHT. 1, 20	05-23-05 REV. SHT. 1, 2,3,4,6,8,10,
01-25-05 REV. SHTS 1, 7,9,11A,15,17,	10A,11,11B,12,13,14,15,16,17,19,21,&22
18,19,20,21,22,& 23	06-22-05 REV. SHT. 1,
04-11-05 REV. SHT. 1,17,18,19,21,22,	07-13-05 REV. SHT. 1,3,14,15,
& 23	09-19-05 REV. SHT. 1,4,18,19,20
04-25-05 REV. SHT. 1, 11, & 11A	01-23-06 REV. SHT. 1,3,13,13A
05-08-05 REV. SHT. 1, 17,18, & 19	03-23-06 REV. SHT.1,2,3,4,7,13,14,22,
05-18-05 REV. SHT. 1, 5,6,7,8,9,10,	08-03-06 REV. SHT.1,3,4,15,17,18,19,
09-18-08 REV. SHT. 1,13	08-22-06 REV. SHT.1,23

SHOWDATETIME$$$$$$
DGN$SPECIFICATION$$$$$$$$$$$$$$$$$$$$$$