B-61

STATE	PROJECT NUMBER	SHEET No.	TOTAL SHEETS
GA.	BRZLB - 077 (19)	1	41

REV. 6/10/94
REV. 6/24/94

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

PLAN AND PROFILE OF PROPOSED
BRIDGE REPLACEMENT
TURKEY CREEK ROAD OVER TURKEY CREEK

COWETA COUNTY
BRZLB - 077 (19)

FEDERAL ROUTE # NONE
STATE ROUTE # NONE
COUNTY ROAD # 122
P.I. # 370834

INDEX

	DESCRIPTION
1	COVER SHEET
2	REVISION SUMMARY
3	TYPICAL SECTION
4	SUMMARY OF QUANTITIES
5	DETAILED ESTIMATE
6	PLAN AND PROFILE
7	DETAIL OF DETOUR SIGNING
8	DRAINAGE AREA MAP
9	BORROW PIT LOCATION MAP (-)
10-15	BRIDGE PLANS - BRIDGE OVER TURKEY CREEK
16	CONSTR. DETAIL - TEMPORARY SILT FENCE/BALED STRAW (6-90)
17	CONSTR. DETAIL - TYPICAL LOCATION DETAILS (5-93)
18	CONSTR. DETAIL - FOR EROSION AND SEDIMENT CONTROL (3-91)
19	CONSTR. DETAIL - SERRATED SLOPE / BENCHING DETAILS (1-82)
20	CONSTR. DETAIL - GRADED SHOULDER WIDTHS (11-88)
21	CONSTR. DETAIL - SUBBASES FOR APPROACH SLABS (6-88)
22	GA. STD. 3054 - END POST / END POST GUARDRAIL ATTACHMENT (5-89)
23	GA. STD. 3901 - BAR BENDING DETAILS (8-69)
24	GA. STD. 4010 - "W" BEAM GUARDRAIL (12-89)
25	GA. STD. 4011A - POST AND OFFSET BLOCKS FOR "W" BEAM GUARDRAIL (9-91)
26	GA. STD. 4012C - GUARDRAIL ANCHORAGE TYPE 1 (4-90)
27	GA. STD. 4050 - GUARDRAIL ANCHORAGE TYPE 9 (11-92)
28	GA. STD. 4052 - GUARDRAIL LOCATION DETAILS (4-90)
29	GA. STD. 4270 - "T" BEAM GUARDRAIL(12-89)
30	GA. STD. 9003 - RIGHT OF WAY MARKERS (9-90)
31	GA. STD. 9017J - CONCRETE SPILLWAYS (4-89)
32	GA. STD. 9017Q - REINF. CONC. APPROACH SLAB (2-90)
33	GA. STD. 9028C - SUPERELEVATION (1-90)
34	GA. STD. 9031T - FLARE DETAILS AT BRIDGE ENDS (5-89)
35	GA. STD. 9037 - TYP. FILL DETAIL AT END OF BRIDGE (4-86)
36	GA. STD. 9039 - PERMANENT TIMBER TYPE BARRICADE (12-91)
37-41	EARTHWORK CROSS SECTIONS
41	TOTAL SHEETS

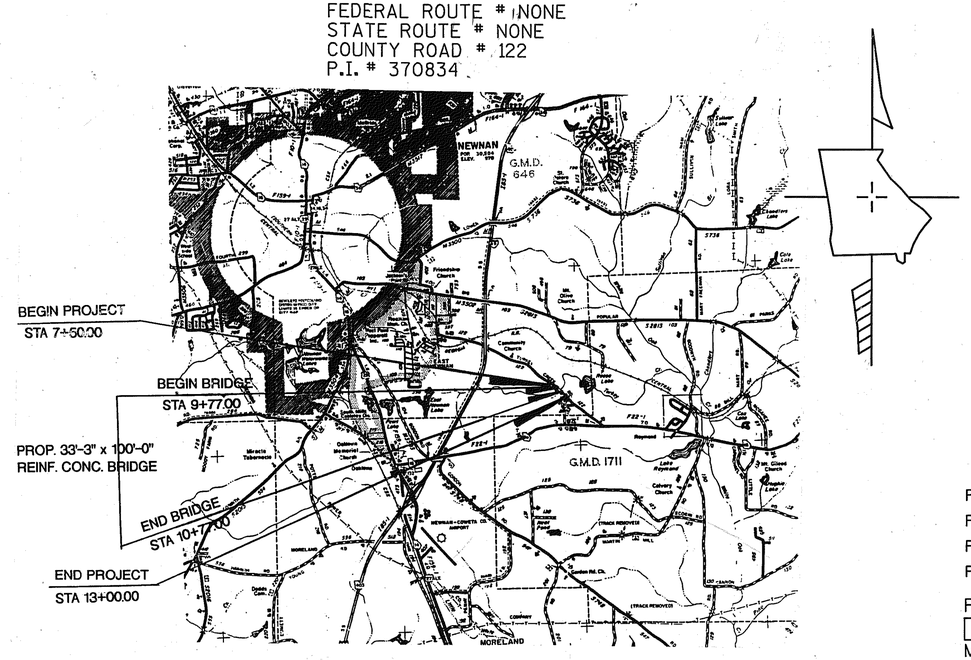

SCALE : 1 INCH = 1 MILE

ALL REFERENCES IN THIS DOCUMENT, WHICH INCLUDES ALL PAPERS, WRITINGS, DOCUMENTS, DRAWINGS, OR PHOTOGRAPHS USED , OR TO BE USED, IN CONNECTION WITH THIS DOCUMENT, TO STATE HIGHWAY DEPARTMENT OF GEORGIA, STATE HIGHWAY DEPARTMENT, GEORGIA STATE HIGHWAY DEPARTMENT, HIGHWAY DEPARTMENT, OR DEPARTMENT WHEN THE CONTEXT THEREOF MEANS THE STATE HIGHWAY DEPARTMENT OF GEORGIA MEAN, AND SHALL BE DEEMED TO MEAN, THE DEPARTMENT OF TRANSPORTATION.

THE DATA, TOGETHER WITH ALL OTHER INFORMATION SHOWN ON THESE PLANS, OR IN ANYWAY INDICATED THEREBY, WHETHER BY DRAWINGS OR NOTES, OR IN ANY OTHER MANNER, ARE BASED UPON FIELD INVESTIGATIONS AND ARE BELIEVED TO BE INDICATIVE OF ACTUAL CONDITIONS. HOWEVER, THE SAME ARE SHOWN AS INFORMATION ONLY, ARE NOT GUARANTEED, AND DO NOT BIND THE DEPARTMENT OF TRANSPORTATION IN ANY WAY. THE ATTENTION OF THE BIDDER IS SPECIFICALLY DIRECTED TO SECTIONS 102.04, 102.05 AND 104.03 OF THE STANDARD SPECIFICATIONS, OF THE DEPARTMENT OF TRANSPORTATION OF THE STATE OF GEORGIA FOR THE CONSTRUCTION OF ROADS AND BRIDGES, CURRENT EDITIONS AND SUPPLEMENTS THERETO, WHICH WILL BE A PART OF THIS CONTRACT.

NOTE: THIS ROAD TO BE CLOSED DURING CONSTRUCTION.

PROJECT DESIGNATION:EXEMPT

GEORGIA REGISTERED PROFESSIONAL ENGINEER No. 14198 WILLIAM E. JORDAN
10-15-93

Moreland Altobelli Associates, Inc.
3290 Cumberland Club Drive
Atlanta, Georgia 30339
Tel.: 404 - 435-6000

FUNCTIONAL CLASSIFICATION = RURAL LOCAL ROAD

NOTE: ALL WORK TO BE DONE IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS OF THE DEPARTMENT OF TRANSPORTATION OF GEORGIA, CURRENT EDITION SUPPLEMENTS THERETO, APPROVED BY FEDERAL HIGHWAY ADMINISTRATION AND REVISIONS SUBMITTED FOR PROJECT.

TRAFFIC DESIGN DATA

1990 ADT	=	390 VPD
2011 ADT	=	600 VPD
K	=	10%
D	=	60%
T	=	1%
24 HR. T	=	3%
DESIGN SPEED	=	45 MPH

BRZLB-077(19) COWETA — COUNTY NO. 077
P. I. NO. 370834 — NO. CR 122

LENGTH OF PROJECT	MILES
NET LENGTH OF ROADWAY	0.085
NET LENGTH OF BRIDGES	0.019
NET LENGTH OF PROJECT	0.104
NET LENGTH OF EXCEPTIONS	0.000
GROSS LENGTH OF PROJECT	0.104

THIS PROJECT IS LOCATED 100% IN CONGRESSIONAL DISTRICT NO. 3.
THIS PROJECT IS LOCATED 100% IN COWETA COUNTY.

PLANS COMPLETED 10-15-93
PLANS REVISED JANUARY 4, 1994, JANUARY 25, 1994, FEBRUARY 8, 1994
PLANS REVISED FEBRUARY 10, 1994, FEBRUARY 14, 1994, MARCH 3, 1994
PLANS REVISED MARCH 9, 1994 MARCH 15, 1994, JUNE 6, 1994, JUNE 24, 1994, 10-21-94,

PREPARED BY: Aruna Sastry P.E. — DATE 10-15-93
MORELAND ALTOBELLI & ASSOCIATES, INC.

SUBMITTED BY: Joseph C. Lewis P.E. — DATE 10-24-93
DISTRICT PRECONSTRUCTION ENGINEER

RECOMMENDED FOR APPROVAL: D. H. Echemendia — DATE 10-28-93
DISTRICT ENGINEER

APPROVED: Frank Danielsen — DATE 10-28-93
CHIEF ENGINEER

BRZLB - 077 (19) COWETA COUNTY

c:\dgn\93974\June.dgn Oct. 1, 1993 10:48:32

6/18/2008 8:52:31 AM \\GDOT-DSN1\GOPLOT\GCF\Road Design Tiff-18x12 to Tiff-36x24.gcf gsanford Y:\370834-\Construction\370834 0001.tif GO-RD14