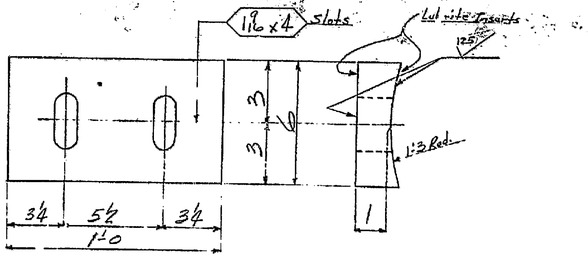

Lubrite Pl 6x1 1/16x 1'-0 ~ SC1M1

Note:
Bronze Plates are to be as per A.S.T.M. Designation B22-61 Alloy B. with Trepanned Graphite inserts in both faces. Lubrite Process or equal.
Stick Lubricant to be furnished with Bronze Plates.

~~Shop Paint~~

ADVANCE BILL 101

LINE NO.	TOTAL NO. OF PCS. ON ORDER	MATERIAL: NO. OF PCS. ON SECTION	ABBRV. DESC.	DIMENSIONS	LENGTH FEET	LENGTH INCH	FINISH AND TRIM DESC.	FINISH AND TRIM INCH	SHIPPING OR ASSEMBLING MARK	SHIPPING SPECIFICATIONS OR ASSEMBLING REFERENCE	REMARKS	ORDERED	ITEM	CALCULATED WEIGHT FOR ONE SHIP PIECE
1														
2	20		Bronze Plates						SC1M1					
3	20	Lub	6	1 1/16	1	0								
4												11-14-759		
5														
6														
7	1	M	Lot of Lubricant						SC1L1					
8			For Bronze											
9														
10														
11														
12														
13														
14														
15														

FABRICATION Birmingham
DRAWING Roanoke
MADE BY CRM DATE 10-2-64
CHECKED BY MCA DATE 10/64
IN CHARGE OF Scott

REVISIONS: C, B, A, F, E, D

FAB. PLT. 11 SCD. CODE 1370
BAD | INCH | COST CENTERS PROD. NON PROD. | PAY BASIS CODE 01
WEIGHT REV. NO. | EXCEPTION SHIP DIVISION | LINE CONTROL 5

PAINT: None
CONTACT SURFACES: No
RIVETS:
HOLES: as noted
ORDER NO. V9804
SHEET NO. SC1

BRIDGE No. 5 SENOIA ROAD UNDERPASS
STATE HIGHWAY DEPT. OF GA. FULTON COUNTY, GA. ~ ROGERS BRIDGE Co. INC.
NAME OF STRUCTURE Sta. 722+37.75 Type 2

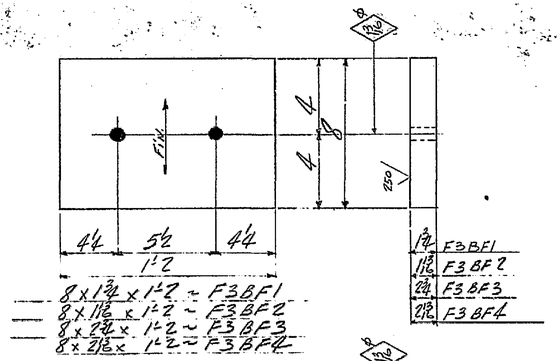

8 x 1 3/4 x 1'-2 ~ F3BF1
8 x 1 13/16 x 1'-2 ~ F3BF2
8 x 2 3/4 x 1'-2 ~ F3BF3
8 x 2 13/16 x 1'-2 ~ F3BF4

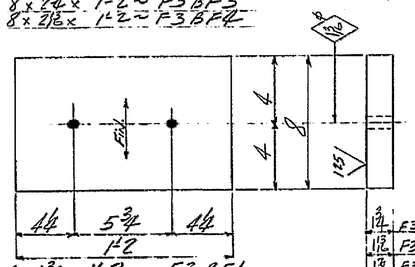

8 x 1 3/4 x 1'-2 ~ F3BE1
8 x 1 13/16 x 1'-2 ~ F3BE2
8 x 1 7/8 x 1'-2 ~ F3BE3

Paint Surfaces of BE1, BE2 and BE3 shall receive no paint or galvanizing.

Paint Note: Finished Surfaces of BF1, BF2, BF3 & BF4 to be given a shop coat of Hot white Lead and Tallow.

ADVANCE BILL 2

LINE NO.	TOTAL NO. OF PCS. ON ORDER	MATERIAL: NO. OF PCS. ON SECTION	ABBRV. DESC.	DIMENSIONS	LENGTH FEET	LENGTH INCH	FINISH AND TRIM DESC.	FINISH AND TRIM INCH	SHIPPING OR ASSEMBLING MARK	SHIPPING SPECIFICATIONS OR ASSEMBLING REFERENCE	REMARKS	ORDERED	ITEM	CALCULATED WEIGHT FOR ONE SHIP PIECE
1														
2		5	FLT	8 1 3/4	1	2	FIS		F3BF1				5	
3		5	FLT	8 1 13/16	1	2	FIS		F3BF2			1-50x1 13/16 D.S.O.	D.S.	
4		8	FLT	8 2 3/4	1	2	FIS		F3BF3			1-8 & 3 50/33	20	
5		2	FLT	8 2 13/16	1	2	FIS		F3BF4				55	
6														
7		3	FLT	8 1 3/4	1	2	FIS		F3BE1				5	
8		12	FLT	8 1 13/16	1	2	FIS		F3BE2			50x1 7/8 D.S.O.	D.S.	
9		5	FLT	8 1 7/8	1	2	FIS		F3BE3				55	
10														
11														
12														
13														
14														
15														

FABRICATION Birmingham
DRAWING Roanoke
MADE BY CRM DATE 10-1-64
CHECKED BY MCA DATE 10/64
IN CHARGE OF Scott

REVISIONS: C, B, A, F, E, D

FAB. PLT. 11 SCD. CODE 2721
BAD | INCH | COST CENTERS PROD. NON PROD. | PAY BASIS CODE 01
WEIGHT REV. NO. | EXCEPTION SHIP DIVISION | LINE CONTROL 7

PAINT: Yes except Fin. Surfaces (see note)
CONTACT SURFACES: —
RIVETS:
HOLES: as noted
ORDER NO. V9803
SHEET NO. F3

BRIDGE No. 4 BOHANNAN ROAD UNDERPASS
STATE HIGHWAY DEPT. OF GA. FULTON COUNTY, GA. ~ ROGERS BRIDGE Co. INC.
NAME OF STRUCTURE Sta. 74+14.88 Type 2

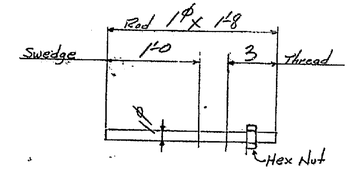

Anchor Bolt F2A1



FLT 3x4x4" F2W1

ADVANCE BILL 101-2

LINE NO.	TOTAL NO. OF PCS. ON ORDER	MATERIAL: NO. OF PCS. ON SECTION	ABBRV. DESC.	DIMENSIONS	LENGTH FEET	LENGTH INCH	FINISH AND TRIM DESC.	FINISH AND TRIM INCH	SHIPPING OR ASSEMBLING MARK	SHIPPING SPECIFICATIONS OR ASSEMBLING REFERENCE	REMARKS	ORDERED	ITEM	CALCULATED WEIGHT FOR ONE SHIP PIECE
1														
2														
3		80	RD	1	1	8			F2A1				5	
4		80	M	1 TAP STD HEX NUT									5	
5														
6														
7		80	FLT	3 4		4			F2W1				5	
8														
9														
10														
11														
12														
13														
14														
15														

FABRICATION Birmingham
DRAWING Roanoke
MADE BY CRM DATE 10-1-64
CHECKED BY MCA DATE 10/64
IN CHARGE OF Scott

REVISIONS: C, B, A, F, E, D

FAB. PLT. 11 SCD. CODE 2720
BAD | INCH | COST CENTERS PROD. NON PROD. | PAY BASIS CODE 01
WEIGHT REV. NO. | EXCEPTION SHIP DIVISION | LINE CONTROL 3

PAINT: None
CONTACT SURFACES: No
RIVETS:
HOLES: as noted
ORDER NO. V9803
SHEET NO. F2

BRIDGE No. 4 BOHANNAN ROAD UNDERPASS
STATE HIGHWAY DEPT. OF GA. FULTON COUNTY, GA. ~ ROGERS BRIDGE Co. INC.
NAME OF STRUCTURE Sta. 74+14.88 Type 2