STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	NHS – M002 – 00 (52)	1	15

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

OFFICE OF MAINTENANCE

DISTRICT 7 FINGER JOINT REPLACEMENT

INDEX

Sheet No.	Description	
1	Cover	
2	Revision Summary	
2	General Notes	
3	Summary of Quantities	
3	Detailed Estimate	
4-12	Bridge Plans	
	Georgia Standard Details	
13	9017K Reinforced Concrete Approach Slab	(6-85)
13A	9017M Reinforced Concrete Approach Slab with Concrete Barrier	(1-97)
13B	9017P Reinforced Concrete Approach Slab	(9-97)
14	3901 Bar Bending Detail	(8-69)
14A	4948D Type 7-C & 7-T Modified Side Barrier	(3-97)
15	9106 Traffic Control Detail	(7-99)

NOTE :
ALL REFERENCES IN THIS DOCUMENT, WHICH INCLUDES ALL PAPERS, WRITINGS, DOCUMENTS, DRAWINGS, OR PHOTOGRAPHS USED, OR TO BE USED IN CONNECTION WITH THIS DOCUMENT, TO " STATE HIGHWAY DEPARTMENT OF GEORGIA ", "STATE HIGHWAY DEPARTMENT ", GEORGIA STATE HIGHWAY DEPARTMENT ", " HIGHWAY DEPARTMENT ", OR " DEPARTMENT " WHEN THE CONTEXT THEREOF MEANS THE STATE HIGHWAY DEPARTMENT OF GEORGIA MEAN, AND SHALL BE DEEMED TO MEAN THE DEPARTMENT OF TRANSPORTATION.

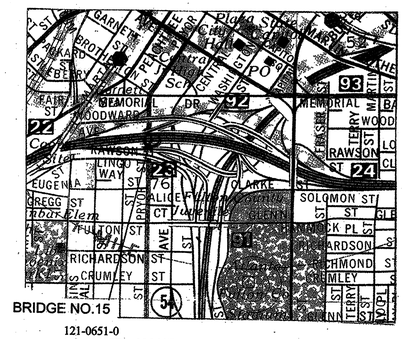

121-0651-0
121-00402D – 056.80E I-20 OVER I-75 / 85

LOCATION SKETCH

DESIGN DATA:

TRAFFIC A.D.T. :	005000 (2002)
TRAFFIC A.D.T. :	007500 (2022)
% TRUCKS :	3%
24 HR. TRUCKS :	2%
SPEED DESIGN:	55 mph
FUNCTIONAL CLASS:	NFA LOCAL NEEDS

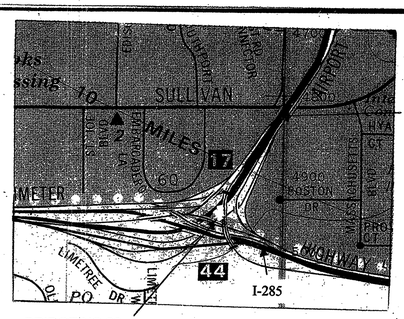

121-0620-0
121-00407R-061.34C I-285 RAMP OVER I-85

LOCATION SKETCH

DESIGN DATA:

TRAFFIC A.D.T. :	074300 (1998)
TRAFFIC A.D.T. :	111450 (2018)
% TRUCKS :	4%
24 HR. TRUCKS :	3%
SPEED DESIGN:	55 mph
FUNCTIONAL CLASS:	INTERSTATE ARTERIAL

BRIDGE NO.15
121- 0651-0
121-00402D- 056.80E – I-20 OVER I-75/85

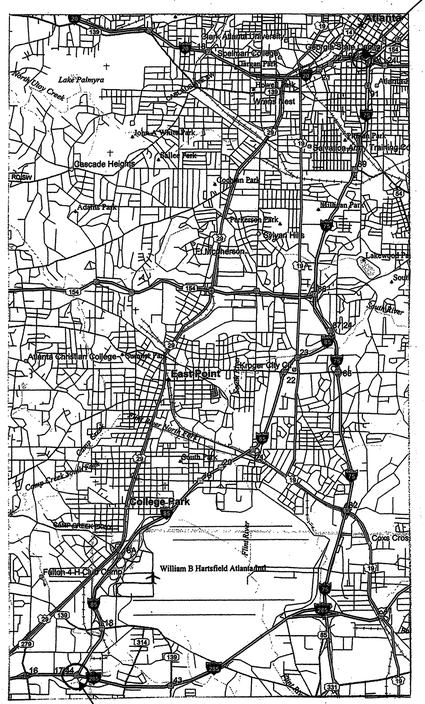

121- 0620-0
121-00407R – 061.34C I-285 RAMP OVER I-85

PROJECT NO. NHS – M002 – 00 (52)

P.I. NO. M002052

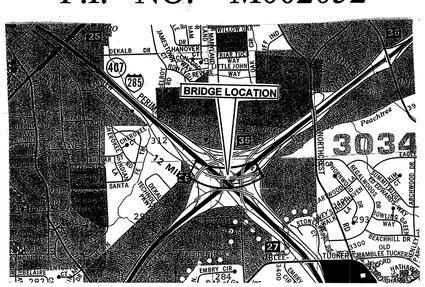

LOCATION SKETCH
BRIDGE SITE # 3
DEKALB COUNTY
1-285 RAMP EBL TO I-85 NBL
BRIDGE LOCATION ID #: 089-00407R-032.27C
BRIDGE SERIAL # 089-0276-0

DESIGN DATA
TRAFFIC A.D.T.: 20,000 (2002)
TRAFFIC A.D.T.: 30,000 (2022)
% TRUCKS: 7%
24 HOUR TRUCKS: 5%
SPEED DESIGN: 55 mph
FUNCTIONAL CLASS: INTERSTATE

THIS PROJECT IS LOCATED 67% IN FULTON COUNTY.
THIS PROJECT IS LOCATED 67% IN THE 5TH CONGRESSIONAL DISTRICT
THIS PROJECT IS LOCATED 33% IN DEKALB COUNTY,
THIS PROJECT IS LOCATED 33% IN THE 4TH CONGRESSIONAL DISTRICT

RECOMMENDED FOR SUBMISSION BY: _____
STATE BRIDGE MAINTENANCE ENGINEER

SUBMITTED BY: _____
STATE MAINTENANCE ENGINEER

9-17-02 _____
DATE CHIEF ENGINEER

PLANS COMPLETED 09-17-02	
REVISIONS 12/10/02	

LENGTH OF PROJECT	MILES
NET LENGTH OF ROADWAY	0.00
NET LENGTH OF BRIDGES	0.01
NET LENGTH OF PROJECT	0.01
NET LENGTH OF EXCEPTIONS	0.00
GROSS LENGTH OF PROJECT	0.01

THE DATA, TOGETHER WITH ALL OTHER INFORMATION SHOWN ON THESE PLANS OR IN ANYWAY INDICATED THEREBY, WHETHER BY DRAWINGS OR NOTES, OR IN ANY OTHER MANNER, ARE BASED UPON FIELD INVESTIGATIONS AND ARE BELIEVED TO BE INDICATIVE OF ACTUAL CONDITIONS. HOWEVER, THE SAME ARE SHOWN AS INFORMATION ONLY, ARE NOT GUARANTEED, AND DO NOT BIND THE DEPARTMENT OF TRANSPORTATION IN ANY WAY. THE ATTENTION OF BIDDER IS SPECIFICALLY DIRECTED TO SUBSECTIONS 102.04, 102.05, AND 104.03 OF THE SPECIFICATIONS.