5/2/2014 8:02:02 AM \\GDOT-DSN1\GOPLOT\OCF\OGC.gcf tfambro M:\M004201\M004201_PRF\M004201_0114.prf

DETAILS OF SPECIAL ROADSIDE SIGNS



6" Radius, 1" Border, White on Brown;
"Richard" E Mod; "F" E Mod;
"Sams" E Mod;
"Interchange" E Mod;

SPECIAL #10
2 EACH REQ'D
M.P. 38.1 SB APPROXIMATELY
M.P. 38.8 NB APPROXIMATELY



6" Radius, 1" Border, White on Blue;
"EXIT 40" E Mod;
"HOSPITAL" E Mod;

SPECIAL #11
2 EACH REQ'D
M.P. 38.8 SB APPROXIMATELY
M.P. 39.9 NB APPROXIMATELY



6" Radius, 1" Border, White on Green;
"Clarkston" E Mod;
"CITY LIMIT" E Mod;

SPECIAL #12
2 EACH REQ'D
M.P. 39.1 SB APPROXIMATELY
M.P. 39.6 NB APPROXIMATELY

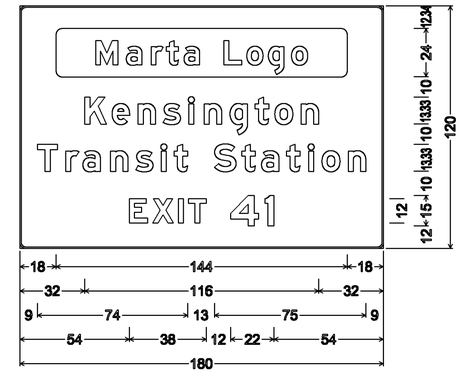

3" Radius, 1" Border, White on Green;
Rounded Rectangle 3" Radius;
"Kensington" E Mod; "Transit Station" E Mod;
"EXIT 41" E Mod;

SPECIAL #13
2 EACH REQ'D
M.P. 40.6 SB APPROXIMATELY
M.P. 42.1 NB APPROXIMATELY

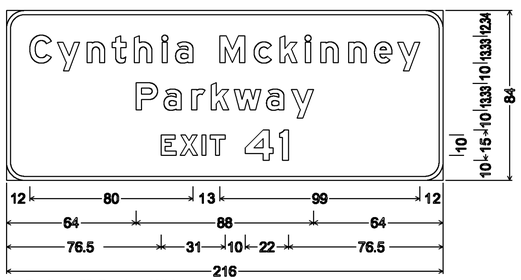

9" Radius, 2" Border, White on Green;
"Cynthia Mckinney" E Mod; "Parkway" E Mod; "EXIT 41" E Mod;

SPECIAL #14
2 EACH REQ'D
M.P. 40.4 SB APPROXIMATELY
M.P. 42.5 NB APPROXIMATELY

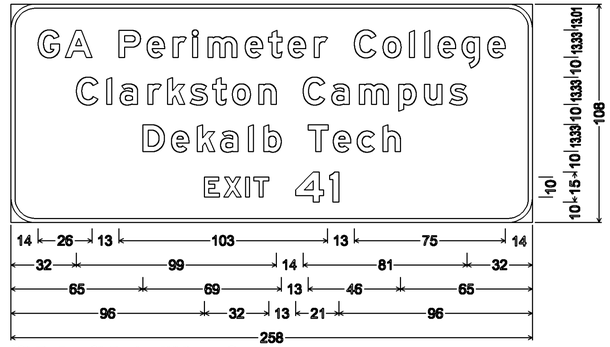

12" Radius, 2" Border, White on Green;
"GA Perimeter College" E Mod; "Clarkston Campus" E Mod;
"Dekalb Tech" E Mod; "EXIT 41" E Mod;

SPECIAL #15
2 EACH REQ'D
M.P. 40.2 SB APPROXIMATELY
M.P. 41.8 NB APPROXIMATELY

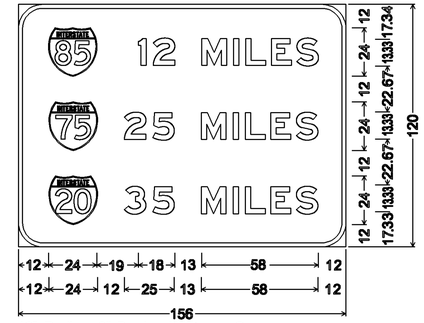

12" Radius, 2" Border, White on Green;
"12 MILES" E Mod; "25 MILES" E Mod;
"35 MILES" E Mod;

SPECIAL #16
1 EACH REQ'D
M.P. 44.9 NB APPROXIMATELY



6" Radius, 1" Border, White on Brown;
"Tom" E Mod;
"Moreland" E Mod;
"Interchange" E Mod;

SPECIAL #17
1 EACH REQ'D
M.P. 34.1 NB APPROXIMATELY

USE ON CONSTRUCTION

GEORGIA
DEPARTMENT OF TRANSPORTATION

NOT TO SCALE

DATE	REVISIONS
9/10/13	REV SIGN SIZES
4/11/14	REV SIGN SIZES

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: ROADWAY DESIGN
SIGNING AND MARKING PLANS
OVERHEAD SIGNS TO BE REMOVED AND REMOUNTED

NUMBER 26-091

5/2/2014 8:02:02 AM \\GDOT-DSN1\GOPLOT\OCF\OGC.gcf tfambro M:\M004201\M004201_PRF\M004201_0114.prf